

Certified, Filed and or Recorded on  
Nov. 04, 2008 AT 12:29PM

Signed: BW  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 9, Township 38, Range 29  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-28-08 found a 1/2" OPEN IRON PIPE

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

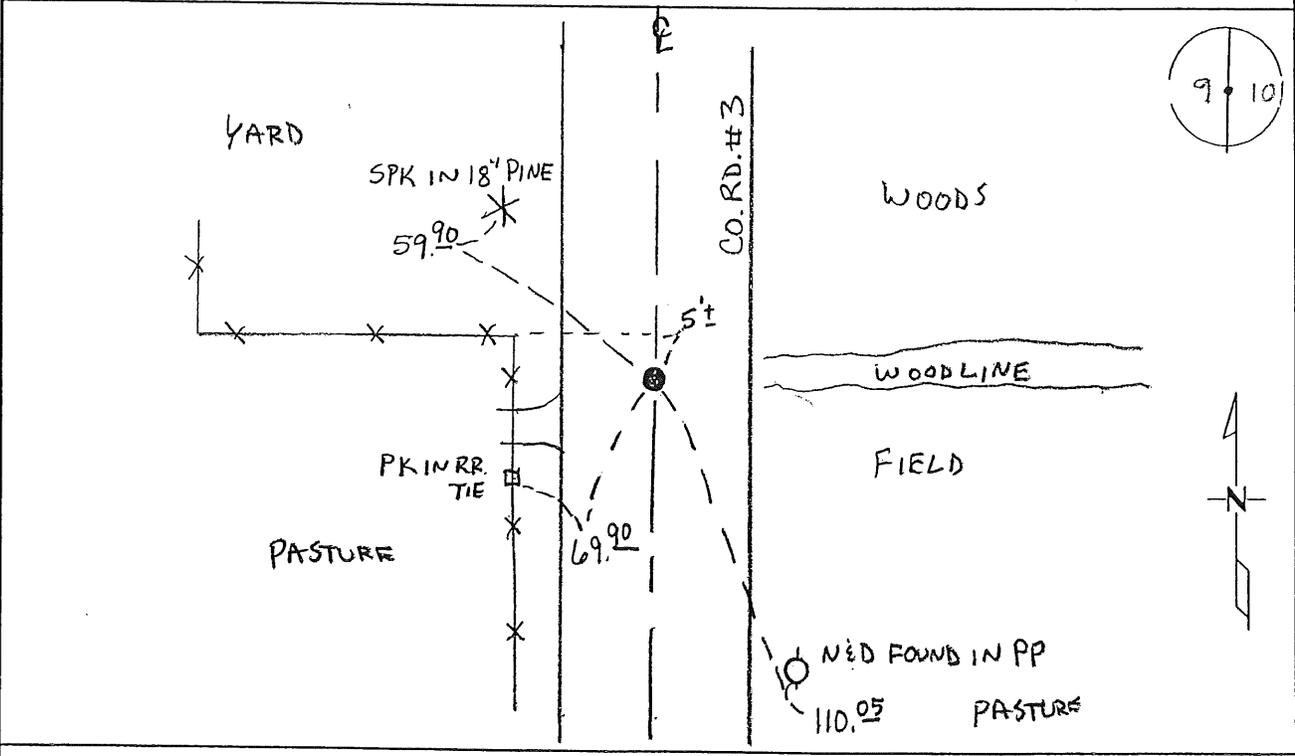

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 11/3/08

Statement of Evidence:

B093

East Quarter Corner of Section 9, Township 38 North, Range 29 West, Alberta Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at the location and bearing trees were recorded.

10" Birch	S 50 W	11 links
10" Aspen	N 89 E	20 links

1932 County Engineer's Notebook No. 66 contains road survey for SAR 3 running south to north. Notes show corner marked by a hub with fence lines east and west. Ties:

24" R. Oak	SW	52.6'
Twin ironwood	W	47.5'

Stationing gives distances of 2703.7 feet to the SE corner and 2657.8 feet to the NE corner.

1951 County Engineer's Notebook No. 190 contains survey of SAR No. 3 running from the south to north. Corner is shown as a hub in road fence lines running east and west. Same ties as listed below. Stationing gives distances of 2658.9 feet to the NE corner and 2694.0 feet to the SE corner with no delta angle.

County Surveyor's Record Book 2, page 254, notes ties to a hub:

FP	SW	39.2
FP	SE	37.3
6" Birch	W	60.8

1978 Paul Wellen, LS 10461, found a 1/2" I.P. at the centerline of a road north/south and in line a fence line west starting 500 feet west of the corner. He filed a Certificate of Location (#151869). Notes give measurements of 2694.85 feet to the SE corner and 2659.53 feet to the NE corner.

2008 Westwood Professional Services, Inc. found a 1/2" iron pipe fitting 1978 Wellen ties and distances to the NE and SE corners. 1/2" iron pipe is accepted as marking the obliterated position for this corner.

County Coordinates Obtained by GPS

NAD 83 (1996 Adjustment)

N-188599.549

E-526324.008

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East 1/4 Corner of Section 9, Township 38, Range 29, \_\_\_\_\_ P.M.  
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES



Filed under West 1/4 Corner Section 10 , T 38 R 29

Certificate # 151869

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

\_\_\_\_\_  
SIGNATURE DATE

Registration No. \_\_\_\_\_

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I did set the North<sup>1/4</sup> Corner of Section 10, Township 38, Range 29, 4 P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch: was evidenced by 1/2" iron pipe, on the center line of east-west County Road No. 22 and on the center line of

On 10-17-78 found a north-south township road  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a 1/2" iron pipe  
DATE

### SKETCH OF REFERENCE TIES



Refer to next page

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Wellen  
SIGNATURE DATE

Registration No. 10461

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

County Recorder  
OFFICE OF THE REGISTER OF DEEDS  
Benton  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at 10 A: .M. on the 26 day of March A.D., 19 79

Register of Deeds P.E. Johnson  
By \_\_\_\_\_, Deputy

DOCUMENT NO. 151874