

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EASTQUARTER Corner of Section 11, Township 38, Range 29, _____ P.M.
STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 4-27-93 found a 60 PENNY NAIL
DATE

left monument as found, lowered monument, removed monument (explain)

On 6-17-93 placed a STANDARD CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

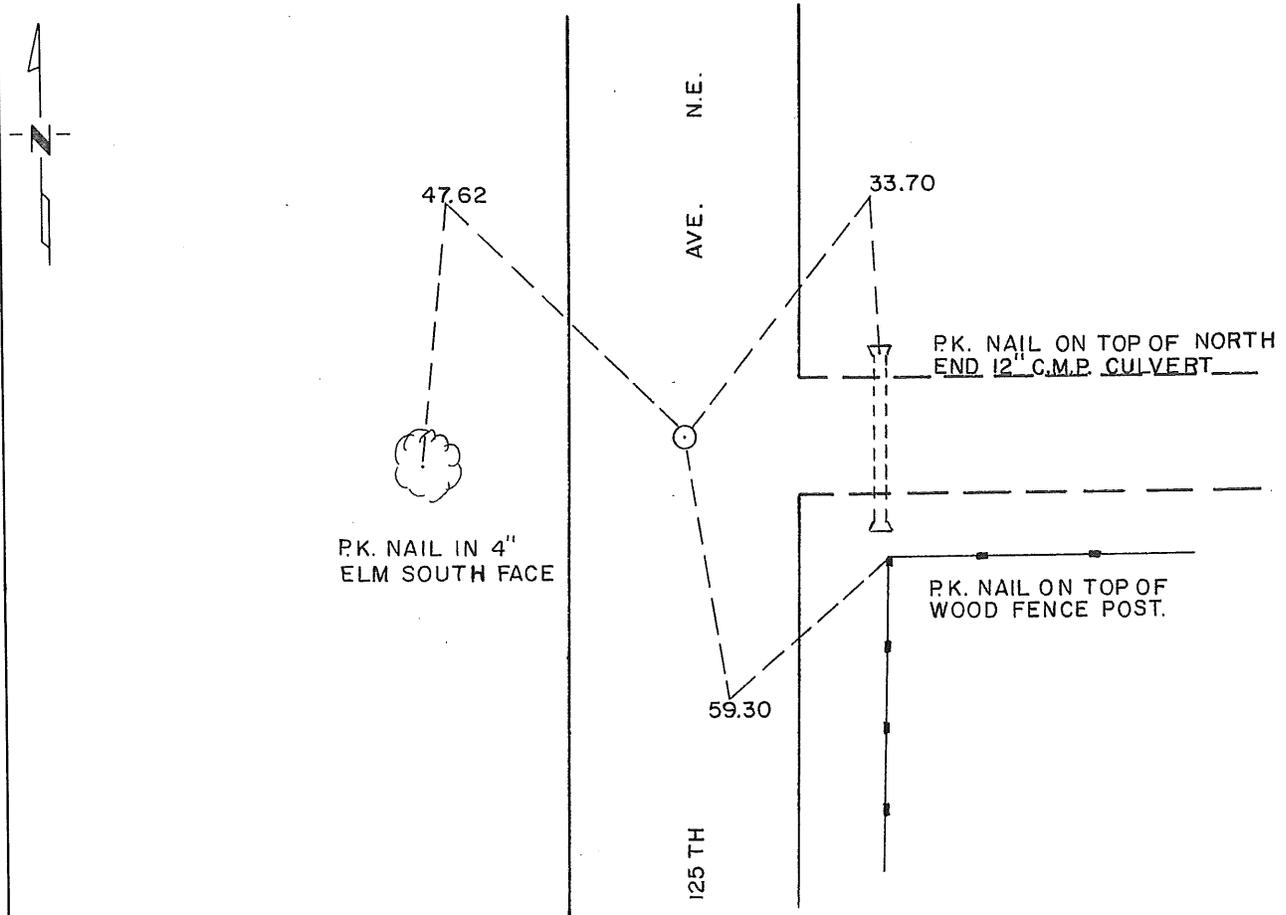

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sidney P. Williamson 5/21/94
SIGNATURE DATE

Registration No. 10918

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

1. The original government survey was performed in 1855.
2. The 1960 Benton County Highway Department Road plans indicate a Point of Intersection at the intersection of C.S.A.H. No. 14 and Township Road to the east. It measured 2609.3 feet to the southeast corner.
3. In 1993, Williamson-Kotsmith, Inc. dug with a jackhammer at this location and found a 12" spike at this location. It measured 2609.93 feet to southeast corner of Section 11 and 2669.25 feet to the northeast corner.
4. On June 17, 1993, Williamson-Kotsmith, Inc. set a Standard Cast Iron Monument at this location.

223494

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JUN 17 1 10 PM '94

ALICE G. FREINBERGER
COUNTY RECORDER

BY *Jed* DEPUTY