

A 375356

Certified, Filed and or Recorded on
July 13, 2010 AT 04:13PM


Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 13, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 07/09/10 found a 1/2" REBAR 2 FT WEST OF N/S CENTERLINE
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____

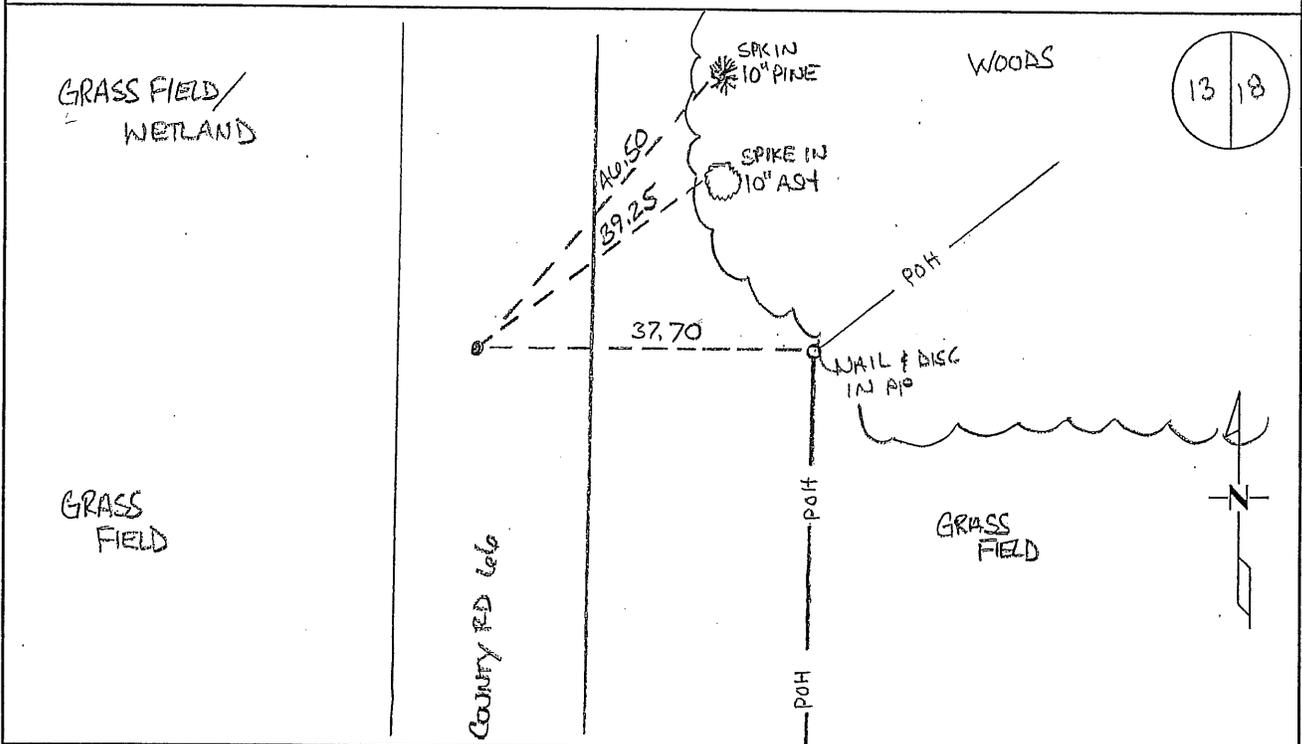

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 7/12/2010

Hwn Dept

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:**B132**

Northeast Corner of Section 13, Township 38 North, Range 29 West, Alberta Township,
 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey established corner marked with a wood post and bearing trees noted as:

8" Tamarack	N 45 E	13 links
6" Tamarack	N 72 W	19 links
10" Tamarack	S 45 W	43 links
8" Tamarack	S 63 E	19 links

Line trees were noted as a 8" Tamarack South 16.00 chains and a 14" Sugar North 23.09 chains.

1936 County Engineer's Notebook No. 101 shows survey for road running south to north. Notes show corner marked by an iron pipe with town road west. No ties.

1974 County Surveyor's Record Book 2, page 262, notes an iron with the following reference tie:

3rd FP E 46.0

(Note in Notebook No. 101 shows iron found.)

1984 Paul Wellen, LS 10461, found a 2" solid iron and replaced it with a cast iron monument. He filed a Certificate of Location (#173400).

2010 The Benton County Surveyor's Office found a 1/2" rebar marking the corner position in the north-south centerline of County Road 66, on the centerline of 155TH St. NE to the west and on a fence to the east. The distance north fits the 1936 distance flat and the distance south proportionally for the mile. Since the 1/2" rebar fits the long-standing occupation lines and resurvey distances, it is accepted as marking the obliterated corner position. GPS coordinates were obtained and reference ties established.


Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-185575.013
 E-542136.515

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 6 day of June, 19 84
 I did set _____ the EAST 1/4 corner of Section 13,
 Twp. 38, Rg. 29, BENTON County, Minnesota, which
 was evidenced by _____

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of CAST IRON MONUMENT and that
 I did establish witness or reference monuments as shown below:

147E
 14.5E
 338 29
 full NW
 30.50
 1.3828

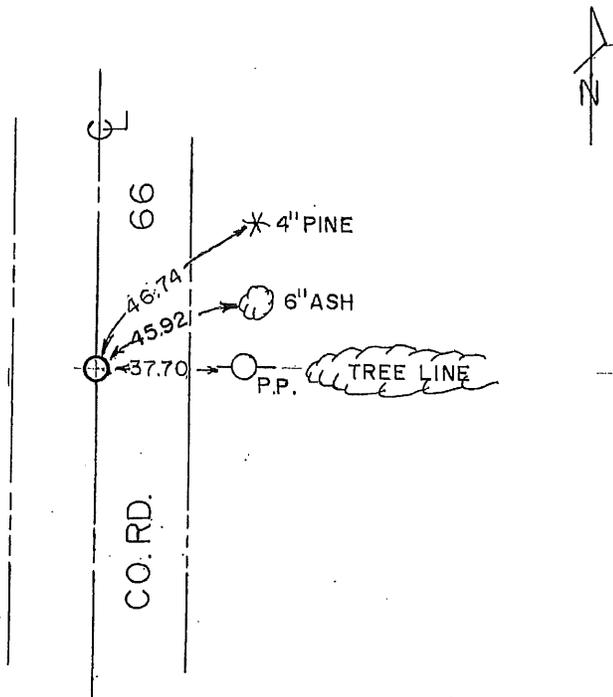

173401

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

Sam J. Miller

Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 16 day of May, 19 85 at 11:00 A.M.

Alice C. Engelmeier
 County Recorder

By NO Deputy.