

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EASTQUARTER Corner of Section 14, Township 38, Range 29, _____ P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 4-27-93 found a 3/4" SOLID IRON
DATE

left monument as found, lowered monument, removed monument (explain)

On 6-17-93 placed a STANDARD CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

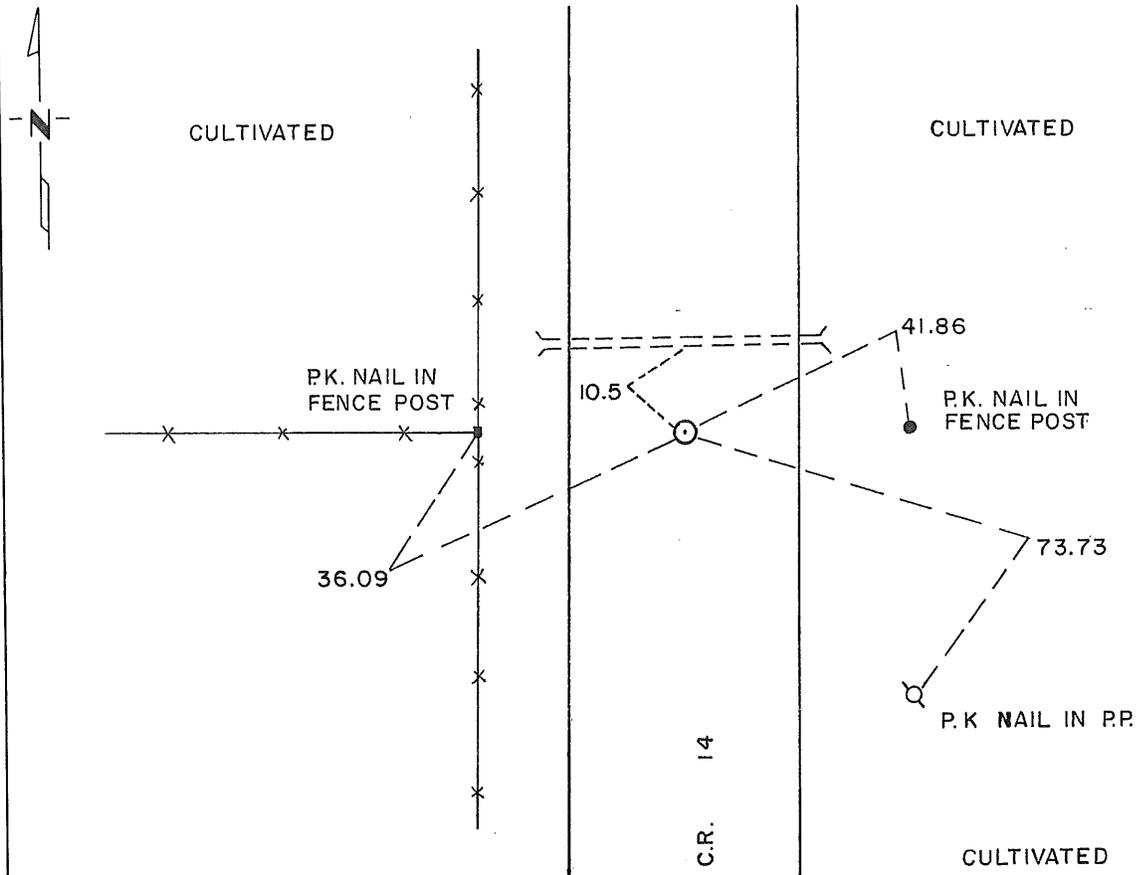

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sidney P. Williamson 5/24/94
SIGNATURE DATE

Registration No. 10918

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

1. In 1855, the Original Government Survey was performed.
2. The Benton County Survey Records indicate an iron at this corner.
3. In 1963, the Benton County Highway Department measured 2658.3 feet to the northeast corner and 2650.7 feet to the southeast corner.
4. On April 27, 1993, Williamson-Kotsmith, Inc. found a ½ inch solid pin on the centerline of C.R. 14 and fence lines east and west. Williamson-Kotsmith, Inc. measured 2658.79 feet to the northeast corner and 2651.58 feet to the southeast corner.
5. On June 22, 1993, Williamson-Kotsmith, Inc. removed ½ inch solid pin and set a Standard Cast Iron Monument at the same location.

223492

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JUN 17 1 10 PM '94

ALICE G. SCHMIDT
COUNTY RECORDER

BY Jw DEPUTY