

Certified, Filed and or Recorded on
Nov. 04, 2008 AT 12:34PM

Signed: fw
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 19, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-29-08 found a 1/2" IRON PIPE # 42621

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

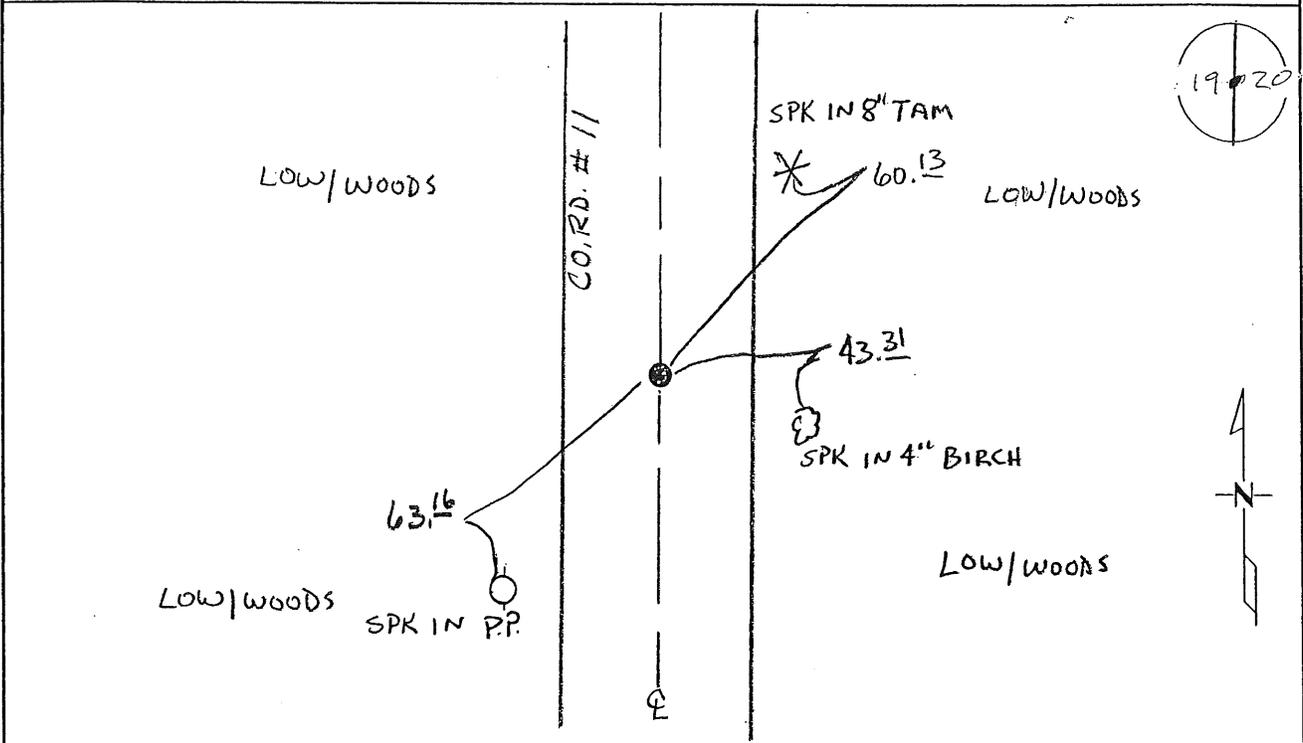

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:**B193**

East Quarter Corner of Section 19, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at the location and bearing tree was recorded.

9" Tamarack	S 36 W	14 links
13" Tamarack	N 34 E	10 links

1935 County Engineer's Notebook No. 93 contains survey for Road running from south to north. Notes corner as a hub set in road with fence line west. Ties:

Hub	E	33.8
Birch	SE	53.05

Stationing gives distances of 2697.8 feet to the SE corner and 2702.6 feet to the NE corner with a delta angle of 0-38' right.

1963 County Surveyor's Record Book 2, page 274, (also noted in Notebook No. 93) notes found hub on fence line east and placed iron with ties:

PP	SW	63.6
TP	NE	55.1
12" Birch Stump	SE	53.3

1964 County Engineer's Notebook No. 246 contains survey for CSAH 11 running south to north on section line. Notes show corner marked by an iron in center of road with fence east. Ties are the same as above in 1963. Stationing gives distances of 2698.2 feet to the SE corner and 2703.0 feet to the NE corner with a delta angle of 0-41' right.

2007 Excavated 8-foot (east-west) x 12-foot (north-south) x 4-foot deep hole. Found ¼-inch iron rod down 3.5 feet. Position fits the 1964 position. The 1963 tie to the power pole to the southwest fits within a half a foot – power pole is leaning. Position falls in north-south centerline approximately 3 feet south of a fence to the east.

Coordinates Obtained from Bonestroo Engineering
 NAD 83 (1996 Adjustment)
 N-177677.230
 E-516030.030

2008 Westwood Professional Services, Inc. found a ½" iron pipe capped 42621 in the centerline of County Road 11 (running north/south). Coordinates obtained by GPS coincide with 2007 Bonestroo position. Iron pipe capped 42621 is accepted as marking the obliterated position for this corner.