

Certified, Filed and or Recorded on
July 27, 2010 AT 11:41AM


Signed: BW
MARILYN J NOVAK . G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 25, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 07/13/10 found a 1/2" IRON PIPE R.C.#19552
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____

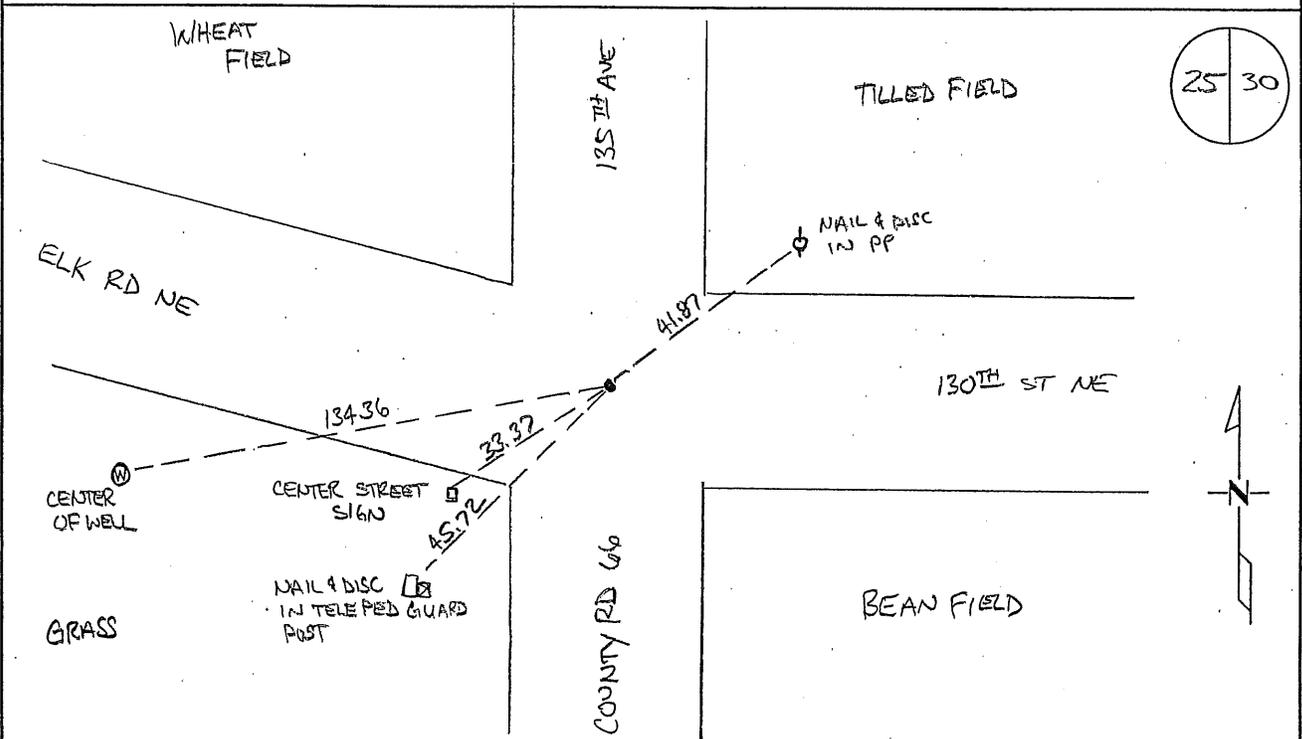

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 7/26/2010

Statement of Evidence:**B253**

East Quarter Corner of Section 25, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

6" Sugar	N 3 E	23 links
12" Sugar	S 42 W	20 links

A line tree is noted as a 10" Basswood South 18.33 chains.

1912 County Surveyor's Record Book 2, page 306, lists ties to a stone over an iron monument:

T.P.	SW	29
SE Corner of barn	SW	173

1912 County Engineer's Notebook No. 2, pages 49 and 50, contains a road survey for SR No. 14 by M. J. Cleveland. Survey runs north-south on section line. Notes show pipe at the corner with stone placed over the pipe. Stationing gives distances of 2647 feet to the SE corner and 2647 to the NE corner of Section 25.

Ties:

T. P.	S 53 W	29'
SE corner of barn	S 82-30 W	173'

1936 County Engineer's Notebook No. 101 shows survey for road running south to north. Notes show corner marked by an iron pipe with town roads east and NW.

Ties:

Hub	NE	41.25'
Hub	SE	45.25'

Stationing gives distances of 2645.6 feet to the SE corner and 2648.5 feet to the NE corner with a delta angle of 0-11' right.

2001 Westwood Professional Services, Inc. found a RR Spike at the intersection of the centerlines of County Road 66 (running north and south) and 130th Street NE (running east) and Elk Road (running northwest). No iron was detected under the RR Spike. The barn to the west is gone and the area appears to have been bulldozed, with some evidence of concrete pieces of a foundation found, but nothing that could be used as a tie.

Westwood Professional Services, Inc. set a cast iron monument at the location of the RR Spike and established new reference ties.

2004 Westwood Professional Services, Inc. measured 2643.75 feet to the SE corner and 2651.84 feet to the NE corner of Section 25. County Coordinates Obtained by GPS to CIM

NAD 83 (1996 Adjustment)
N- 172341.048
E- 542347.125

Benton County Surveyor's Office
Jerome C. Wittstock, County Surveyor
Minnesota License No. 19552

- 2007 The Benton County Surveyor's Office excavated the corner position, but no additional corner evidence was found. The CIM position fits the 1936 distances north and south within 4 and 2 feet respectively and falls 4 feet south and 3 feet west of the lost position. Believing the CIM to be the best available evidence, fitting the 1912 and 1936 information within 4 feet, it is accepted as marking the obliterated corner position. A 1/2" by 14" iron pipe capped RLS 19552 was set at the road surface to mark the location.
- 2010 The Benton County Surveyor's Office found the capped iron pipe, verified the 2004 coordinates and established new reference ties as shown.