

Certified, Filed and or Recorded on
Dec. 24, 2008 AT 08:58AM

Signed: BW
MARILYN J NOVAK B V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 29, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 11-11-08 found a CAST IRON MONUMENT

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

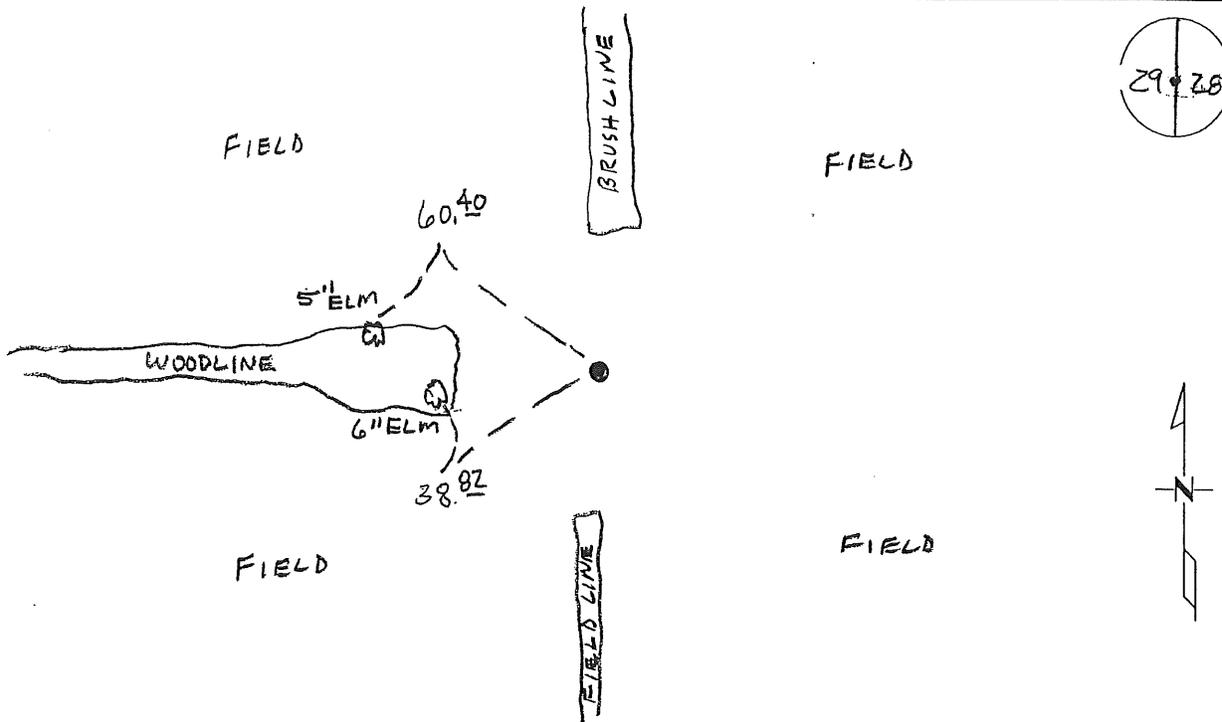

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 12/17/08

Statement of Evidence:

B293

East Quarter Corner of Section 29, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded:

13" Sugar	N 80 W	11 links
9" Sugar	N 11 E	30 links

1981 Paul Wellen, LS 10461, set a cast iron monument at the lost position, on line and midway between section corners. Position fits tree lines north, south, and west. He filed a Certificate of Location (#160212).

2002 No resurvey information was found on this corner in the Benton County records.

2008 Westwood Professional Services, Inc. found a CIM at the intersection of tree/field lines north/south/west. CIM is on line between NE and SE corners of Section 29, but 1.85 feet north of the lost position. Position fits existing occupation and is accepted as marking the obliterated location for this corner.

County Coordinates Obtained by GPS

NAD 83 (1996 Adjustment)


N-172329.131

E-521439.021

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 21st day of July, 19 81
I did set the east quarter corner of Section 29,
Twp. 38N, Rg. 29W, Benton County, Minnesota, which
was evidenced by Tree line north, south and west. Corner is set on line and
at an equal distance between the northeast corner and the southeast corner of
Section 29.

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of a Benton County Cast Iron Monument and that
I did establish witness or reference monuments as shown below:

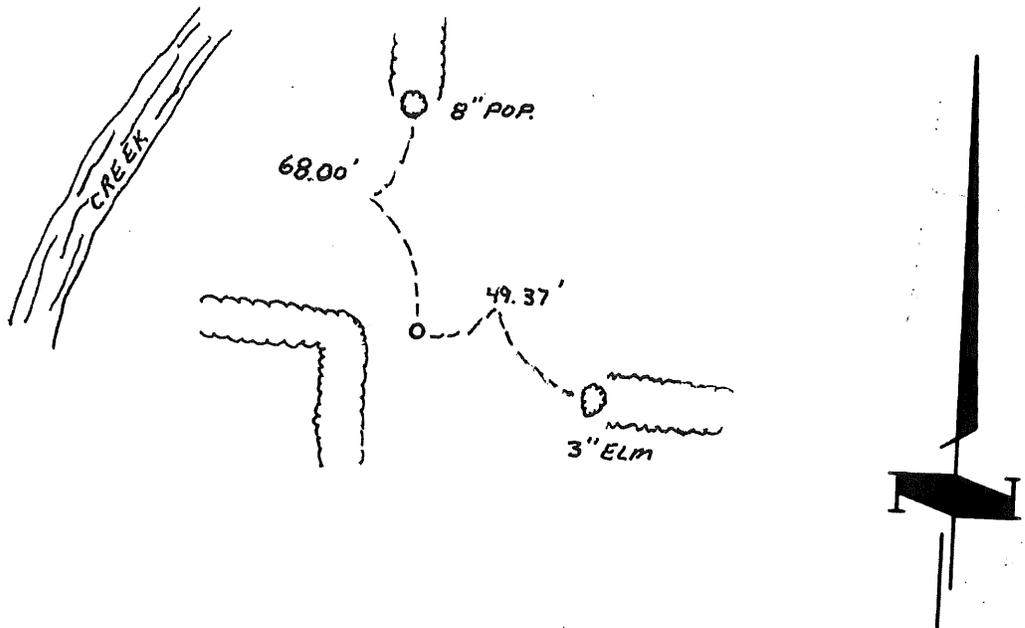

160212

I hereby certify that the above
is true and correct and that I am
a registered Land Surveyor under
the laws of the State of Minnesota.

Paul J. Allen

Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
was filed for record in this office on the
10th day of September, 1981 at 2 P.M.

F.A. Johnson
County Recorder

By _____ Deputy.