

Certified, Filed and or Recorded on  
Dec. 24, 2008 AT 08:58AM

Signed: BW  
MARILYN J NOVAK B V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 33, Township 38, Range 29  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 11-11-08 found a 3/8" SOLID IRON ROD

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

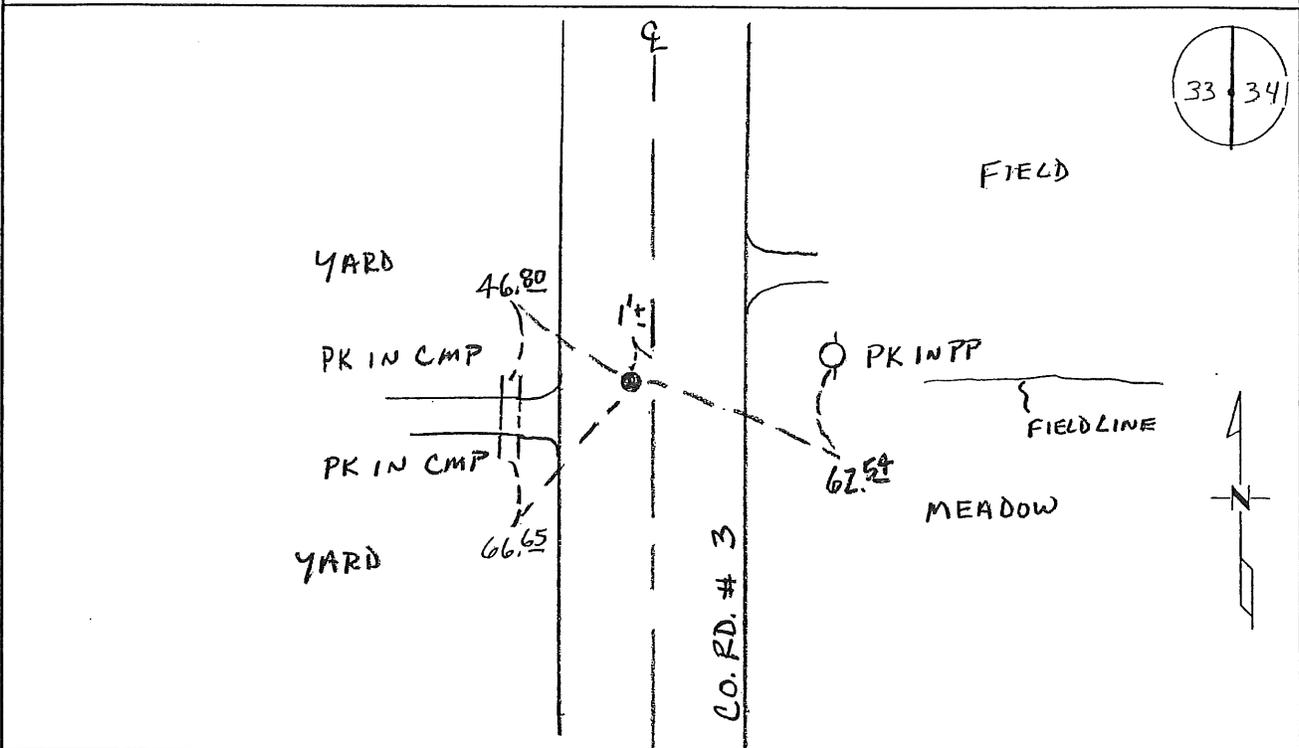

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 12/17/08

**Statement of Evidence:**

**B333**

East Quarter Corner of Section 33, Township 38 North, Range 29 West, Alberta Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- |            |        |          |
|------------|--------|----------|
| 12" Elm    | N 84 E | 11 links |
| 6" Blk Ash | S 84 W | 21 links |
- 1895 County Surveyor's Record Book 2, page 236, shows a survey by Felix Parent of Section 34. He notes the corner being found.
- 1902 County Surveyor's Record Map No. 36 shows a survey of Section 33 by John Whilt and County Surveyor's Record Book 2, page 302. Survey shows corner marked by a post with a distance of 40.66 chains (2683.56 feet) to the NE corner Sec 33 and a distance of 41.52 chains (2740.32 feet) to the SE corner Sec 33.
- 1915 County Surveyor's Record Book 2, page 237, notes that J.P. Soderstrum found a large fence post at the corner location.
- 1951 County Engineer's Notebook No. 190 contains survey of SAR No. 3 running from the south to north. Corner is shown as a fence post with fences running north-south and west. Stationing gives distance of 2720.0 feet to the NE corner.
- 1983 David Regan, LS 12236, set a 1/2" I.P. in the centerline of roads north/south using old survey information for the section. He filed a Certificate of Location (#167999). His distance to the SE corner is 2737.20 feet.
- 2003 Westwood Professional Services, Inc. found a spike in center of north-south road. 1983 ties are gone, but spike fit Regan's survey information from the SE corner (2737.16 feet) and a capped iron pipe 12236 marking the right of way was found 60.0 feet west. Measured 2721.44 feet to approximate NE corner.  
County Coordinates Obtained by GPS to spike:  
NAD 83 (1996 Adjustment)  
N- 167035.767  
E- 526844.161
- 2008 Westwood Professional Services, Inc. found a 3/8" solid iron rod in center of north-south road. Measured 2721.44 feet to the NE corner which agrees with 1951 distance and 2737.16 feet to the SE corner which agrees with 1902 County Surveyor's record and 1983 Regan distance. Solid iron rod is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2003 position.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter \_\_\_\_\_ Corner of Section 33, Township 38, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

■ On 11/16/83 placed a  $\frac{1}{2}$  inch iron pipe in center line of County Road  
DATE  
~~north-south~~ from old survey information in section of section \_\_\_\_\_

### SKETCH OF REFERENCE TIES

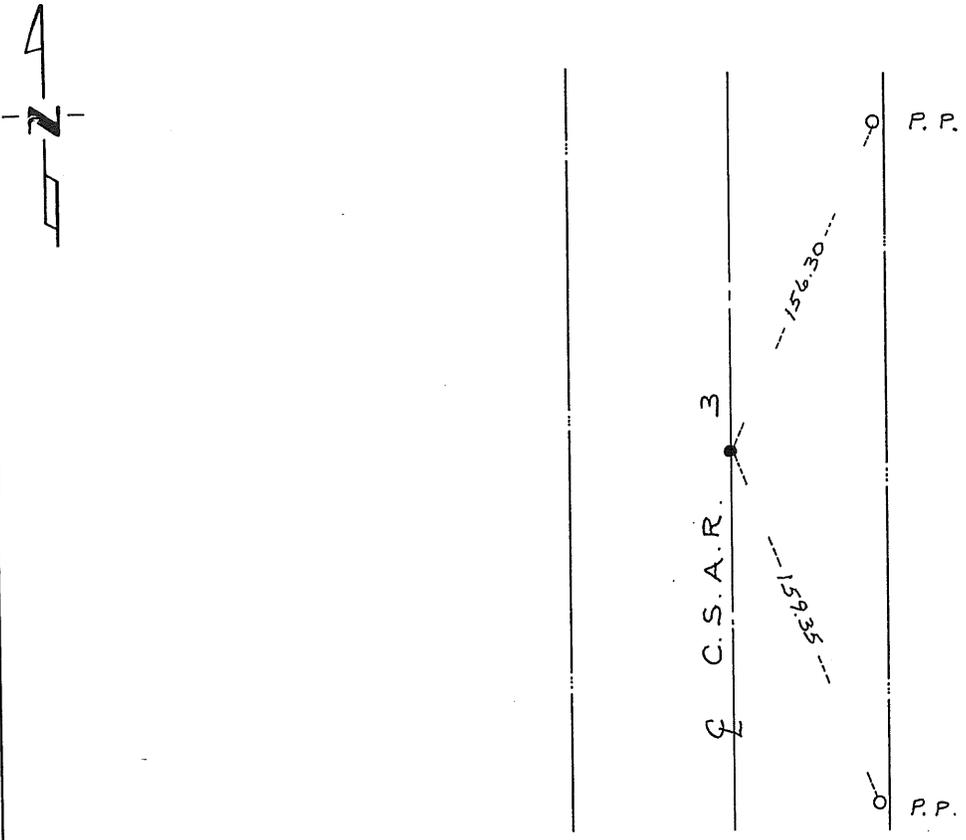

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David G. Regan 1/3/84  
SIGNATURE DATE

Registration No. 12236

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

*County Recorder*  
OFFICE OF THE REGISTER OF DEEDS  
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 4 P.M. on the 11th day of January A.D., 1984

Register of Deeds Fel. Johnson

By \_\_\_\_\_, Deputy

DOCUMENT NO. 167999