

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EASTQUARTER Corner of Section 34, Township 38, Range 29, _____ P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 4-27-93 found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 10/8/93 placed a STANDARD CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

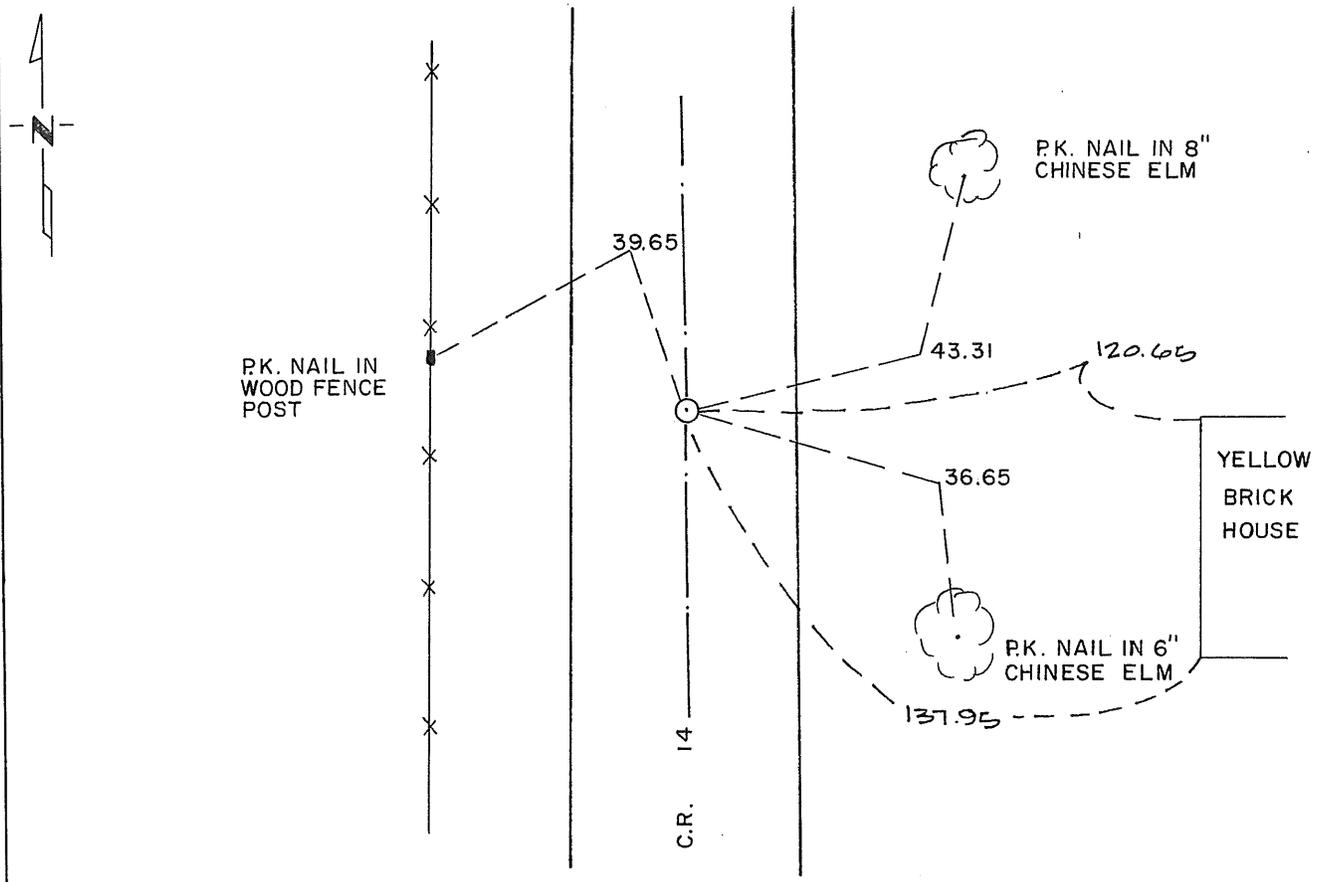

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sidney F. Williamson 5/24/94
SIGNATURE DATE

Registration No. 10918

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

1. The original government survey was performed in 1855.
2. On April 22nd 1895 Felix Parent, Benton County surveyor measured 83.71 chains (5524.86) on the line between Sections 34 and 35 and established the quarter section corner at 41 chains 85½ links (2762.43 feet).
3. In 1960 the Benton County Highway Department measured 5543.6 feet on the line between Sections 34 and 35.
4. In 1993, Williamson-Kotsmith, Inc. measured 5546.05 feet on the line between Section 34 and 35. In October 1993, Williamson-Kotsmith, Inc. set a Standard Benton County Monument on single proportionate measurement.

223488

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JUN 17 1 10 PM '94

ALICE S. EMMERT
COUNTY RECORDER

BY *Jed* DEPUTY