

Certified, Filed and or Recorded on
July 27, 2010 AT 11:43AM


Signed: BW
MARILYN J NOVAK · G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 36, Township 38, Range 27
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 07/13/10 found a 1/2" IRON PIPE RLS #19552 2' EAST OF NORTH/SOUTH CENTERLINE AND 2 FT NORTH OF FENCES EAST & WEST
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____

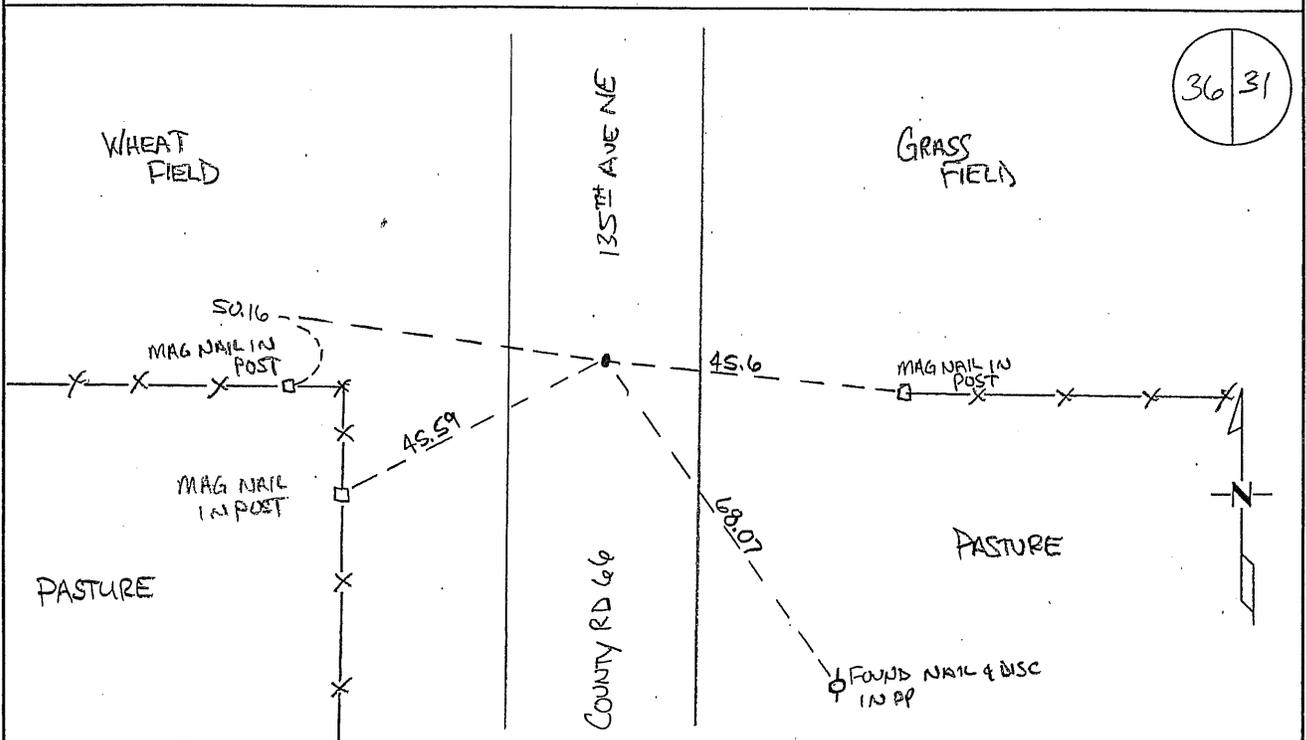

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wadsworth
Benton County Surveyor
License No. 19552

Date: 7/26/2010

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

B363

East Quarter Corner of Section 36, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|------------|--------|----------|
| 14" W. Oak | S 62 W | 18 links |
| 12" Sugar | N 28 E | 23 links |
- 1912 County Engineer's Notebook No. 2, pages 49 and 50, contains a road survey for SR No. 14 by M. J. Cleveland. Survey runs north-south on section line. Notes show post at the corner "lost". Stationing gives distances of 2640 feet to the SE corner and 2654 to the NE corner of Section 36.
- 1936 County Engineer's Notebook No. 101 shows survey for road running south to north. Notes show corner marked by a large rock with + and fence west. Ties:
- | | | |
|--------|----|-------|
| 8" Oak | SE | 76.3' |
| 8" Oak | NE | 77.3' |
- Stationing gives distances of 2638.2 feet to the SE corner and 2653.1 feet to the NE corner with a delta angle of 0-35' left.
- 1973 County Surveyor's Record Book 2, page 296, notes: An iron placed over a rock with an 'x' with the following ties:
- | | | |
|----------------------|----|-------|
| PP | SE | 64.4' |
| 3 rd F.P. | W | 58.9' |
- (Also noted in Book 101)
- 2001 Westwood Professional Services, Inc. found a PK at the intersection of the centerlines of County Road 66 (running north and south) and a fence line (running east and west). There was nothing under the PK. Westwood Professional Services, Inc. set a cast iron monument at the location of the PK and established new reference ties.
- 2004 Westwood Professional Services, Inc. obtained coordinates to the CIM by GPS. Check for 1973 ties and found:
- | | | |
|----------------------|------|-----------------------|
| PP | SE | 65.94' (Could be new) |
| 3 rd F.P. | West | 58.4' |
- Measured 2634.15 feet to the SE corner and 2655.73 feet to the NE corner, which compares reasonably to the 1912 stationing.
- County Coordinates Obtained by GPS to CIM **(Do not use)**
 NAD 83 (1996 Adjustment)
 N- 167042.371
 E- 542438.708

Benton County Surveyor's Office
Jerome C. Wittstock, County Surveyor
Minnesota License No. 19552

- 2006 Westwood Professional Services excavated a 10-foot x 10-foot x 3-foot deep hole. A 6-inch x 12-inch x 18-inch red granite stone with a + on top of the stone was found down 2 feet. No additional corner evidence was found. Stone falls approximately 3.5 feet northeast of CIM, measuring 2634.15 to the southeast corner and 2655.73 to the northeast corner of Section 36-38-29. These distances fit reasonably well with the 1912 and 1936 distances. A 1/2-inch x 15-inch iron pipe capped 19552 was set over the stone.

County Coordinates Obtained by GPS to Stone
NAD 83 (1996 Adjustment)
N-167045.566
E-542440.323

- 2010 The Benton County Surveyor's Office found the capped iron pipe, verified the 2006 coordinates and established new reference ties as shown.