

Certified, Filed and or Recorded on  
Nov. 04, 2008 AT 12:33PM


Signed: BW  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 4, Township 38, Range 29  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10-29-08 found a 1/2" IRON PIPE CAP ?
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

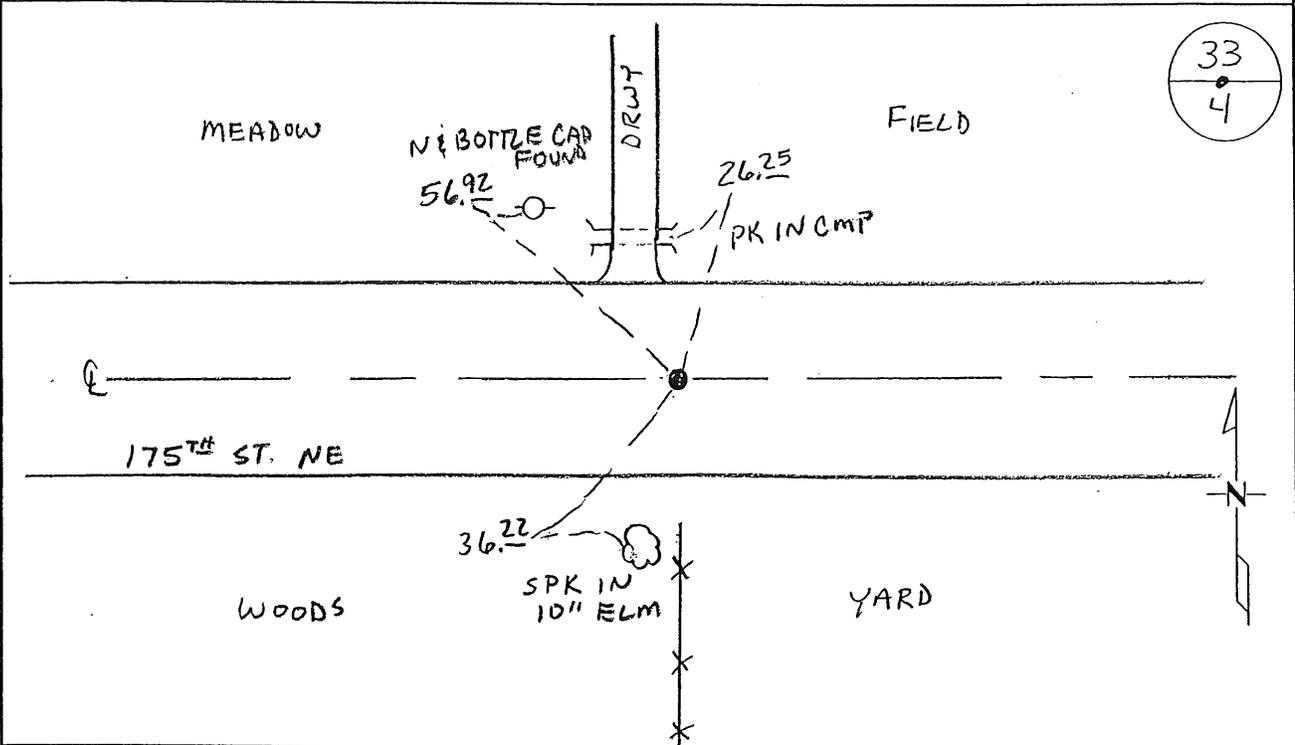

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office  
 Chris Hogle, Deputy County Surveyor  
 Minnesota License No. 43932

**Statement of Evidence:****B041**

North Quarter Corner of Section 4, Township 38 North, Range 29 West, Alberta Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a wood post and bearing trees noted as:

12" Blk Oak	N 18 W	14 links
6" Maple	S 17 W	23 links

Line trees were noted as a 10" Poplar East 22.50 chains and a 8" Sugar West 20.42 chains.

2002 No resurvey information was found on this corner in the Benton County records.

2004 Certificate of Survey by David Regan, LS 12236, shows iron pipe found at the corner.

2008 Westwood Professional Services, Inc. found a ½" iron pipe with unreadable cap at the intersection of the centerline of 175<sup>th</sup> St. NE and a fence line to the south. Position falls 10.63 feet north and 7.31 feet west of lost position. Measured 2676.78 feet to the NW corner and 2691.40 feet to the NE corners of Section 4. Road centerlines and historic fence lines are longstanding evidence of section line location. ½" iron pipe is accepted as marking the obliterated position for this corner.

County Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-196633.488  
 E-523174.028