

Certified, Filed and or Recorded on
Apr. 20, 2010 AT 11:23AM


Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 10, Township 33, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 4/5/2010 found a 1/2" iron pin
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

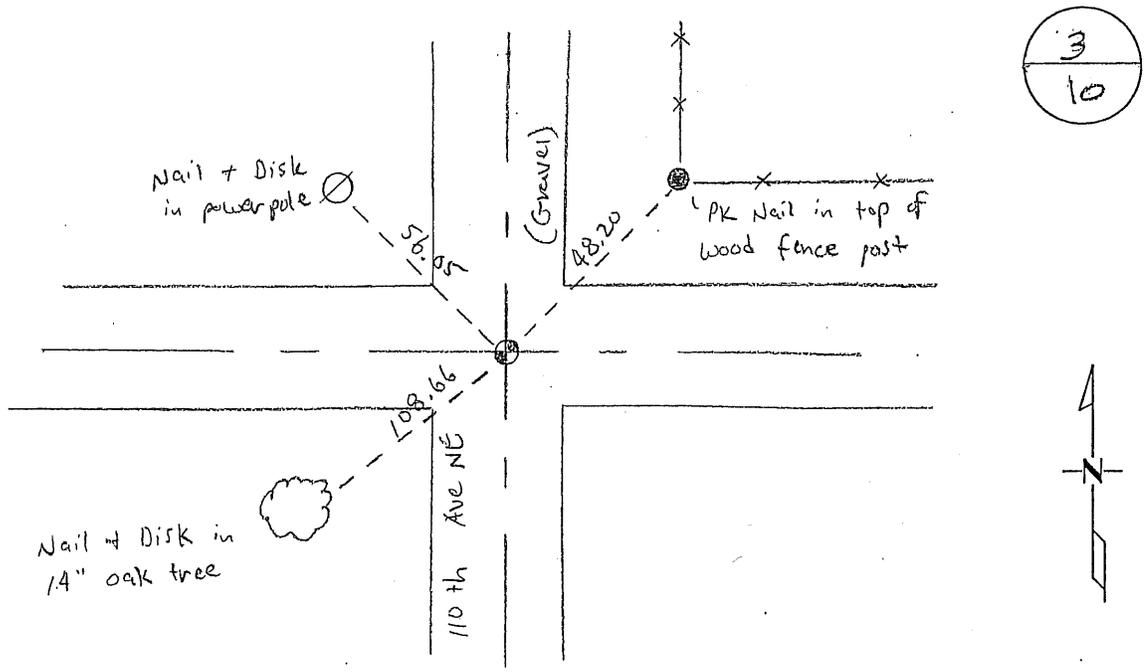

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 20 April 2010

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:**B101**

North Quarter Corner of Section 10, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

6" Aspen	S 89 E	281 links
9" Aspen	N 88 ½ W	76 links

1939 County Engineer's Notebook No. 128 contains survey of CAR 22 running east to west on section line. Corner is shown as a spike set in center of 4-way road intersection. Ties:

Cor. FP	NE	40.5'
Cor. FP	NW	46.65'

Stationing gives distances of 2648.9 feet to the NE corner and 2658.4 feet to the NW corner with a delta angle of 0-31' right.

1958 County Engineer's Notebook No. 207 contains a survey for CSAH No. 22 running west to east on the section line. Corner is shown as a PI in center of road with town road north-south. Ties:

TP	SE	62.0
12" Maple	SW	108.4

Stationing gives distance of 2652.0 feet to the NW corner and 2657.7 feet to the NE corner with a delta angle of 0-27 ½ ' left.

1978 Paul Wellen, LS 10461, found a ½ " iron pipe in road intersection and filed a Certificate of Location (Doc. No. 151874). His notes give a distance of 2655.82 feet to the NE corner and a distance of 2651.20 feet to the NW corner of Section 10.


2010 Westwood Professional Services, Inc. found a ½ inch pin and verified two ties from Wellen's certificate of location and the Maple Tree from 1958 now measuring 24". The area 8 feet east of the found iron pin was searched with a metal locator as the distances from 1939 point to that location, but no additional evidence was found.

Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-191163.486
 E-528961.499

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 17 day of October, 19 78
 I did set _____ the North 1/4 corner of Section 10,
 Twp. 38, Rg. 29, Benton County, Minnesota, which
 was evidenced by a 1/2" iron pipe, on the center line of east-west
County Road No. 22, and on the center line of north-south township road.

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of a 1/2" iron pipe and that
 I did establish witness or reference monuments as shown below:

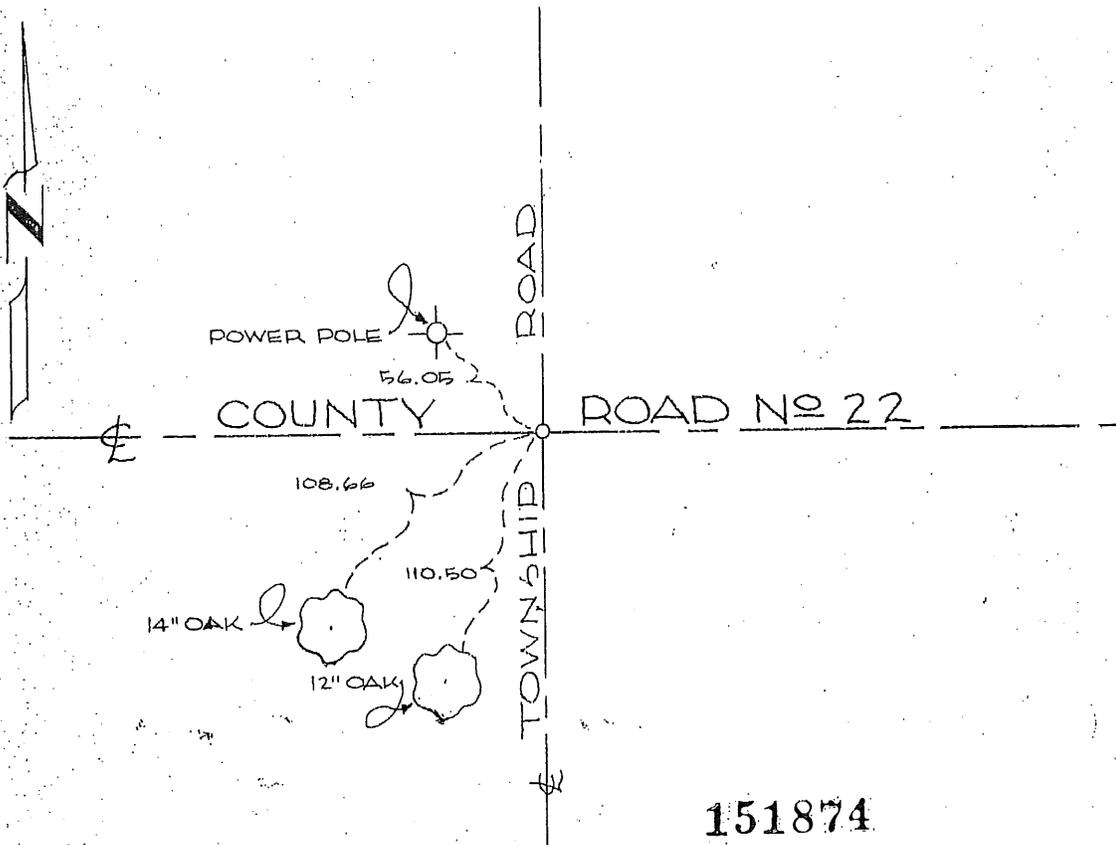

151874

I hereby certify that the above
 is true and correct and that I am
 a registered Land Surveyor under
 the laws of the State of Minnesota.

James J. Miller

Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
 was filed for record in this office on the
26th day of March, 1979
at 10 a.m.

F.A. Johnson
 County Recorder

By _____ Deputy.