

Certified, Filed and or Recorded on
Nov. 04, 2008 AT 12:34PM


Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 19, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10-29-08 found a BROKEN CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

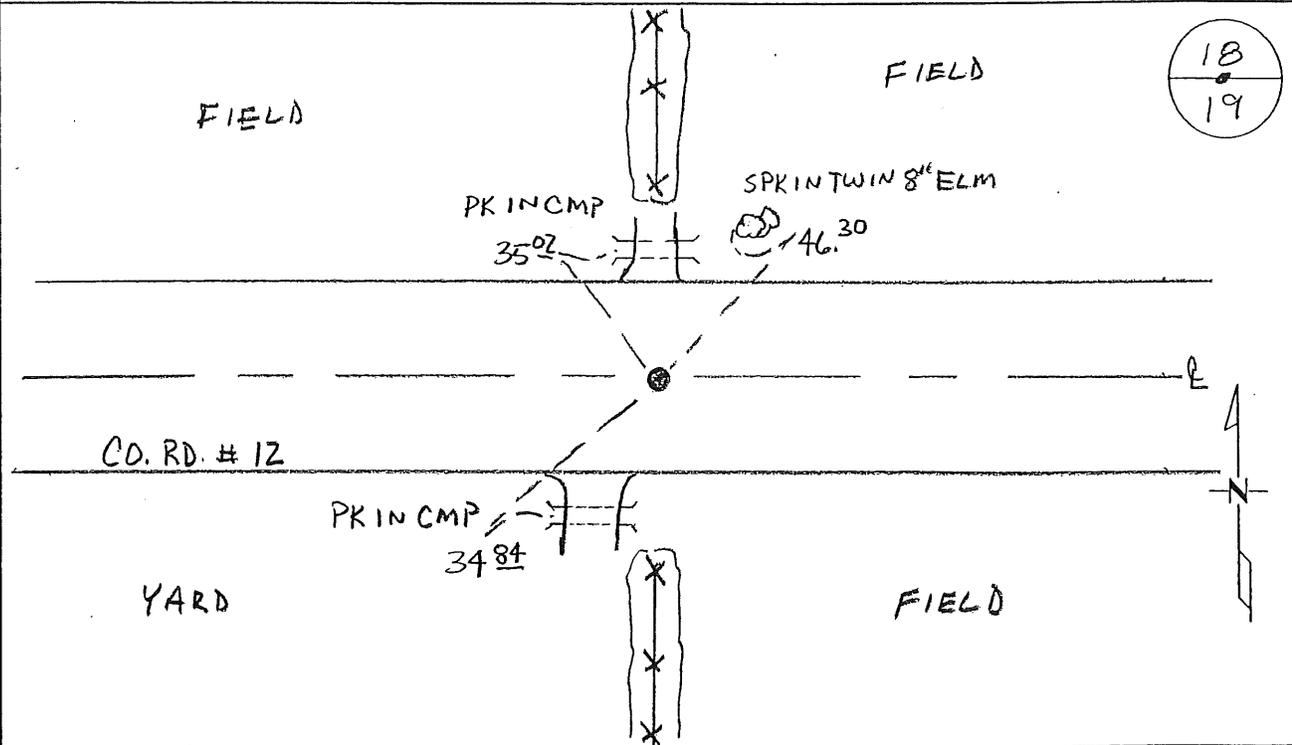

18
19

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:**B191**

North Quarter Corner of Section 19, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at the location and bearing tree was recorded.
- | | | |
|------------|------------|----------|
| 12" Sugar | S 83 W | 25 links |
| 14" W. Oak | S 64 1/2 E | 22 links |
- 1931 County Engineer's notebook No. 65 contains road survey for SAR No. 12 running west to east. No corner is shown, but ¼ line fence north and south is noted with stationing giving distance of 2732.9 feet to the NW corner and 2613.9 feet to the NE corner.
- 1959 County Engineer's Notebook No. 220 contains a road survey for CSAH 12 running west to east on section line. Corner is shown marked by a spike set in center of road with fence lines north and south. Ties.
- | | | |
|--------|----|-------|
| Cor FP | S | 27.2' |
| FP | SE | 54.5' |
- Stationing gives distances of 2734.0 feet to the NW corner and 2614.0 feet to the NE corner being a POT.
- 1990 William Lunser, LS 9394, searched the area and found no evidence of an existing monument. He placed a cast iron monument at the intersection of a fence lines to the North and South of County Road 12 and on a straight line between the section corners. A Certificate of Location (#201527) was recorded. Gives distance to the NW corner of Section 19 as 2733.65 feet and the distance to the NE corner of Section 19 as 2614.91 feet.
- 2001 Westwood Professional Services, Inc. found a broken cast iron monument, down 6 inches, at the intersection centerline of County Road 12 (running east and west) and a fence line running north and south. We left the monument as is and established new reference ties, which agreed with Lunser's.
 County Coordinates Obtained by GPS (Cast Iron Monument)
 NAD 83 (1996 Adjustment)
 N-180419.642
 E-513355.582
- 2008 Westwood Professional Services, Inc. found a broken cast iron monument at the intersection centerline of County Road 12 (running east and west) and a fence lines running north and south. 1990 Lunser distances to the NE and NW corners agree with 1931 and 1959 measurements. CIM is accepted as marking the obliterated position for this corner. Coordinate obtained by GPS coincide with 2001 position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 19, Township 38, Range 29, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 2-22-90 placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

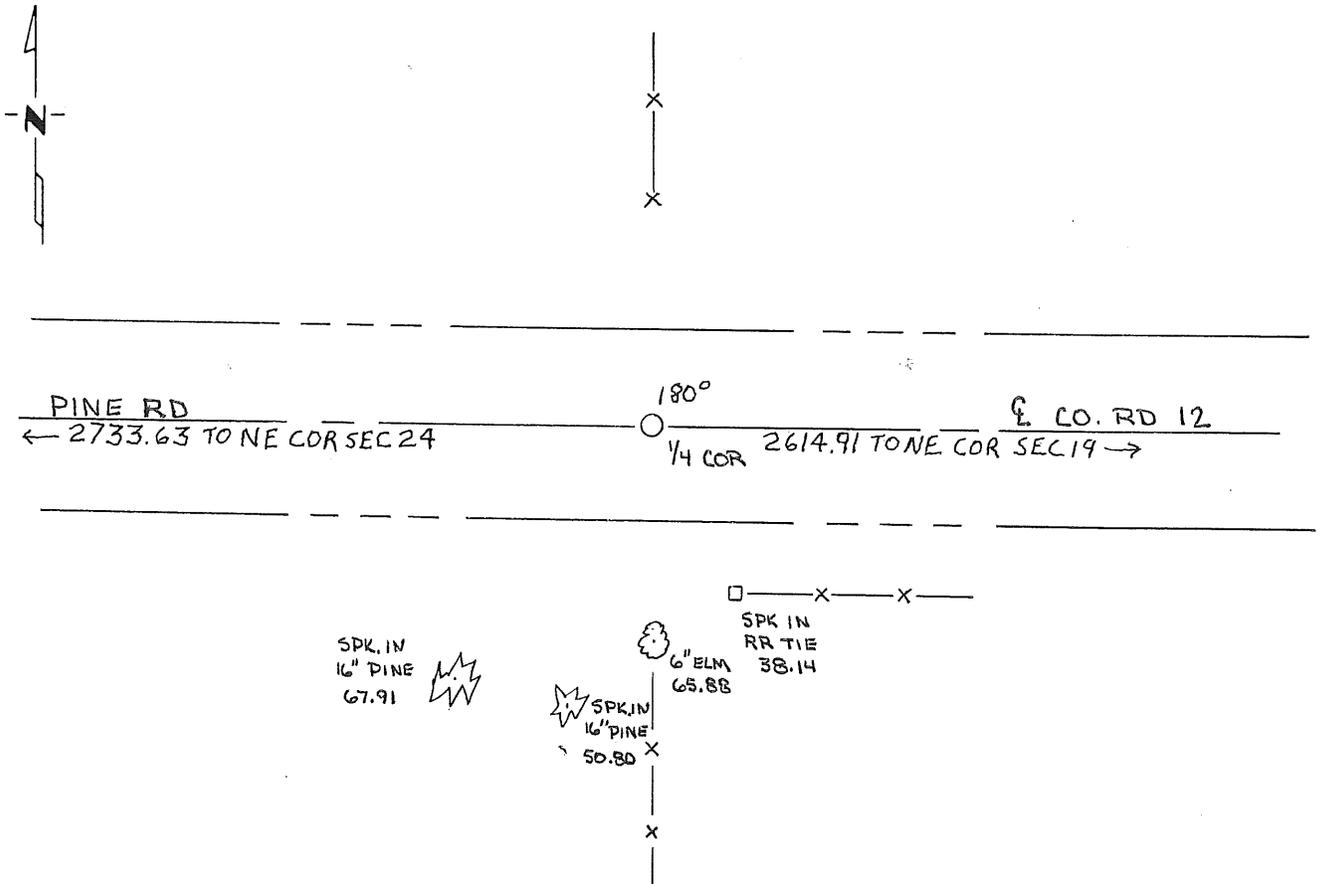

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 2/14/91
SIGNATURE DATE

Registration No. 9394

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

Benton County Records showed no reference to this corner other than U.S. Government Survey.

On 2-22-90 searched the area and found no evidence of an existing monument. Placed a cast iron monument at the intersection of a fence line to the North and South of County Road 12 and on a straight line between the Southwest Quarter and Southeast Quarter.

201527

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MO
CERTIFIED TO BE FILED
AND/OR RECORDED ON

FEB 28 12 24 PM '91

ALICE G. ENGELMEYER
COUNTY RECORDER

BY *[Signature]* DEPUTY