

Office of the County Recorder, BENTON County, Minnesota
I hereby certify that the within instrument was filed for record in this office on the
 day of , 200 .

COUNTY RECORDER _____

By _____ Deputy.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter _____ Corner of Section 20, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 06/28/01 found a nothing
DATE

left monument as found lowered monument removed monument (explain)

On 1/02/02 placed a 1/2"x12" iron pipe capped #10461 at the intersection of the
DATE centerline of County Road 12 and a fence line from the south projected north.

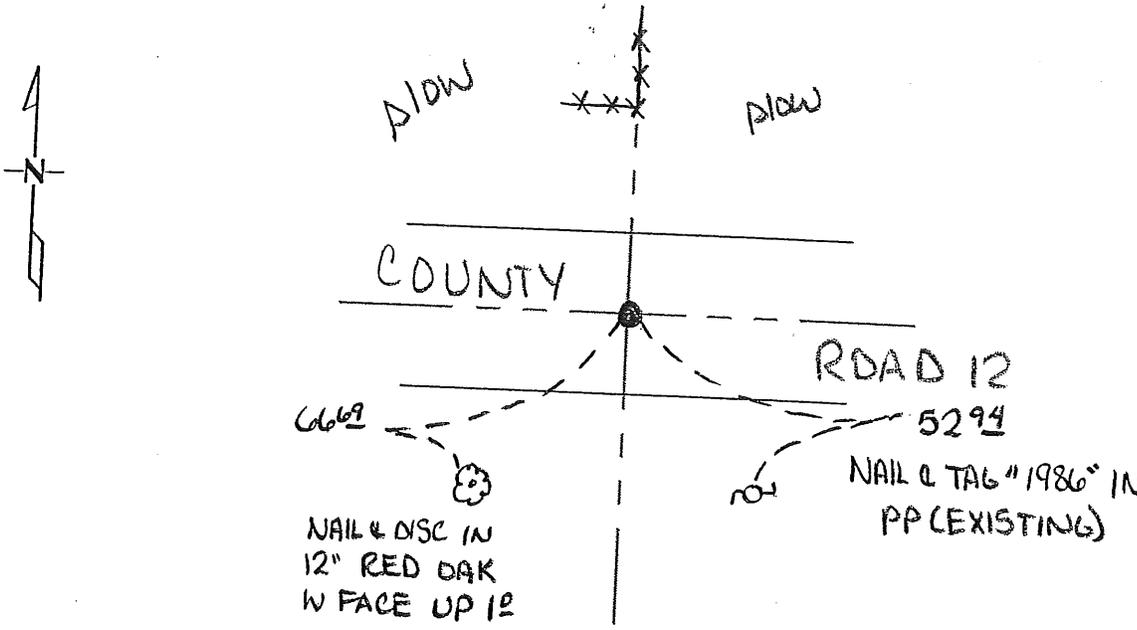

Ref. Job # _____

Ties that are found and in good condition are noted as 'existing'. New tree and power pole ties are to the head of a nail with a brass disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Benny Miller

Date 4/18/02

License No. 10461

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

B201

The North Quarter Corner of Section 20, Township 38th North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

In August of 1855 this corner was established by GLO, Oscar F. Davis set a wood post at this location and bearing trees were recorded.

6" Sugar N 50 E 7 links
12" Sugar S 17 1/2 E 16 links

On June 28, 2001 Westwood Professional Services, Inc. found nothing near the location of the intersection of the centerlines of County Road 12 (running east and west) and weak occupation consisting if a mostly down fence line (running south).

In December 2001 Westwood Professional Services, Inc. located occupation fences along the north-south quarter lines of Sections 17 & 20, T38N, R29W.

On January 2, 2002 Westwood Professional Services, Inc. established the North Quarter Corner of Section 20 at the intersections of the centerline of County Road 12 (running east and west) and fence line from the south projected north. We set a 1/2" X 12" iron pipe capped #10461 at the corner location. This established position falls on line between the NE and the NW corners of Section 20 and 1.59 feet east of the lost position. This is the accepted established point as marking the obliterated corner.

Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-180363.988
E-518630.134

MARILYN J. NOVAK
COUNTY RECORDER
BY Marilyn J. Novak
DEPUTY

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

285644

2002 MAY -7 A 8:29