

Office of the County Recorder, BENTON County, Minnesota  
I hereby certify that the within instrument was filed for record in this office on the  
day of \_\_\_\_\_, 200\_\_.

COUNTY RECORDER

By \_\_\_\_\_ Deputy.

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 21, Township 38, Range 29  
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 12/12/01 found a Broken off Cast Iron Monument  
DATE

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

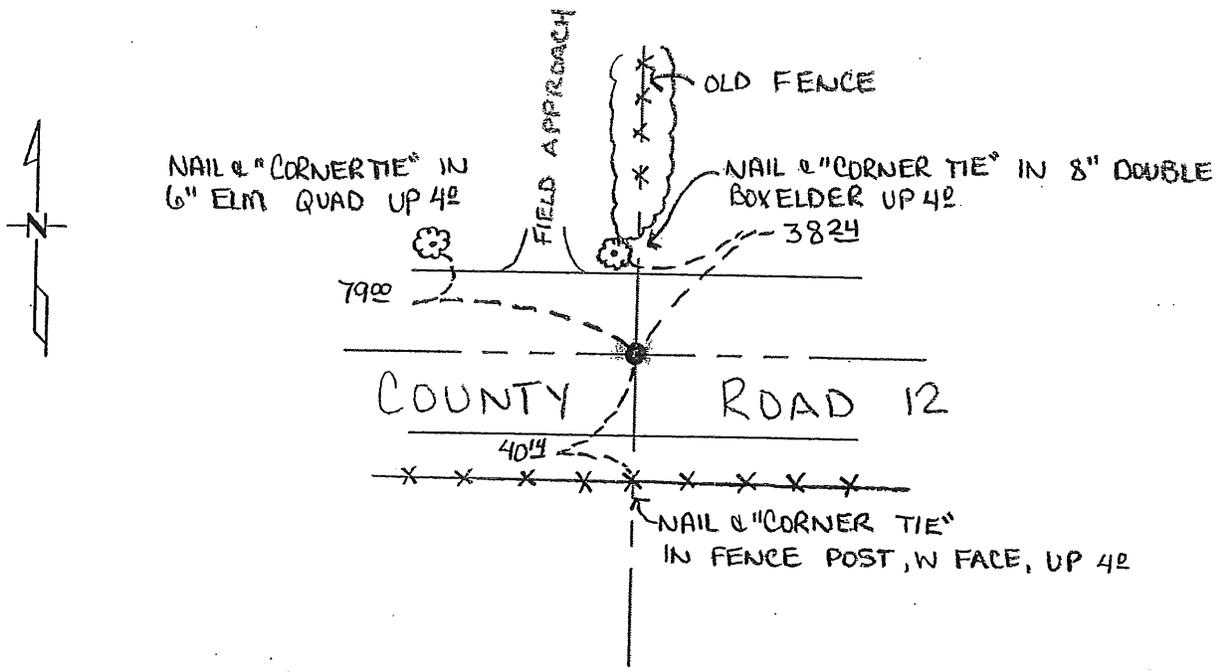

Ties that are found and in good condition are noted as 'existing'. New tree and power pole ties are to the head of a nail with a brass disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature] Date 4/18/02 License No. 10461

Title:     Land Surveyor     Professional Engineer     County Surveyor     County Engineer

Statement of Evidence:

B211

The North Quarter Corner of Section 21, Township 38 North, Range 29 West, Alberta Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

In August of 1855 this corner was established by GLO, Oscar F. Davis set a wood post at this location and bearing trees were recorded.

8" Sugar S 80 E 36 links  
10" Sugar N 70 W 24 links

In 1959, notes call for a hub with the following reference ties.

14" W. Oak NE 53.85'  
12" Elm S? 89.3'

Undated and Unspecific ties exist.

F.P. N 31.7  
F.P. NW 44.7

On June 28, 2001 Westwood Professional Services, Inc. found a cast iron monument at the intersection of the centerlines of County Road 12 (running east and west) and a fence line (running north). No evidence of previously listed ties was found.

On December 12, 2001 Westwood Professional Services, Inc. found a broken off cast iron monument, down 6 inches, at the intersection of the centerlines of County Road 12 (running east and west) and a fence line (running north). We left the monument as is and established new reference ties. The found cast iron monument is 29.49 feet east and 13.49 feet south of the lost position. Corner is considered marking the obliterated position of the corner.

Coordinates Obtained by GPS  
NAD 83 (1996 Adjustment)  
N-180347.823  
E-523929.456

MARILYN J. KOWAL  
COUNTY RECORDER  
BY Marilyn Nowak DEPUTY

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

285646

2002 MAY -7 A 8:30