

Certified, Filed and or Recorded on
Mar. 11, 2009 AT 10:21AM


Signed: [Signature]
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 22, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 11-11-08 found a PK NAIL
- left monument as found lowered monument removed monument (explain)
- On 12-11-08 placed a PK NAIL WITH BENTON COUNTY DISK

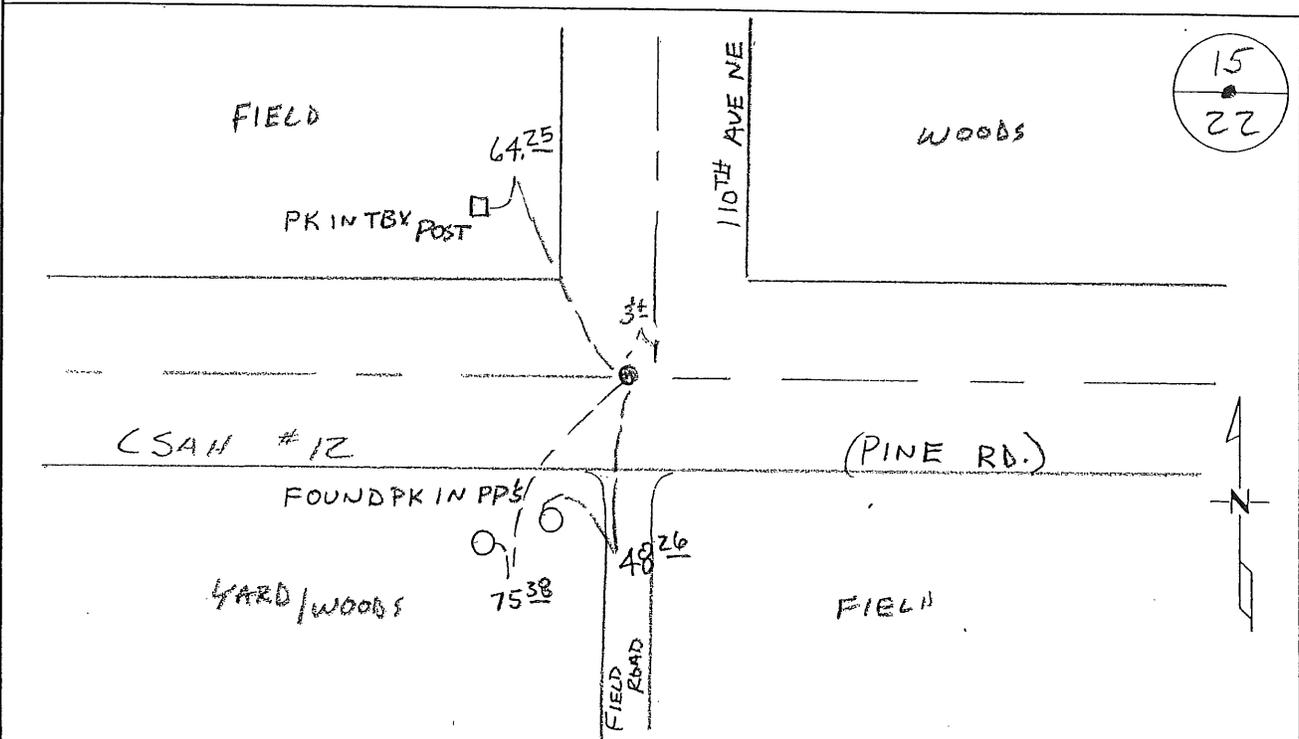

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy County Surveyor
License No. 43932

Date: 3/6/09

Benton County Surveyor's Office
Chris Hoglund, Deputy County Surveyor
Minnesota License No. 43932

Statement of Evidence:**B221**

North Quarter Corner of Section 22, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|------------|--------|----------|
| 14" Linden | S 12 E | 8 links |
| 10" Sugar | N 35 E | 33 links |
- 1931 County Engineer's Notebook No. 65 contains road survey for SAR No. 12 running west to east. Corner is shown as a pipe in 4-way road intersection with stationing giving distance of 2622.0 feet to the NW corner. A PI is located between this corner and the NE corner. Ties:
- | | | |
|-----------|----|-------|
| T.P. | NW | 51.1' |
| 8" R. Oak | SW | 39.8' |
- 1933 County Engineer's Notebook No. 70 contains road survey by H. G. Elletson, which notes corner marked by an iron pipe in road intersection with same ties. Stationing gives distance of 2622.0 feet from the NW corner of Section 22.
- 1966 County Engineer's Notebook No. 252 contains road survey for CSAH No. 12 running west to east. Corner is shown as an iron pipe in 4-way road intersection with stationing giving distance of 2622.0 feet to the NW corner and 2611.4 feet to the NE corner with a delta angle of 0-08' right. Ties:
- | | | |
|------------|--------|--------|
| T.P. | NE | 81.75' |
| PP | SW | 48.05' |
| 16" Elm NE | 70.75' | |
| 18" BassNE | 116.8' | |
- Undated Milner W. Carley notes an iron in place with the following reference ties (which are noted in the Benton County Surveyor's Record Book).
- | | | |
|------------|------|------|
| T.P. | NW | 37.5 |
| P.P. | SW | 37.5 |
| 16" Elm NE | 70.4 | |
- 1988 Bruce Skipton, LS 17768, found a 3/4" X 24" iron rod over a 3/4" X 24" iron rod. He removed both and dug under, but found no other corner evidence. He set a cast iron monument over the lower iron rod and filed a Certificate of Location (#191230).
- 2001 Westwood Professional Services, Inc. found a cast iron monument at the intersection of the centerlines of County Road 12 (running east and west) and 115th Avenue NE (running north and south) and located it using GPS. Measured 2622.04 feet to the NW corner and 2610.94 feet to the NE corner.
County Coordinates Obtained by GPS (Cast Iron Monument)
NAD 83 (1996 Adjustment)
N-180400.286
E-529134.733
- 2008 Westwood Professional Services, Inc. found a PK nail at the intersection of the centerlines of County Road 12 (running east and west) and 115th Avenue NE (running north and south) and located it using GPS. County Coordinates Obtained by GPS to the PK nail coincide with our 2001 position. Field crew also notes that the 1966 tie to the 18" basswood (now dead) fits this position and all of 1988 Skipton ties remain. Position is accepted as marking the obliterated location for this corner. PK nail was removed and replaced with a Benton County disk.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter _____ Corner of Section 22, Township 38N, Range 29W, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 10-4-88 found a 3/4" X 24" rod over 3/4" X 24" rod
DATE

left monument as found, lowered monument, removed monument (explain)

On 10-4-88 placed a cast iron monument
DATE

SKETCH OF REFERENCE TIES

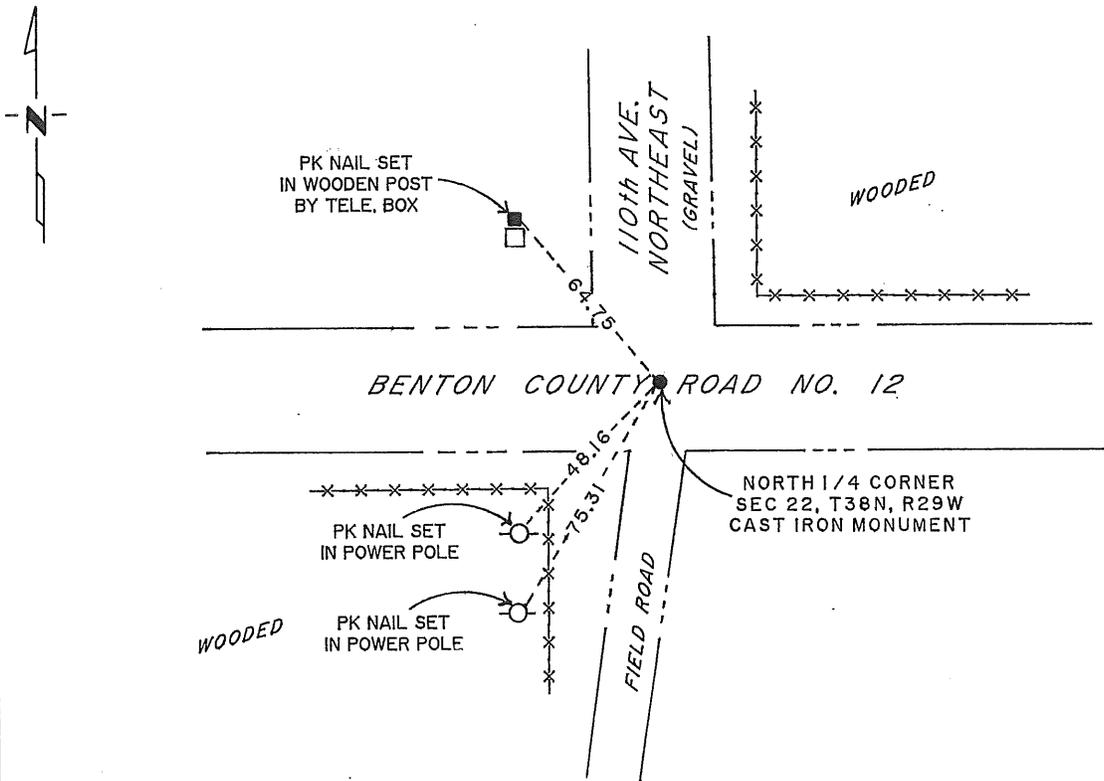

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Shipton 11-22-88
SIGNATURE DATE

Registration No. 17768

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

1. The original survey was accomplished in August 1855 by Oscar F. Davis.
2. The old Benton County surveyor's books indicated that an iron was mark-
the position of said corner with the following reference ties: T.P.
NW 37.5, P.P. SW 37.5 & 16" Elm NE 70.4.
3. Milner W. Carley records indicated that an iron was in place with the
above reference ties.
4. On October 4, 1988, Paul E. Wellen & Assoc. dug with a backhoe below
the 3/4" rods, that were located and found nothing. Set a cast iron
monument over the found rods.

191230

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 11 42 AM '89

ALICE C. ENGELMEYER
COUNTY RECORDER

BY *Alice C. Engelmeier*