

Certified, Filed and or Recorded on
Mar. 11, 2009 AT 10:22AM

Signed: Ju
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 25, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 12/11/08 found a 1/2" IRON PIPE CAP # 12236

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

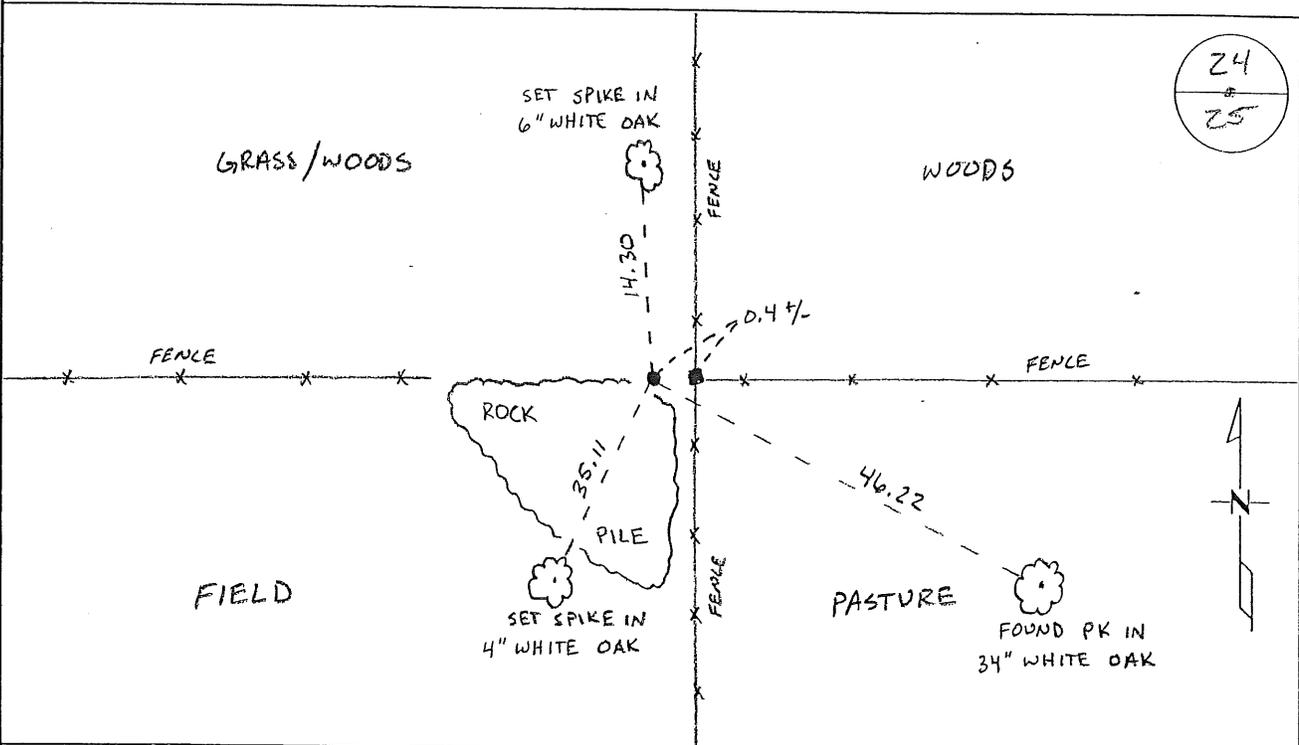

24
+
25



Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Chris Hoglund
Deputy County Surveyor
License No. 43932

Date: 3/6/09

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:**B251**

North Quarter Corner of Section 25, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

7" Tamarack	S 77 E	39 links
10" Tamarack	N 49 E	46 links

1924 County Surveyor's Record Book 2, page 284, and Record Book A, Map No. 46, shows a survey subdividing Section 24. Corner is shown as an iron set at the midpoint of the south line with a distance of 5284.80 feet between section corners.

2008 Westwood Professional Services, Inc. found a ½" iron pipe capped 12236 at the intersection of fences north/south/east/west. Position is 16.79 feet north of a straight line between section corners but fits within 5 feet of a lost position east and west. Searched at true lost position and nothing was found. Measured 2638.84 feet to the NW corner and 2648.33 feet to the NE corner of Section 25. Fence lines are longstanding evidence of section line location and ½" iron pipe is accepted as marking the obliterated position.

Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-175060.233
 E-539653.701