

Certified, Filed and or Recorded on
Nov. 04, 2008 AT 12:16PM

Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 32, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-23-08 found a CAST IRON MONUMENT

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

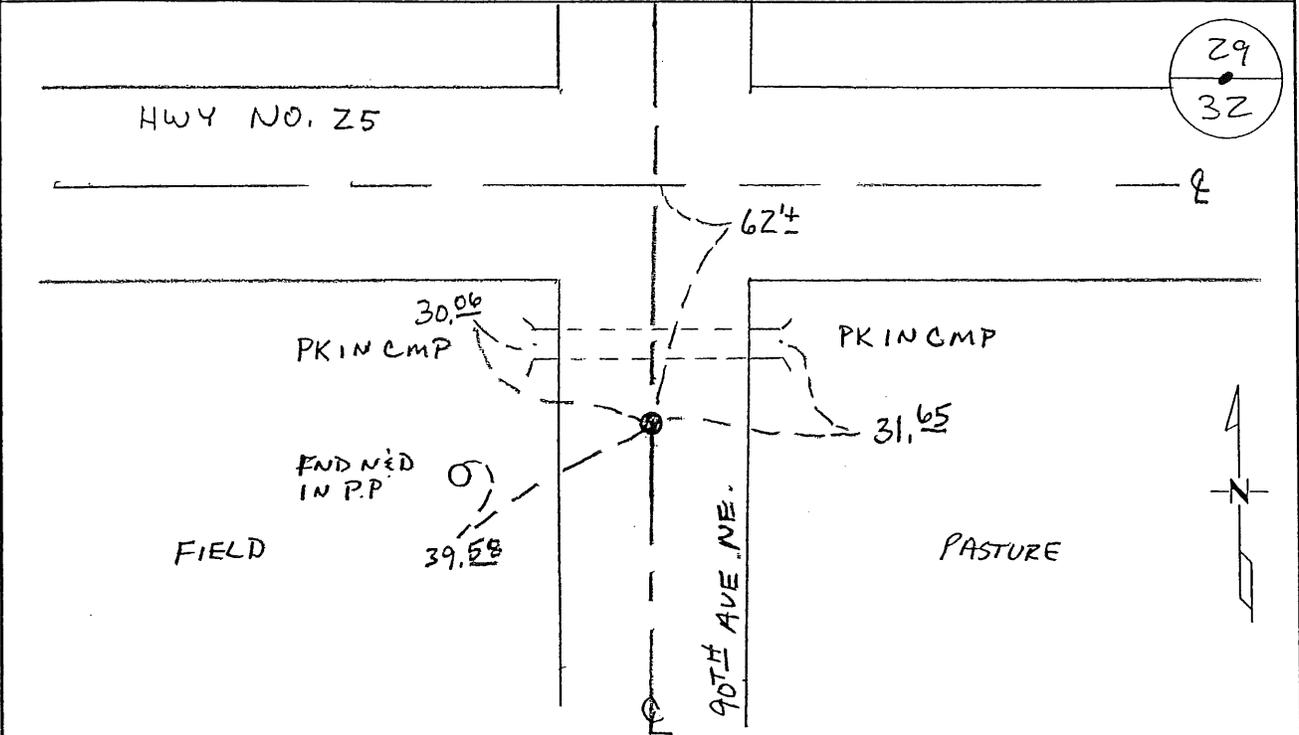

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:**B321**

North Quarter Corner of Section 32, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

10" Sugar S 42 E 21 links

15" Sugar N 69 E 34 links

Undated Roll F-1, of MN/DOT road alignment records for TH 25, File No. 12-80, note the corner position is assumed to be at the intersection of centerlines of existing roads that is 62.0 feet south of the new road centerline.

1981 Paul Wellen, LS 10461, found a 1" pipe and verified its location using a highway map. He replaced it with a cast iron monument and filed a Certificate of Location (#160209). He measured 2631.59 feet to the NW corner and 2604.56 feet to the NE corner of Section 32.


2003 Westwood Professional Services, Inc. found CIM
 County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 169602.668
 E- 518882.035

2003 Westwood Professional Services, Inc. found CIM ~62 feet south of the centerline of Hwy 25. One 1981 Wellen tie remained and fit well. Measured 2631.60 feet the NW corner and 2604.51 feet to the NE corner of Section 32 which agrees with 1981 Wellen measurements. CIM is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2003 position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 21st day of July, 1981
I did _____ find _____ the north quarter corner of Section 32,
Twp. 38N, Rg. 29W, Benton County, Minnesota, which
was evidenced by 1 inch iron pipe. Varified location from State Highway
right-of-way map

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of a Benton County Cast Iron Monument and that
I did establish witness or reference monuments as shown below:

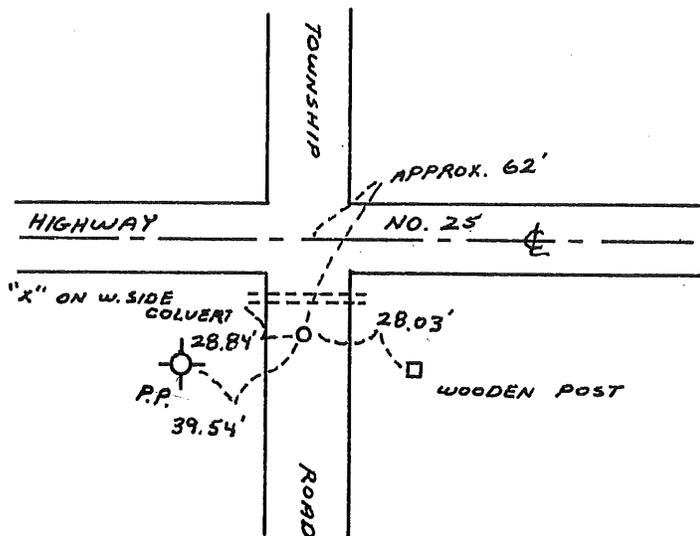

160209

I hereby certify that the above
is true and correct and that I am
a registered Land Surveyor under
the laws of the State of Minnesota.

Jay J. Allen
Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
was filed for record in this office on the
10th day of September, 1981 at 2 P.M.

F. J. Johnson
County Recorder

By _____ Deputy.