

Certified, Filed and or Recorded on
Mar. 11, 2009 AT 10:22AM


Signed: [Signature]
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 33, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 12/11/08 found a 1/2" IRON PIPE CAP # 12236
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

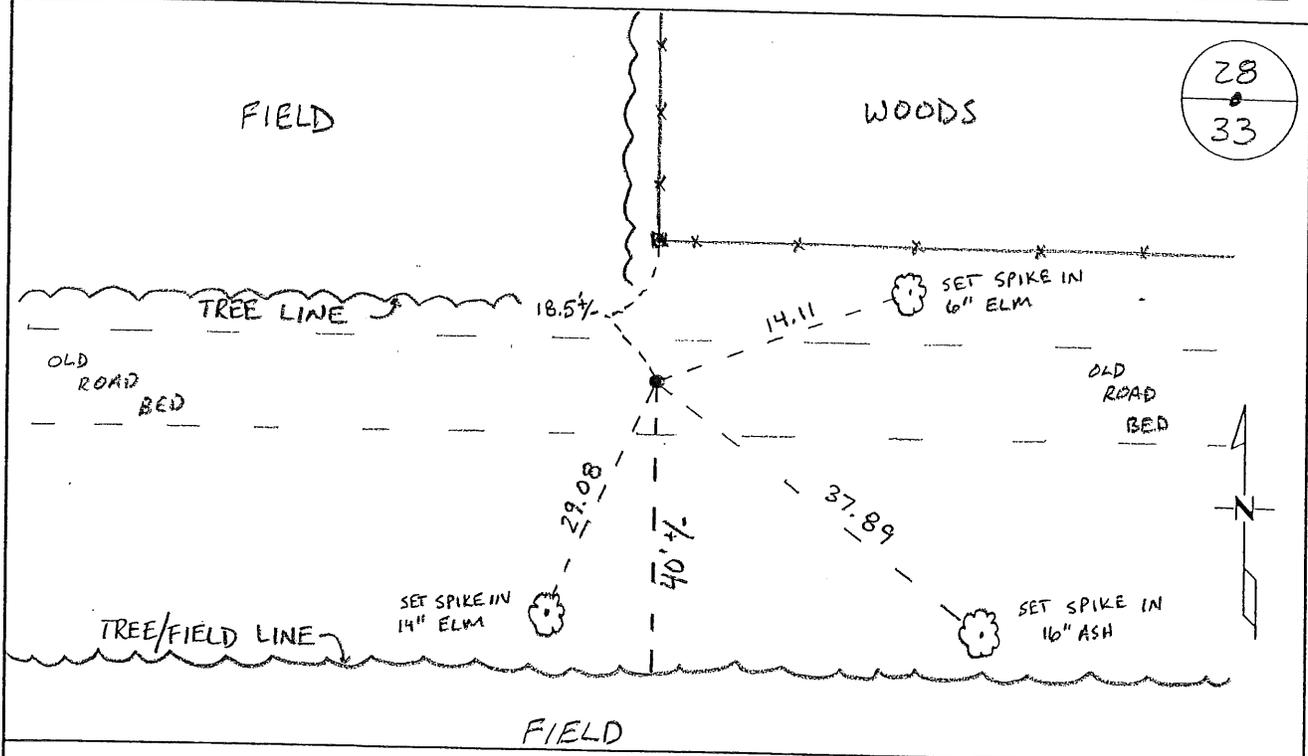

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy County Surveyor
License No. 43932

Date: 3/6/09

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:**B331**

North Quarter Corner of Section 33, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|-------------|----------|----------|
| 12" Blk Ash | S 19 ½ E | 75 links |
| 12" Blk Ash | N 44 ½ W | 34 links |
- 1902 County Surveyor's Record Book A, Map No. 36, and County Surveyor's Record Book 2, page 302, shows a survey of Section 33 by John Whilt. Corner is shown as a post 39.38 chains (2599.08 feet) from the NW corner Sec 33 and 39.12 chains (2581.92 feet) from the NE corner Sec 33.
- 1983 David Regan, LS 12236, set a ½" I.P. on a fence line north/west and centerline of an old roadbed east. He filed a Certificate of Location (#166043).
- 2003 Received survey information from Regan concerning Section 33. County Coordinates computed from Regan information, which gives a distance of 2603.53 feet to the NW corner and 2587.28 feet to the NE corner of Section 33. NAD 83 (1996 Adjustment)
 N- 169707.633
 E- 524088.982
- 2008 Westwood Professional Services, Inc. found a ½" iron pipe capped 12236 in the centerline of an old road bed with fence lines north and south. Measured 2603.70 feet to the NW corner and 2587.12 feet to the NE corner of Section 33 which is in agreement with 1983 Regan position. Location is 0.30 feet of proportioned distance of 1902 measurements. ½" iron pipe is accepted as marking the obliterated position for this corner.
 County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-169707.657
 E-524089.148

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 33, Township 38, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

■ On 6/27/83 placed a 1/2 inch capped iron pipe on fence line north
DATE and west and on center line of old road bed east

SKETCH OF REFERENCE TIES

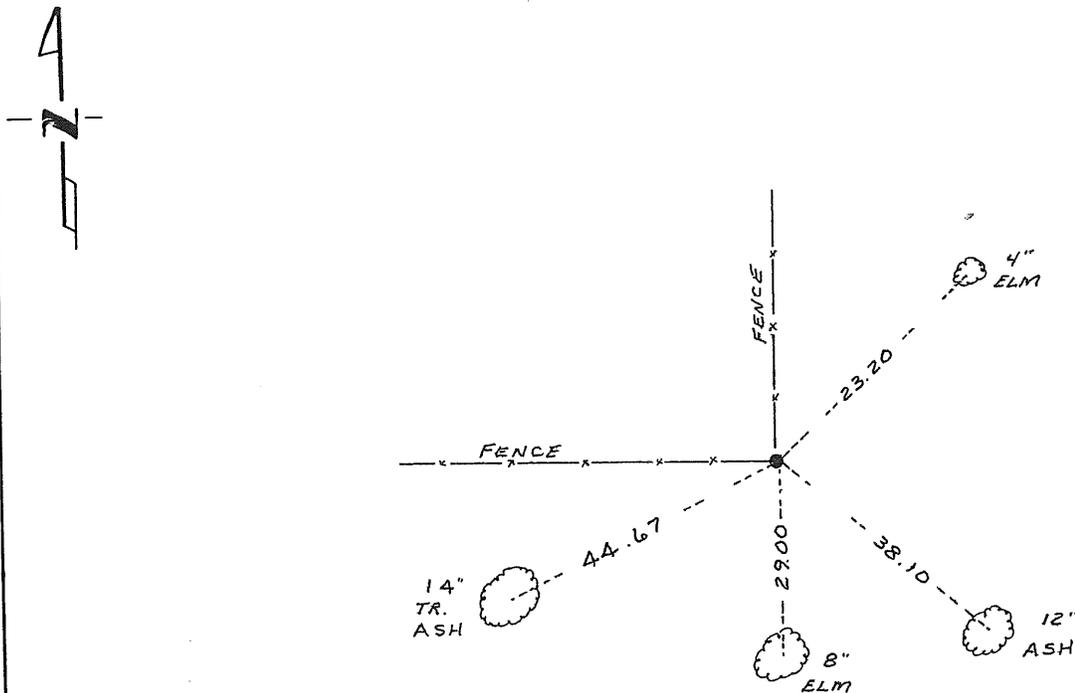

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David G. Regan 7/14/83
SIGNATURE DATE

Registration No. 12736

■ Land Surveyor, Professional Engineer

County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A.M. on the 25 day of July A.D., 1983

Co. Recorder
Register of Deeds File Johnson

By _____, Deputy

DOCUMENT NO. 166043