

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHQUARTER Corner of Section 35, Township 38, Range 29, _____ P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 4-27-93 found a 1/2" SOLID IRON
DATE MONUMENT

left monument as found, lowered monument, removed monument (explain)

On 6-17-93 placed a STANDARD CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

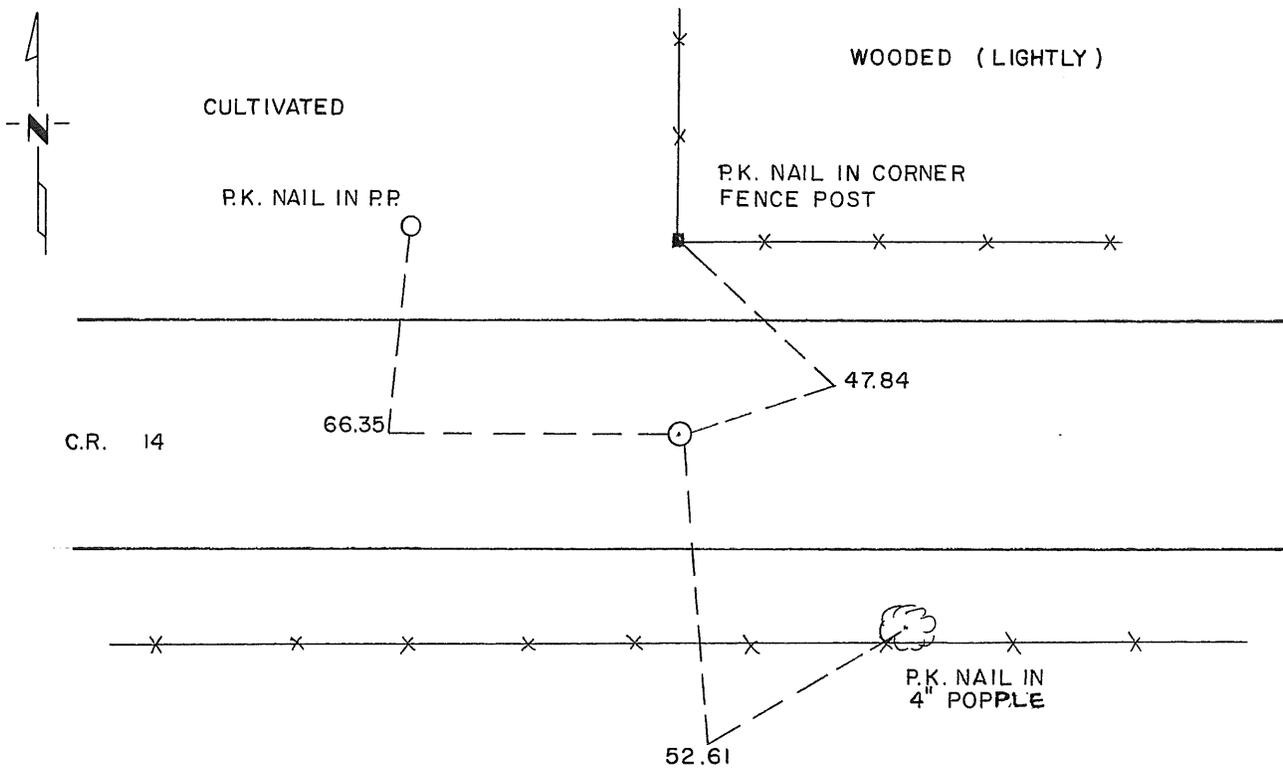

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sidney P. Williamson 5/24/94
SIGNATURE DATE

Registration No. 10918

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 ____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

1. Original Government Survey was performed in 1855.
2. Benton County Survey Records indicate an iron in 1963.
3. In 1963, the Highway Department measured 2630.7 to the northwest corner and 2667.1 to the northeast corner.
4. On April 27, 1993, Williamson-Kotsmith, Inc. found a ½ inch solid iron it measures 2631.38 from the northwest corner and 2667.90 feet to the northeast corner.
5. On June 17th, 1993 Williamson-Kotsmith, Inc removed iron and set a Standard Cast Iron Monument at the same location.

223489

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JUN 17 1 10 PM '94

ALICE G. EBERHART
COUNTY RECORDER

BY *Jed* DEPUTY