

7-13

A 375357

Certified, Filed and or Recorded on
July 13, 2010 AT 04:13PM


Signed: CK
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 13, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 07/09/10 found a 1/2" REBAR
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____

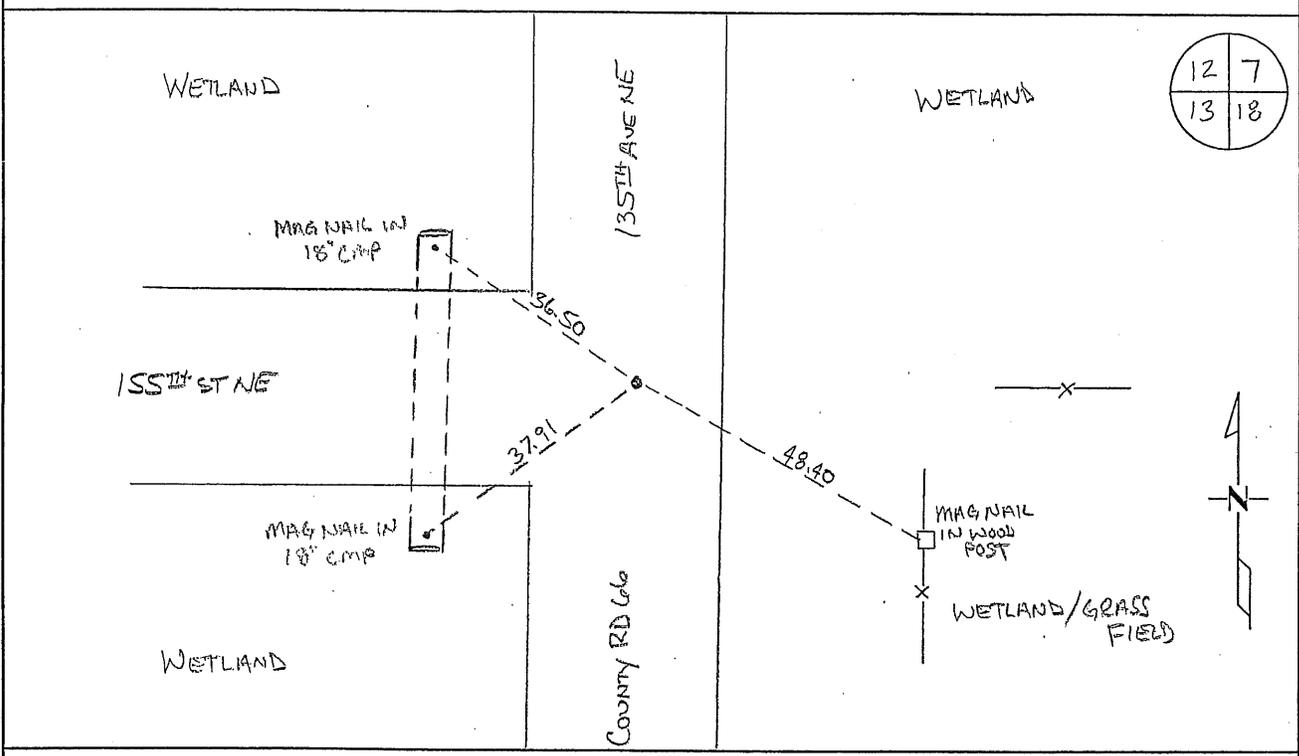

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 7/12/2010

HWY Dept

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:**B133**

East Quarter Corner of Section 13, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey established corner marked with a wood post and bearing trees noted as:

14" Elm	S 27 E	11 links
12" Sugar	N 55 W	7 links

Line trees were noted as a 12" Blk Oak South 22.73 chains and a 8" Tamarack North 24.00 chains.

1936 County Engineer's Notebook No. 101 shows survey for road running south to north. Notes show corner marked by a spike with fence lines east and west. Ties:

FP	E	35.5
FP	NE	49.5

Stationing gives distances of 2646.1 feet to the SE corner and 2657.5 feet to the NE corner. Corner is shown as a POT.

1984 Paul Wellen, LS 10461, set a cast iron monument at the centerline of a road north/south and a tree line east. He filed a Certificate of Location (#173401).


2010 The Benton County Surveyor's Office found a 1/2" rebar 2 feet west of the north-south centerline of County Road 66, fitting the distances north and south proportionally with the 1936 distances. The rebar is accepted as marking the obliterated corner position, GPS coordinates were obtained and reference ties were established.

Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-182915.159
 E-542171.312

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 4 day of JUNE, 19 84
 I did SET 0 the NORTH EAST corner of Section 13,
 Twp. 38, Rg. 29, BENTON County, Minnesota, which
 was evidenced by 2" solid iron 1.5' DEEP

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of CAST IRON MONUMENT and that
 I did establish witness or reference monuments as shown below:

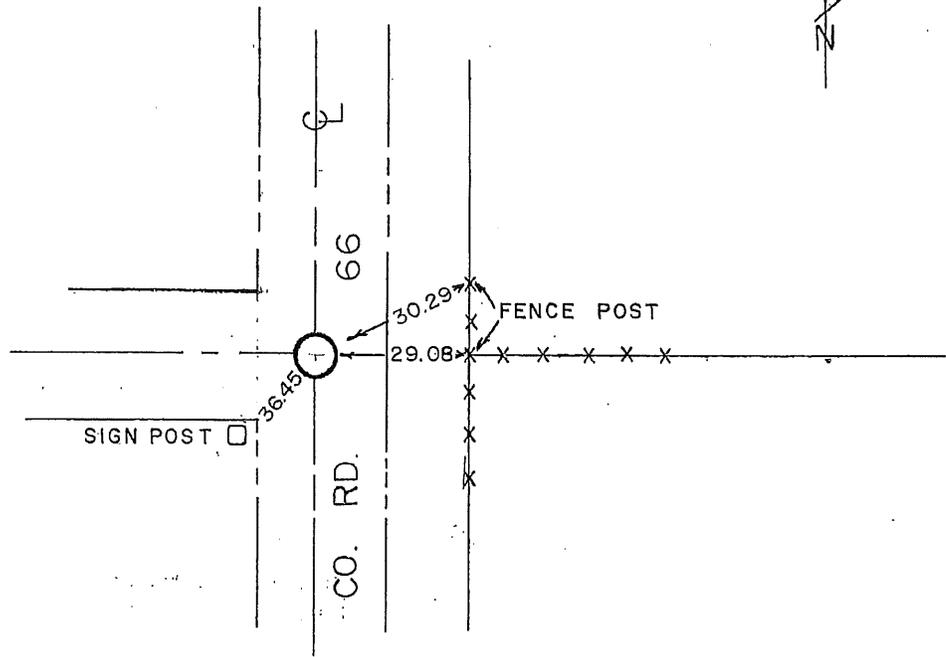

173400

I hereby certify that the above
 is true and correct and that I am
 a registered Land Surveyor under
 the laws of the State of Minnesota.

Doug Miller
 Surveyor

Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
 was filed for record in this office on the
16 day of May, 19 85
 at 11:00 A.M.

Alice C. Engelmeier
 County Recorder

By AO Deputy.

Handwritten notes:
 10-38-28
 7-38-28
 11-2-85
 13-2-85