


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH EAST Corner of Section 18, Township 38, Range 29  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 11-17-08 found a CAST IRON MONUMENT

left monument as found       lowered monument       removed monument (explain)  
 On \_\_\_\_\_ placed an \_\_\_\_\_

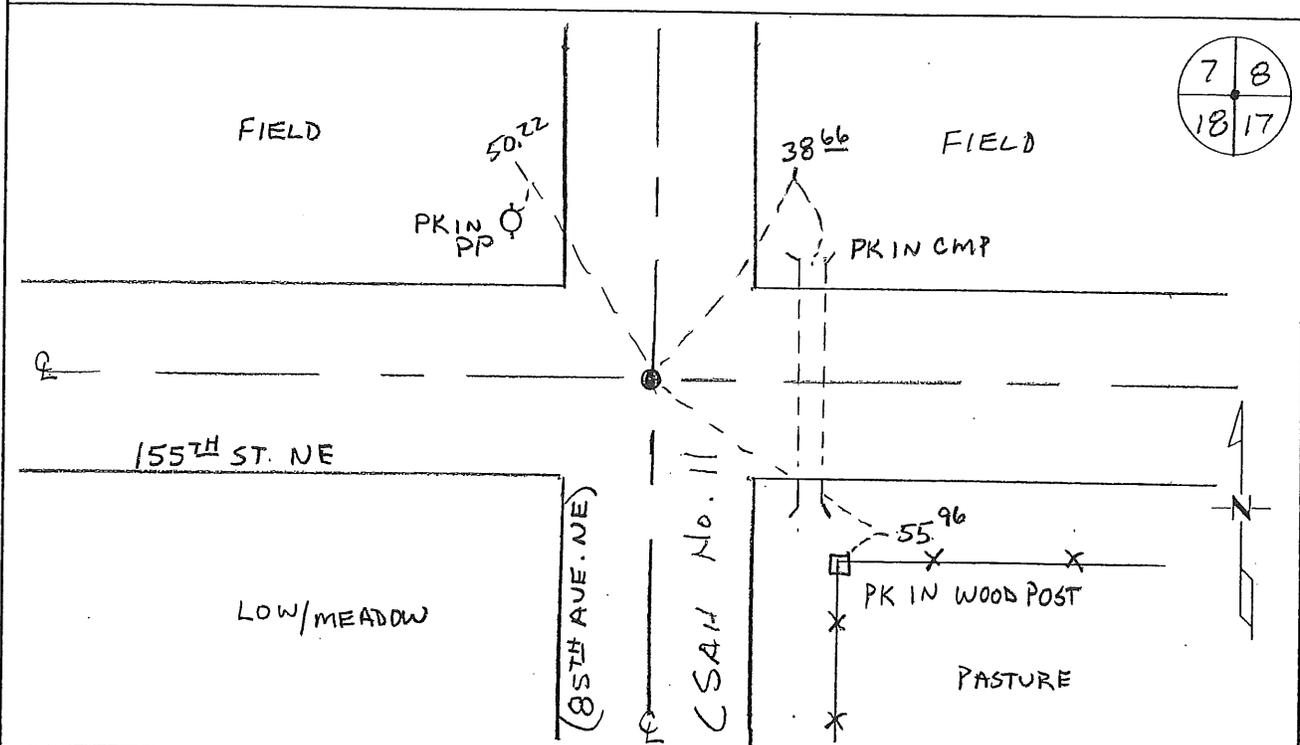

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 12/17/08

**Statement of Evidence:**

B182

Northeast Corner of Section 18, Township 38 North, Range 29 West, Alberta Township,  
4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at the location and bearing tree was recorded.
- |           |          |          |
|-----------|----------|----------|
| 22" Sugar | S 46 W   | 18 links |
| 13" Elm   | S 36 ½ E | 26 links |
- 1930 County Engineer's notebook No. 79 lists ties to 2 stakes:
- |                 |    |       |
|-----------------|----|-------|
| 24" Oak         | SE | 78.2' |
| N. End C.M.Pipe | NE | 9.4'  |
- 1935 County Engineer's Notebook No. 93 contains survey for Road running from south to north. Notes corner as a hub with town road west and east. Ties:
- |              |    |      |
|--------------|----|------|
| 24" Oak      | SE | 78.2 |
| N. End Culv. | NE | 9.4  |
- 1963 County Surveyor's Record Book 2, page 272, (also noted in Notebook No. 93) notes found hub and placed iron over. Ties to 2 stakes and an iron:
- |             |    |       |
|-------------|----|-------|
| 24" Oak     | SE | 78.75 |
| PP          | NW | 50.85 |
| N End Culv. | NE | 28.05 |
- (Also noted in 1967)
- 1964 County Engineer's Notebook No. 246 contains survey for CSAH 11 running south to north on section line. Notes show corner marked by an iron in center of road with town road west and east. Ties are the same as above in 1963.
- 1990 William Lunser, LS 9394, found a ½" iron pin down 1 foot in road intersection and set a cast iron monument over the pin. He filed a Certificate of Location (#201528) and notes a distance of 2614.73 feet to the North ¼ corner Sec 18 and a distance of 2732.01 feet to the East ¼ corner Sec 18. Ties to PP and Oak fit close to 1963 ties.
- 2001 Westwood Professional Services, Inc. found a PK at centerline/centerline. Dug up the PK and found a cast iron monument.  
County Coordinates Obtained by GPS (CIM)  
NAD 83 (1996 Adjustment)  
N-185833.208  
E-515825.359
- 2008 Westwood Professional Services, Inc. found a CIM at the intersection of the centerlines of CSAH No. 11 and 155<sup>th</sup> St. NE. Field crew found oak stump fitting 1930 and 1963 ties. Measured 2614.84 feet to the N1/4 and 2732.10 feet to the E1/4 of Section 18 which agrees with 1990 Lunser distances. CIM is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2001 position.



# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 18, Township 38, Range 29, 4th P.M.

STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On 2-22-90 found a 1/2" PIN 1 FOOT DOWN  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 2-22-90 placed a CAST IRON MONUMENT ON TOP OF 1/2" PIN  
DATE

### SKETCH OF REFERENCE TIES

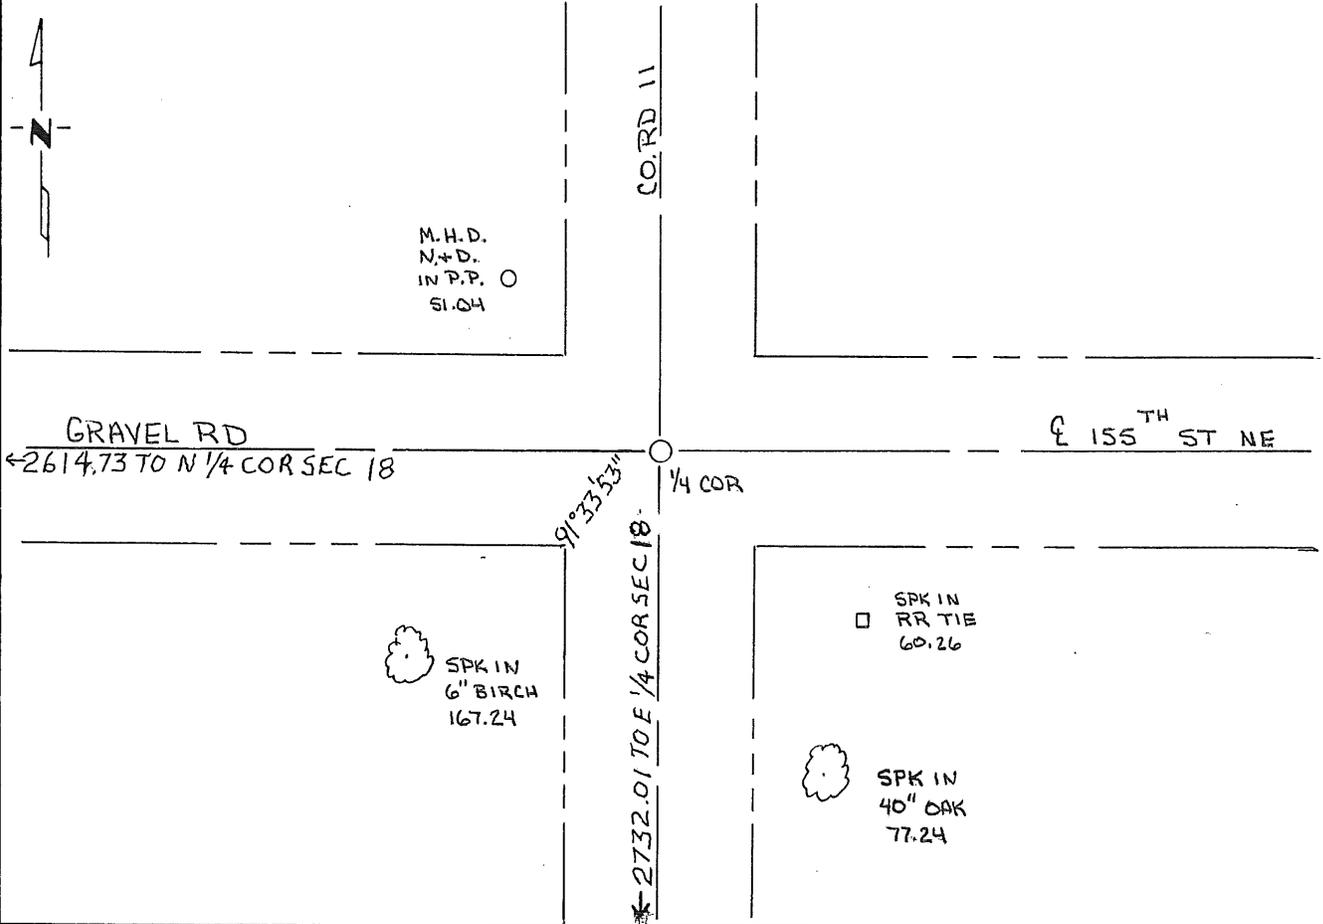

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. L... 2/14/91  
SIGNATURE DATE

- Registration No. 9394
- Land Surveyor,  Professional Engineer
  - County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_  
By \_\_\_\_\_, Deputy  
DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

Benton County Records showed no reference to this corner other than U.S. Government Survey.

On 2-22-90 searched the area and found a  $\frac{1}{2}$ " rod one foot down. Placed a cast iron monument on top of this rod.

201528

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

FEB 28 12 24 PM '91

ALICE O. ENGELMEYER  
COUNTY RECORDER

BY     *je*     DEPUTY