

Office of the County Recorder, BENTON County, Minnesota
I hereby certify that the within instrument was filed for record in this office on the
_____ day of _____, 200____.

COUNTY RECORDER


By _____ Deputy.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 20, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

- On 06/28/01 found a nothing
DATE
- left monument as found lowered monument removed monument (explain)
- On 01/03/02 placed a 1/2" X 12" iron pipe capped #10461 at the intersection
DATE
of the centerlines of County Road 12 and 95th Avenue NE

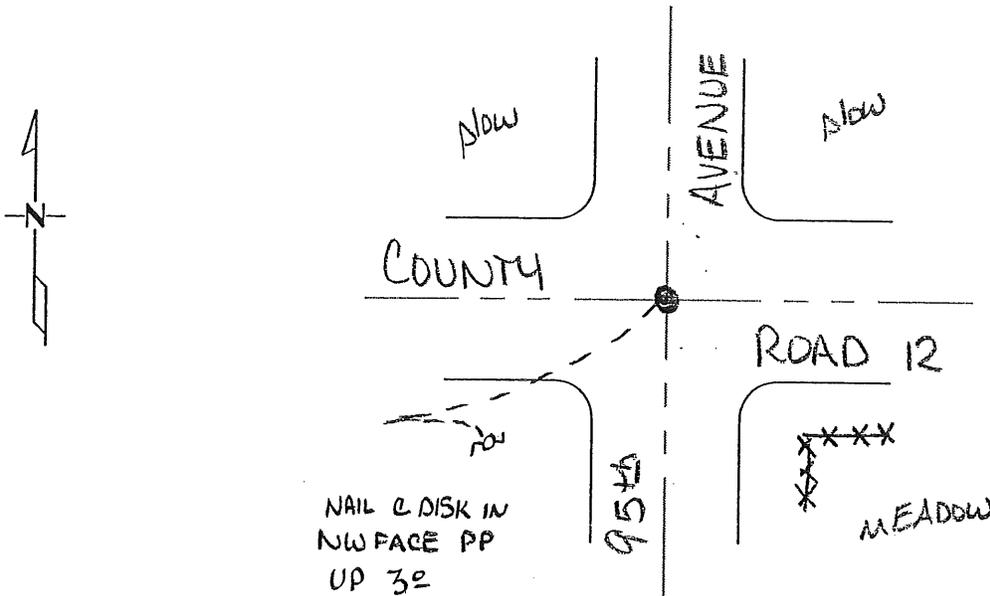

Ref. Job #

Ties that are found and in good condition are noted as 'existing'.
New ties are to the head of a nail with a disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]

Date 4/19/02

License No. 1046

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

B202

The Northeast Corner of Section 20, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

In 1855 this corner was established by GLO, a wood post was set at this location and bearing trees were recorded.

12" Aspen S 61 E 28 links
12" Maple N 78 W 12 links

On January 4, 1915 J.P. Soderstrum, County Surveyor surveyed the line between Sections 17 & 16, T38N, R29W. His records (a map noted as No. 14 and field notes) note the distance between the NE 17 and the E 17 is 41.18 chains (2717.88 feet) and the distance between the E 17 and the SE 17 is 42.90 (2831.40 feet).

The County Surveyors records in Book 2, page 270 & 271 note that J.P. Soderstrum notes a monument was located at the intersection of roads and testimony. He dug in the area but found nothing.

In 1959 a spike is noted at this location with the following reference ties.

Guy Pole NW 49.8
T.P. NE 49.15

On January 3, 2001 Westwood Professional Services, Inc. found no evidence of previous ties or a monument at the intersection of the centerlines of County Road 12 (running east and west) and 95th Avenue NE (running north and south). We dug down 6", but found nothing. We set a PK at the centerline intersection. We did find nails at the NE and E corners of Section 23 and the distance between the NE 17 and the E 17 is 2712.92 feet and the distance between the E 17 and the PK we set is 2829.00 feet. We replaced the PK with a 1/2" X 12" iron pipe capped #10461 and established reference ties.

Coordinates Obtained by GPS
NAD 83, 1996 Adjusted
N-180348.365
E-521286.968

MARILYN J. KOVAK
COUNTY RECORDER
BY Marilyn J. Kovak DEPUTY

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MI
CERTIFIED TO BE FILED
AND/OR RECORDED

285645

8:29
2002 MAY -7 A 8