

Office of the County Recorder, BENTON County, Minnesota  
I hereby certify that the within instrument was filed for record in this office on the  
       day of       , 200      .

COUNTY RECORDER


By \_\_\_\_\_ Deputy.

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 21, Township 38, Range 29  
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

- On 09/01 found a 1/2' Rebar Flush  
DATE
- left monument as found     lowered monument     removed monument (explain)
- On 12/19/01 placed a Cast Iron Monument  
DATE

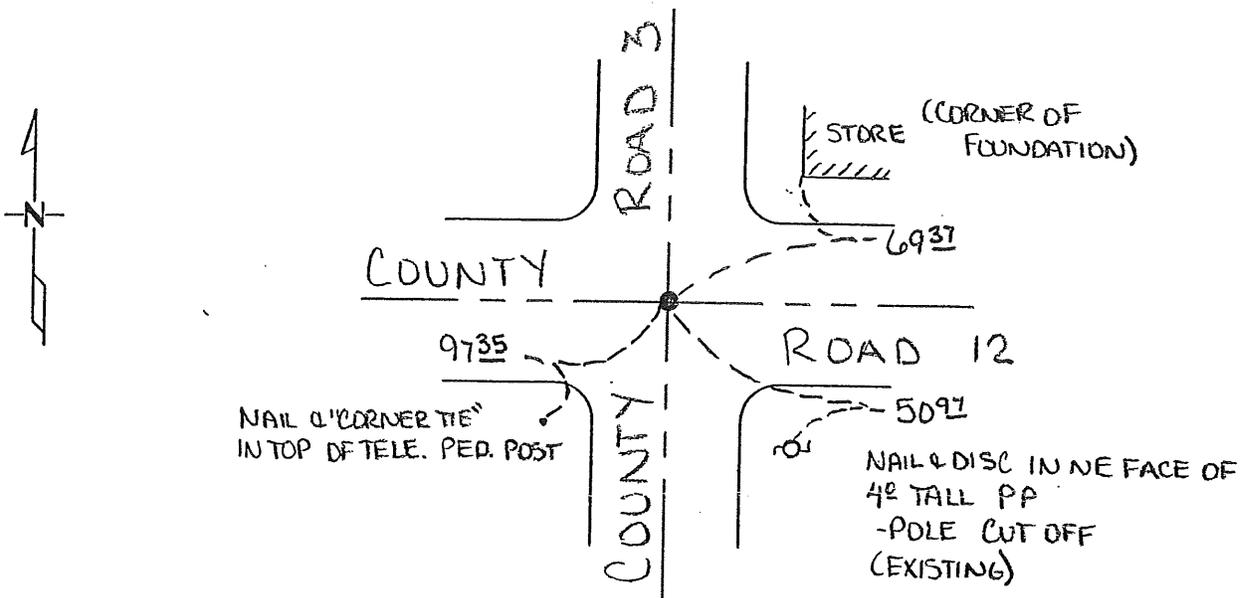

Ties that are found and in good condition are noted as 'existing'.  
New ties are to the head of a nail with a disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature] Date 4/18/02 License No. 10461

Title:  Land Surveyor     Professional Engineer     County Surveyor     County Engineer

Statement of Evidence:

B212

The Northeast Corner of Section 21, Township 38 North, Range 29 West, Alberta Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

In August of 1855 this corner was established by GLO, Oscar F. Davis set a wood post at this location and bearing trees were recorded.

12" W. Birch	N 42 W	13 links
28" Bur Oak	S 29 W	21 links

In 1959, notes called for a hub with the following reference ties.

SW Corner of Store Foundation	NE 69.3'
SE Corner of Store Foundation	NW 126.3'

Milner W. Carley indicated in 1959 a hub was in place with the same above reference ties.

On October 4, 1988, Bruce Skipton found a spike. Dug with a backhoe below the spike and found a 1" X 2" hub near where natural ground would be. A cast iron monument was set over the hub. A Certificate of Location (#191229) was recorded.

On December 6, 1989 William Lunser notes on Doc. No. 195963 that the distance to the E 1/4 corner of Section 21 is 2668.74 feet.

In September, 2001 Westwood Professional Services, Inc. found a rebar flush at the intersection of the centerlines of County Road 3 (running north and south) and County Road 12 (running east and west). Benton County Highway Department workers stated that Benton County had placed a rebar at the location of the cast iron monument, after it was lost due to construction, using the existing reference ties.

On December 19, 2001 Westwood Professional Services, Inc. removed the rebar and placed a cast iron monument at the location. Position checked with existing ties and new reference ties were established.

Coordinates Obtained by GPS  
NAD 83 (1996 Adjustment)  
N-180373.964  
E-526512.828

MARILYN J. NOVAK  
COUNTY RECORDER  
BY Marilyn J. Novak DEPUTY

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

285647

2002 MAY -7 A 8:31

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast \_\_\_\_\_ Corner of Section 21, Township 38N, Range 29W, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 10-4-88 found a spike flush with bituminous surface with a 1" x 2" hub <sup>DATE</sup> 1.5' below, match old reference ties.
  - left monument as found,  lowered monument,  removed monument (explain)
- On 10-4-88 placed a cast iron monument <sub>DATE</sub>

### SKETCH OF REFERENCE TIES

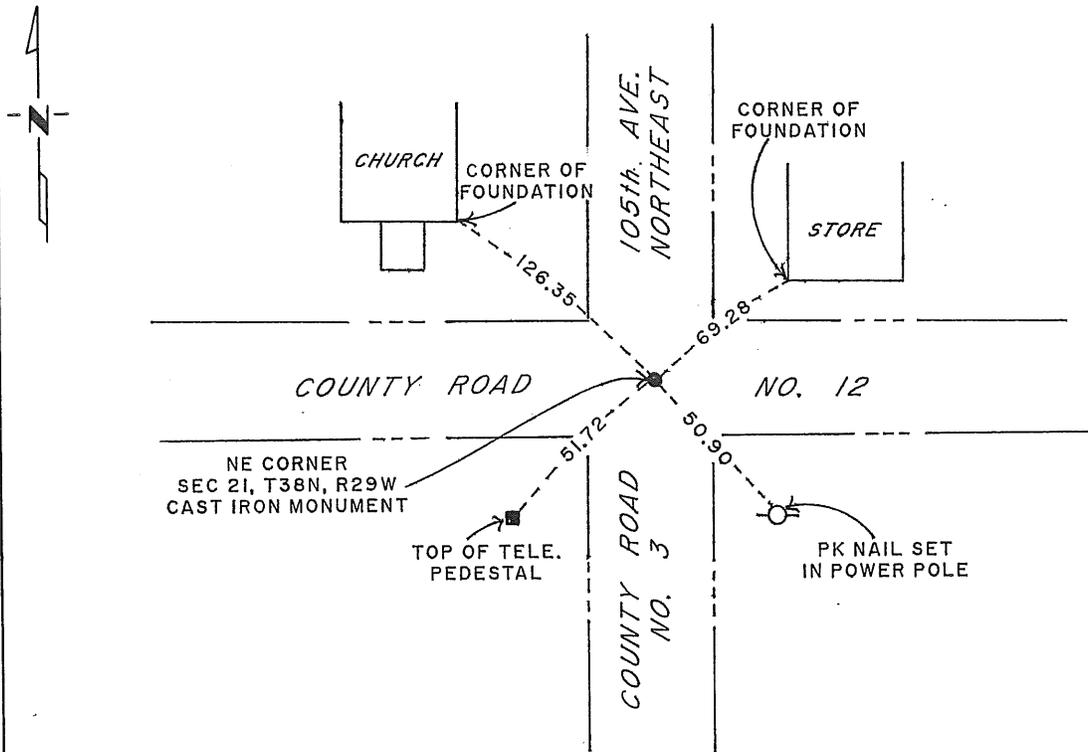

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Skipton  
SIGNATURE

11-22-88  
DATE

Registration No. 17768

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

1. The original survey was accomplished in August 1855 by Oscar F. Davis.
2. The old Benton County Surveyor's books indicated that a hub was in place with reference ties as follows: SW corner stone foundation NE 69.3 & SE corner of church NW 126.3.
3. Milner W. Carley indicated in 1959 a hub was in place with the same above reference ties.
4. On October 4, 1988, Paul E. Wellen & Assoc. dug with a backhoe below the spike found at the surface and found a 1" X 2" hub near where natural ground would be. Set cast iron monument over hub.

191229

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND FOR RETURNED ON

JAN 12 11 42 AM '89

ALICE R. ENGELMEYER  
COUNTY RECORDER

BY *Alice C. Engelmeier*