

Certified, Filed and or Recorded on  
Dec. 24, 2008 AT 08:57AM

Signed: BW  
MARILYN J NOVAK ~~EVI~~  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 31, Township 38, Range 29  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-23-08 found a CAST IRON MONUMENT

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

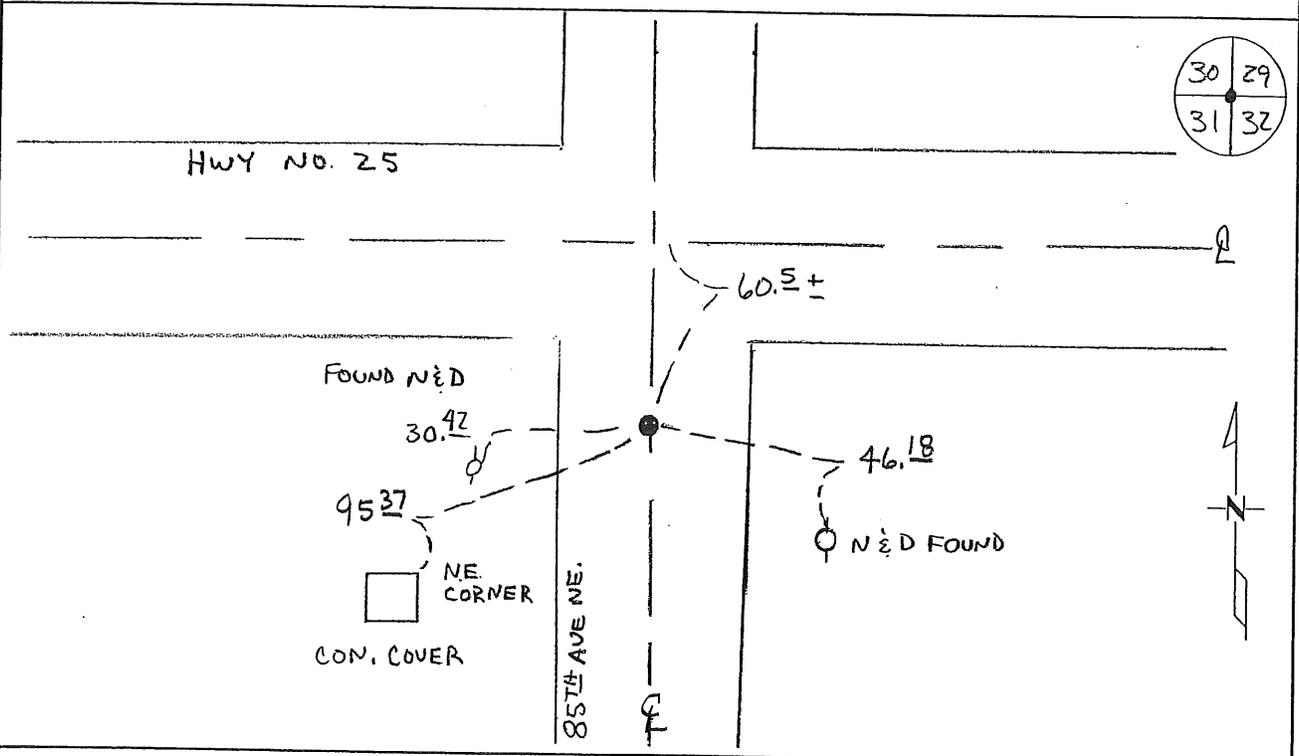

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 12/17/08

Benton County Surveyor's Office  
Chris Hogle, Deputy County Surveyor  
Minnesota License No. 43932

**Statement of Evidence:****B312**


Northeast Corner of Section 31, Township 38 North, Range 29 West, Alberta Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- |              |        |          |
|--------------|--------|----------|
| 12" W. Birch | S 72 E | 19 links |
| 24" Sugar    | N 42 W | 21 links |
- 1915 County Engineer's Notebook 7, pages 13 and 14, contains road survey by M.J. Cleveland. Notes show stone monument at the corner being 5286 feet east of the NW corner.
- 1916 County Surveyor's Record Book 2, pages 234, 296, and 297 show a survey by J.P. Soderstrum to settle dispute of line between Sections 29 and 30. At this corner he found a large stone with an "X" in center of road north that was buried by Mr. Rabra some 40 years prior. He notes the following reference ties.
- |                           |    |      |
|---------------------------|----|------|
| Billboard Post            | SE | 38.2 |
| Cor FP                    | NE | 39.5 |
| Cor Found Jakeville Store |    | 47.8 |
- Later ties:
- |           |    |      |
|-----------|----|------|
| Road Post | NW | 58   |
| Cor Fen   | SW | 60   |
| Cor Fen   | SE | 59.7 |
- 1927 County Engineer's Notebook No. 80 contains a road survey for State Road No. 218 by H. G. Elletson. Survey ran from west to east. Notes show corner ties:
- |                           |    |      |
|---------------------------|----|------|
| Billboard Post            | SE | 38.2 |
| Cor FP                    | NE | 39.5 |
| Cor Found Jakeville Store |    | 47.8 |
- 1935 County Engineer's Notebook No. 93 contains survey for Road running north from this corner. Notes corner as a flat rock with + in center TH 218. Same ties as listed in County Surveyor's Record Book 2, page 234, which notes a Granite monument at the corner:
- |              |    |      |
|--------------|----|------|
| H.L. Pole    | SE | 46.7 |
| NE Cor Store | SW | 53.0 |
- 1940's Roll F-1, of MN/DOT road alignment records, File No. 12-80, note a rock monument in place at the corner location that is in centerline of road intersection. Corner is 62.2 feet south of new centerline at station 538+14.5.
- 1964 County Engineer's Notebook No. 246 contains survey for CSAH 11 running south to north on section line. Notes show corner marked by an iron pipe in center of road 62 feet south of the center of TH 25. Ties:
- |                       |    |       |
|-----------------------|----|-------|
| PP                    | SW | 30.65 |
| TP                    | SE | 45.85 |
| "+" Apron Collar      | NW | 70.9  |
| "+" Concrete Platform | SW | 79.6  |
- 1981 Paul Wellen, LS 10461, found a 1/2" re-rod per location as shown on Highway Maps, 62 feet south of centerline. He replaced it with a cast iron monument and filed a Certificate of Location (#160218). Notes show he measured 2631.59 feet to the North 1/4 corner of Section 32. Tie given to NE corner of Jakeville store: 52.60 feet.
- 2008 Westwood Professional Services, Inc. found CIM in the centerline of 85<sup>th</sup> Ave. NE and fitting 1981 Wellen ties. CIM is accepted as marking the obliterated position for this corner  
County Coordinates Obtained by GPS  
NAD 83 (1996 Adjustment)  
N- 169599.256  
E- 516250.441

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 22nd day of July, 19 81  
I did find the northeast corner of Section 31,  
Twp. 38N, Rg. 29W, Benton County, Minnesota, which  
was evidenced by 1/2 inch re-rod as per location from State Highway  
right-of-way map.

I further certify that in order to perpetuate said corner I did  
at the exact location thereof place a permanent marker consisting  
of a Benton County Cast Iron Monument and that  
I did establish witness or reference monuments as shown below:

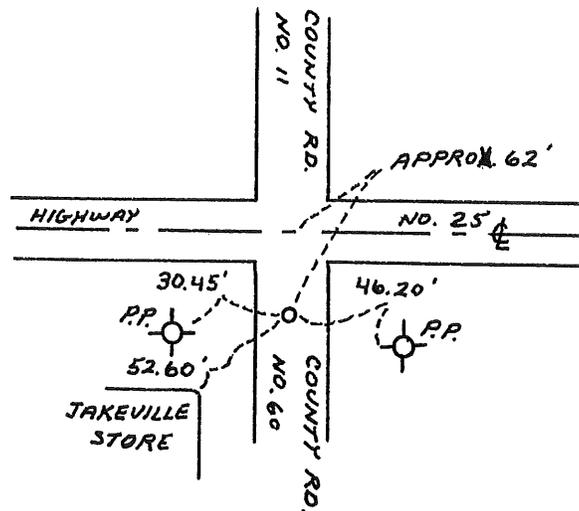

160218

I hereby certify that the above  
is true and correct and that I am  
a registered Land Surveyor under  
the laws of the State of Minnesota.

David J. Allen  
Minn. Registration No. 10461

Office of the County Recorder,  
Benton County, Minn.

I hereby certify that the within instrument  
was filed for record in this office on the  
10th day of September, 1981 at 2 P.M.

J. A. Johnson  
County Recorder

By \_\_\_\_\_ Deputy.