

Certified, Filed and or Recorded on
July 27, 2010 AT 11:42AM


Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 36, Township 38, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 07/13/10 found a CAST IRON MONUMENT DOWN 0.6 FT FROM ROAD SURFACE
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

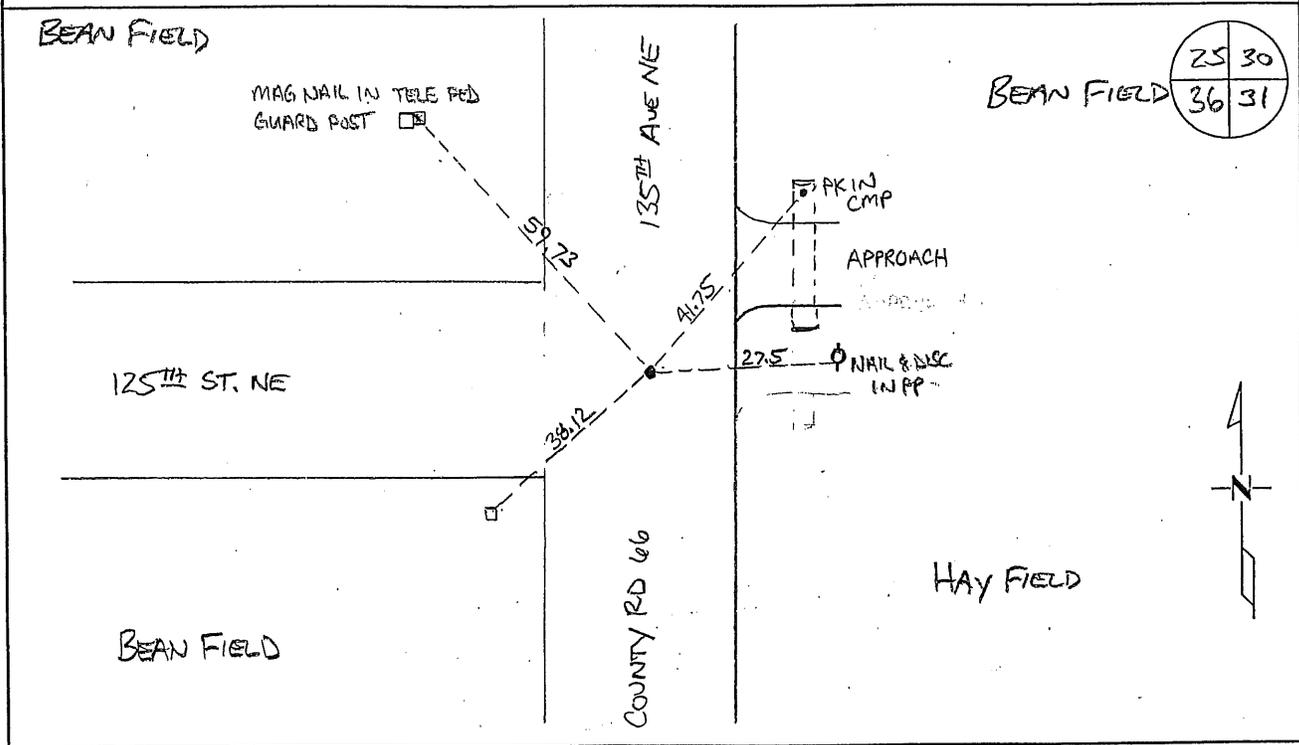

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 7/26/2010

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:**B362**

Northeast Corner of Section 36, Township 38 North, Range 29 West, Alberta Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

8" W. Birch	S 68 E	2 links
10" W. Birch	S 10 W	8 links
8" B. Oak	N 20 W	13 links
6" B. Ash	N 54 E	32 links

Line trees were noted as a 18" Baswood South 9.80 chains and a 10" Basswood North 21.67 chains.

1912 County Surveyor's Record Book 2, page 306 lists ties to a post in center of grade:
 T.P. NW 29'

1912 County Engineer's Notebook No. 2, pages 49 and 50, contains a road survey for SR No. 14 by M. J. Cleveland. Survey runs north-south on section line. Notes show stake in center of road at the corner. Ties:

TP N 29 W
 Fence corner west and fence corner east

1936 County Engineer's Notebook No. 101 shows survey for road running south to north. Notes show corner marked by a hub with town road west and fence east. Ties:

Hub	E	35.8'	Hub	NW	35.0'
Hub	SW	34.1'			

2001 Westwood Professional Services, Inc. found a PK at the intersection of centerlines of County Road 66 (running north and south) and 125th Street NE (running west) and set a cast iron monument at the location of the PK and established reference ties.

2004 County Coordinates Obtained by GPS to CIM:
 NAD 83 (1996 Adjustment)
 N- 169697.794
 E- 542398.420

2006 The Benton County Surveyor's Office found a CIM in the north-south centerline of County Road 66 on the extension of the centerline of 125th Street NE to the west. The CIM fits the 1936 resurvey distance south within a foot and north within approximately 2 feet. Since the CIM falls in the centerline of the north-south road and also fits the distances from 1936, it is accepted as marking the obliterated corner position.

2010 The Benton County Surveyor's Office found the CIM, verified the 2004 coordinates and established new reference ties as shown.