

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST 1/4 Corner of Section 8, Township 38 N, Range 31 W, 4TH P.M.
STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 8/22/90 found a 1 inch SOLID PIN (1.0 FEET BELOW SURFACE)
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

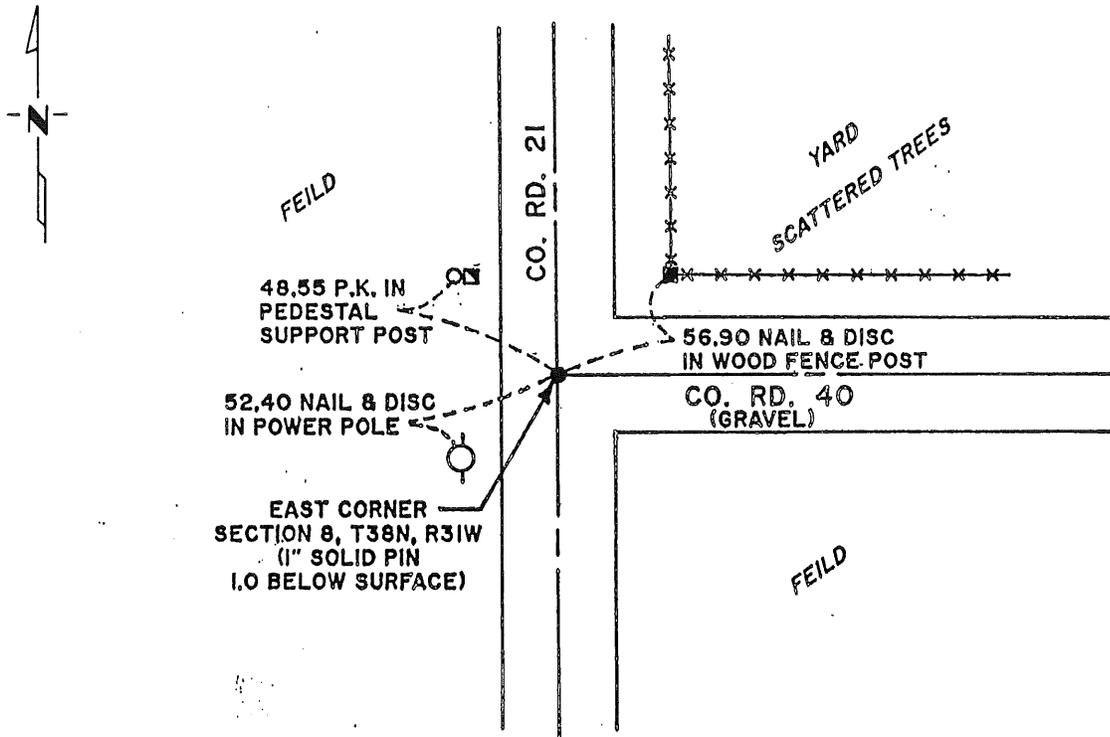

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul Miller 11/24/91
SIGNATURE DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

EAST QUARTER CORNER, SECTION 8, T38N, R31W, of the 4TH PRINCIPAL MERIDIAN

1. During the G.L.O. Survey of 1852, Mr. Edward James Jr., a U.S. Deputy Surveyor, set a wood post to mark this corner.
2. The Benton County Surveyor records indicate that in 1967, J. Kotsmith, Benton County Surveyor, set a iron at this location with three (3) reference ties.
3. On August 22, 1990, Paul E. Wellen & Associates, Inc., found a 1 inch solid iron pin in the center line intersection of Benton County Road 21 and Benton County Road 40. We accepted said iron pin as the one set by Mr. Kotsmith and left it as found and made new reference ties as indicated.

201474

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

FEB 25 8 22 AM '91

ALICE C. ENGELMEYER
COUNTY RECORDER

BY *Jan* DEPUTY