

Certified, Filed and or Recorded on
Sep. 23, 2008 AT 01:31PM


Signed: BW
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E/4 COR Corner of Section 14, Township 38, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8-7-08 found a CAST IRON MON.
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

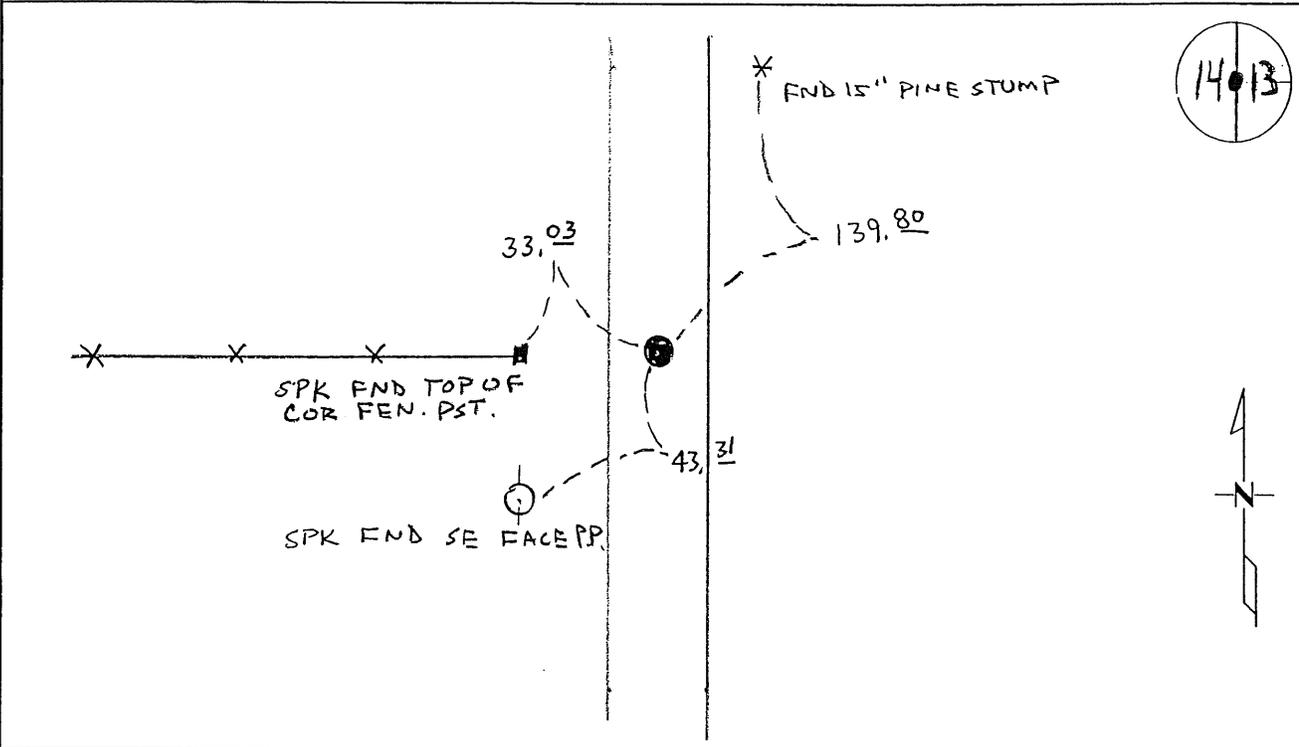

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 8/29/08

Statement of Evidence:

D143

East Quarter Corner of Section 14, Township 38 North, Range 31 West, East Langola Township, 4th Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office survey set a wood post in a mound with a pit 8 links east at the corner location.

1873 County Surveyor's Record Book 2, page 79, shows a road survey on section line running north-south by C. Feller.

1999 On March 24, 1999 William Lunser, LS 9394, set a cast iron monument at the centerline of a fence line west and a road centerline north/south. He filed a Certificate of Location (#262727) and noted a distance of 2656.84 feet to the NE corner Sec 14 and 2674.69 feet to the SE corner Sec 14.

2004 Surveying & Engineering Professionals, Inc. found CIM and used for survey in Section 14. Measured 2647.50 feet to the SE corner.

2008 Westwood Professional Services found CIM at the intersection of the centerline of north/south road and fence to the west. The centerline of the township road and fence line are longstanding evidence of the section line location. CIM fits 1999 Lunser distances to the NE and SE corners of Section 14. Accepted CIM as marking the obliterated position.


County Coordinates obtained by GPS
NAD 83 (1996 Adjustment)
N- 182939.961
E- 473456.953

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER corner of Section 14, Township 38, Range 31, 4th P.M.
Benton County, Minnesota.

On Mar 24, 1999, A Benton Co, Cast Iron Monument (C.I.M.) was placed at this location.

SKETCH OF REFERENCE TIES

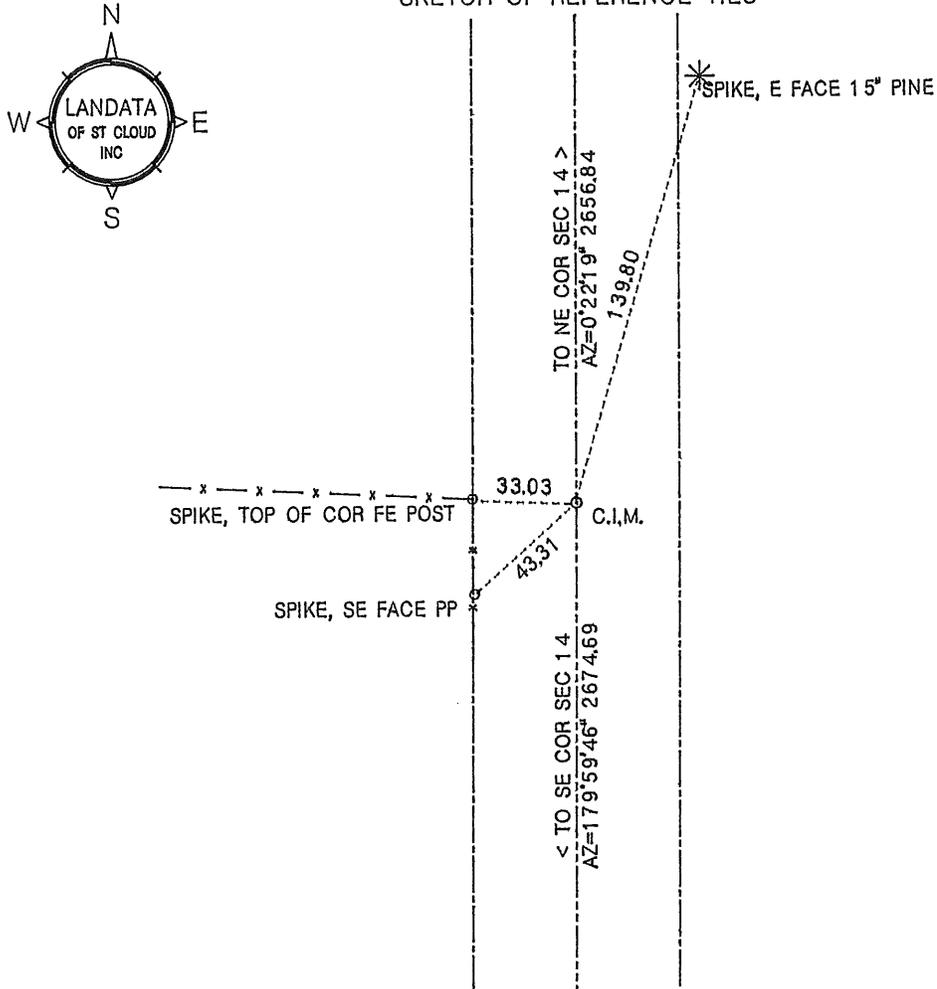

Statement of evidence relative to this corner location on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William F. Lunser 4/1/99
William F. Lunser, L.S. Date
Mn Reg No 9394

OFFICE OF THE COUNTY RECORDER
Benton County, Minnesota

I hereby certify that this document was filed in this office at ___:___ M. on the ___ day of _____, 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

No records were found to indicate use or remonumentation of this corner after its original placement by the U.S. Government Survey.

A search of the area failed to uncover the marker. Occupation lines consisting of fence to west and centerline of road north and south are well defined.

After comparing measured distances to those of the G.L.O. I consider this corner obliterated with the fence line and road centerline serving as its accessories.


William F. Lunser, L.S.

262727

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED

Dec 1 8 52 AM '99

ALICE G. FERGUSON
COUNTY RECORDER

BY  ~~REC'D~~