

Certified, Filed and or Recorded on
Oct. 31, 2008 AT 08:25AM


Signed: M
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 18, Township 38, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8-25-08 found a BROKEN CIM
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

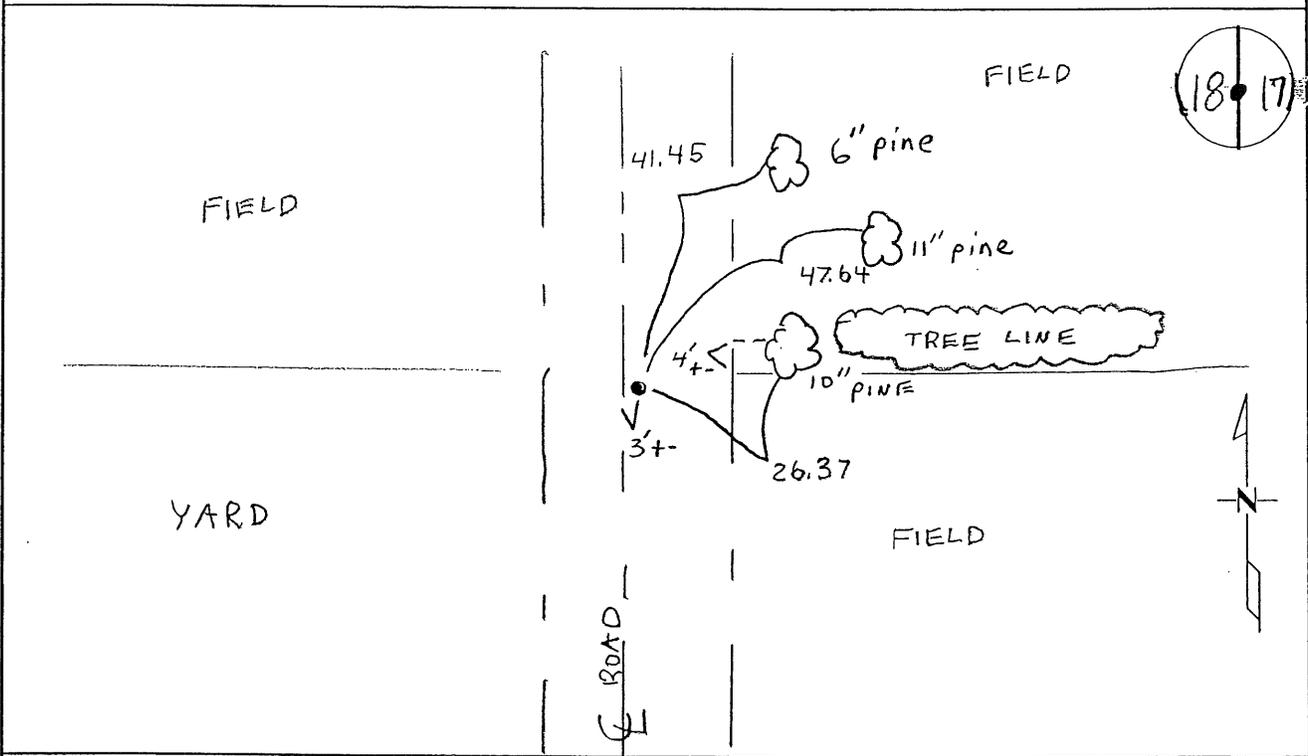

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Chris Hoyle
Deputy County Surveyor
License No. 43932

Date: 10/14/08

Benton County Surveyor's Office
Chris Hoglund, Deputy County Surveyor
Minnesota License No. 43932

Statement of Evidence:

D183

East Quarter Corner of Section 18, Township 38 North, Range 31 West, East Langola Township, 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post in a mound with pit 8 links east at the corner location.
- 1991 David Regan, LS 12236, set a cast iron monument on the centerline of a road north/south and a tree line from the east. He filed a Certificate of Location (#223479).
- 2002 No resurvey information was found on this corner in the Benton County records.
- 2004 MN/DOT
County Coordinates obtained by GPS
NAD 83 (1996 Adjustment)
N-182865.420
E-451856.815
- 2008 Westwood Professional Services, Inc. found a CIM at the intersection of the centerline of a north/south road and a long established tree line to the east. The CIM falls ~9 feet north of a lost position. The tree line to the east is longstanding evidence of the section line location. The CIM is accepted as marking the obliterated position. County Coordinates Obtained by GPS verified the 2004 MN/DOT coordinates.


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 18, Township 38, Range 31, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10-10-91 placed a Cast Iron Monument on center line of township road
DATE
North-South and tree line East

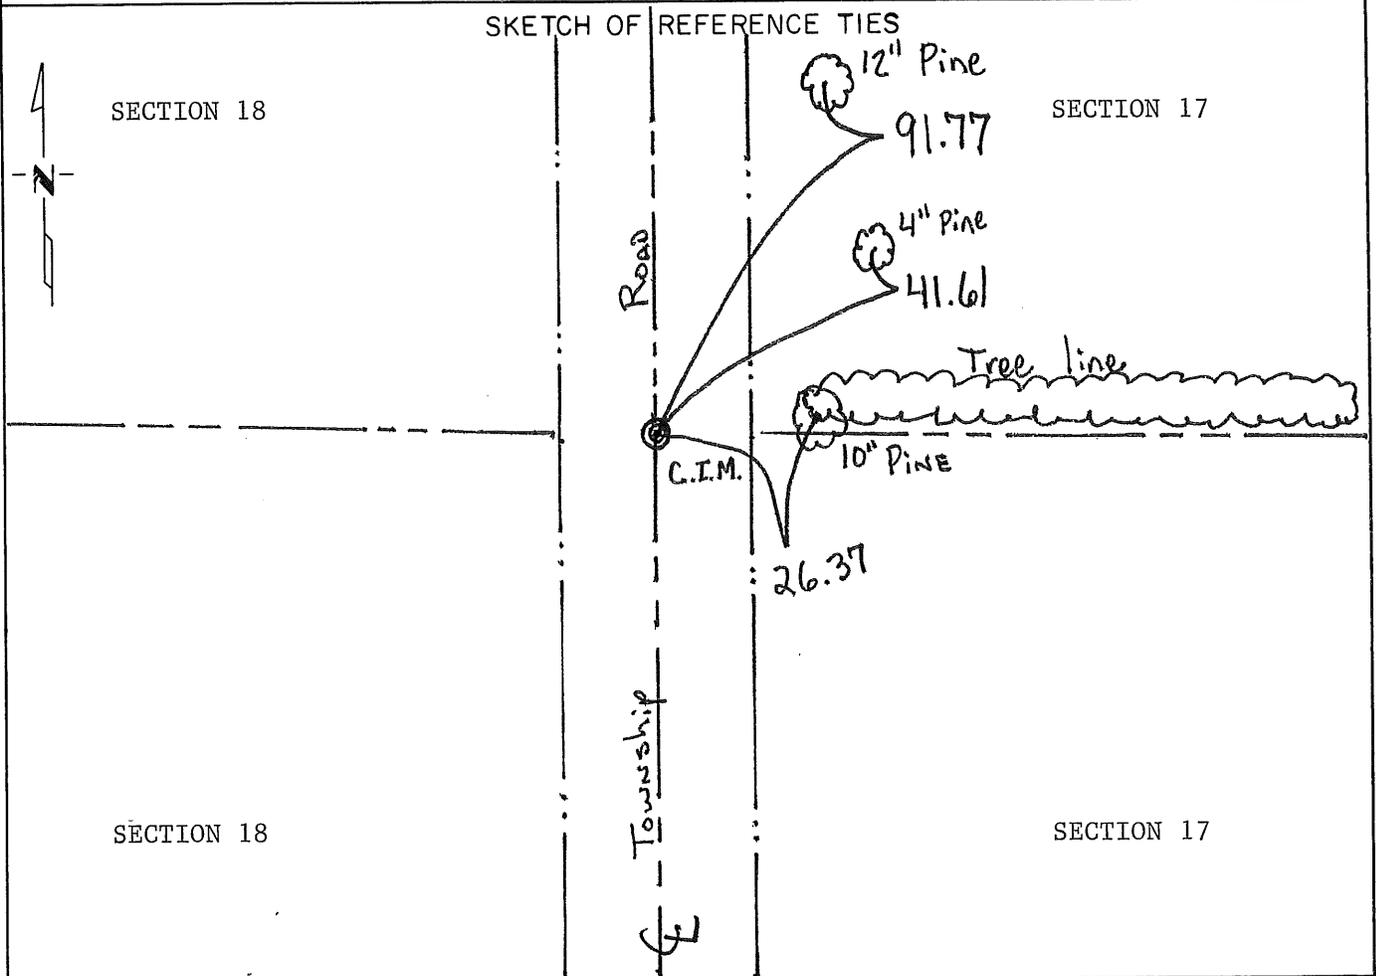

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Regan 5/12/94
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The G.L.O. survey was done in 1852 by Edwin James.

The County Surveyors records were searched with no reference to this corner.

On 10/91, Regan Land Surveyors, Inc. searched the area and then placed a cast iron monument in the centerline of the township road North and South, and a tree line East.

2 2 3 4 7 9

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JUN 17 1 02 PM '94

ALICE C. TRIGGS-MEYER
COUNTY RECORDER

BY *JW* DEPUTY