

Certified, Filed and or Recorded on  
Oct. 31, 2008 AT 08:32AM


Signed: MJ  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 32, Township 38, Range 31  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8-27-08 found a CAST IRON MON
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

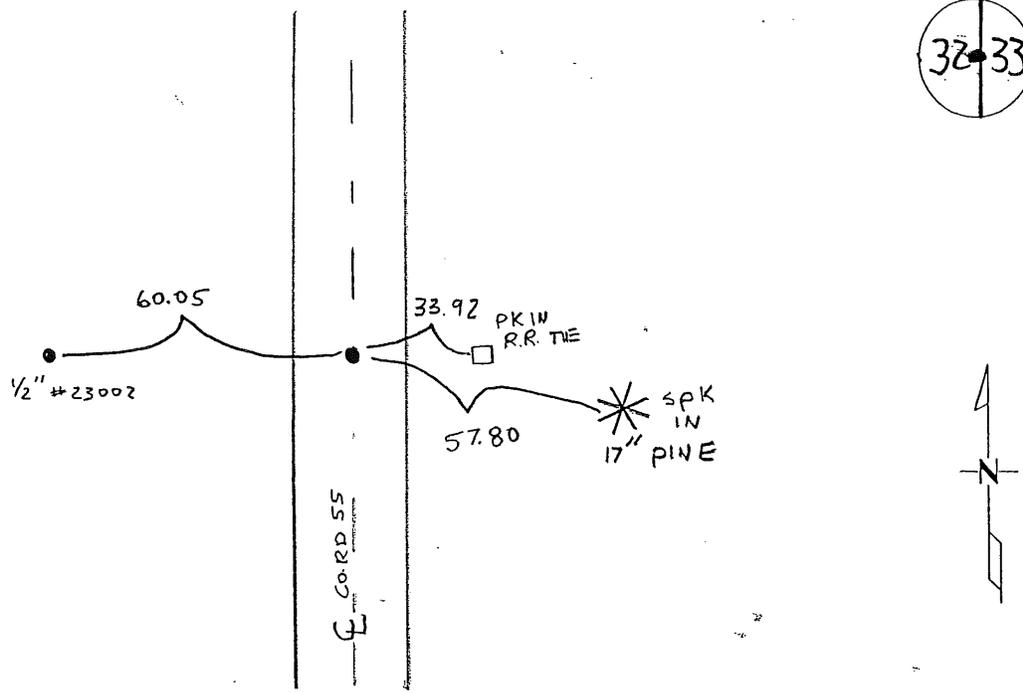

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 10/14/08

Benton County Surveyor's Office  
 Chris Hoglund, Deputy County Surveyor  
 Minnesota License No. 43932

**Statement of Evidence:**

D323

East Quarter Corner of Section 32, Township 38 North, Range 31 West, East Langola Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post in a mound at the corner location.
- 1972 William Lunser, LS 9394, set a RR Spike at the centerline of County Road 55 and at proportionate measurement. He filed a Certificate of Location (#133452). He notes a distance of 2659.25 feet to the NE Corner Sec 32 and the SE Corner Sec 32.
- 1985 William Lunser replaced the RR Spike with a cast iron monument. He filed a Certificate of Location (#191262). He notes a distance of 2659.25 feet to the NE Corner Sec 32 and a distance of 2659.40 feet to the SE Corner Sec 32. His delta angle going north to south is 1-33-30 Rt.
- 1990 Minnesota DNR survey crew found a RR spike and measured 2659.27 feet to the SE corner of Section 32.
- 2003 Surveying & Engineering Professionals, Inc. found a CIM and measured 2659.44 feet to the NE corner and 2659.36 feet to the SE corner.  
 County Coordinates from traverse.  
 NAD 83 (1996 Adjustment)  
 N-166921.393  
 E-457428.876
- 2004 MN/DOT  
 County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-166921.460  
 E-457428.840
- 2008 Westwood Professional Services, Inc. found a CIM at the corner location. CIM is accepted as marking the obliterated corner position. County Coordinates Obtained by GPS coincide with 2004 MN/DOT position.

Record Plats showing corner:


WILDWOOD SOUTH by Paul Wellen filed 11/25/1991  
 WALNUT RIDGE by Scott Gyllen filed 2/20/2002  
 WALNUT RIDGE PLAT 2 by Scott Gyllen filed

*Langelo*

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 25 day of August, 1972  
I did restore the east quarter corner of Section 32,  
Twp. 38, Rg. 31, Benton County, Minnesota, which  
was evidenced by centerline of Co. Rd. No. 55 & proportion measure

I further certify that in order to perpetuate said corner I did  
at the exact location thereof place a permanent marker consisting  
of a railroad spike and that  
I did establish witness or reference monuments as shown below:

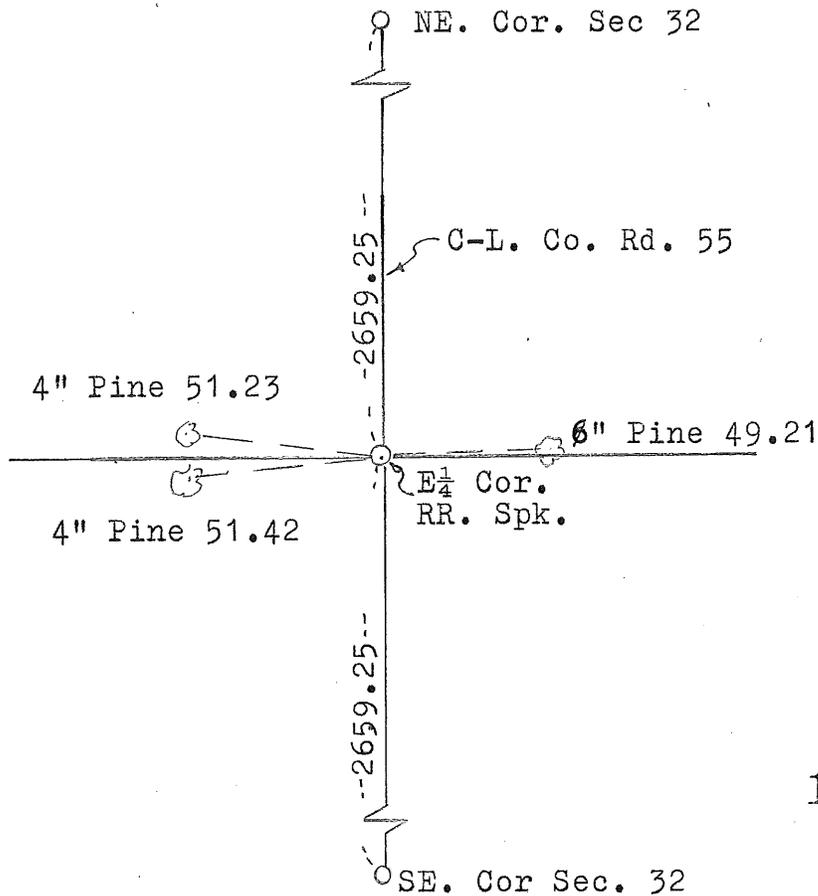

133452

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

*William T. Jensen*

Minn. Registration No. 9394

Office of the Register of Deeds,  
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 9th day of February, 1973.

*J. A. Johnson*  
Register of Deeds

By *Marilyn Novak* Deputy.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 32, Township 38, Range 31, 4<sup>th</sup> P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 10-4-85 found a railroad spike  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 10-4-85 placed a Benton County C.I.M.  
DATE

### SKETCH OF REFERENCE TIES

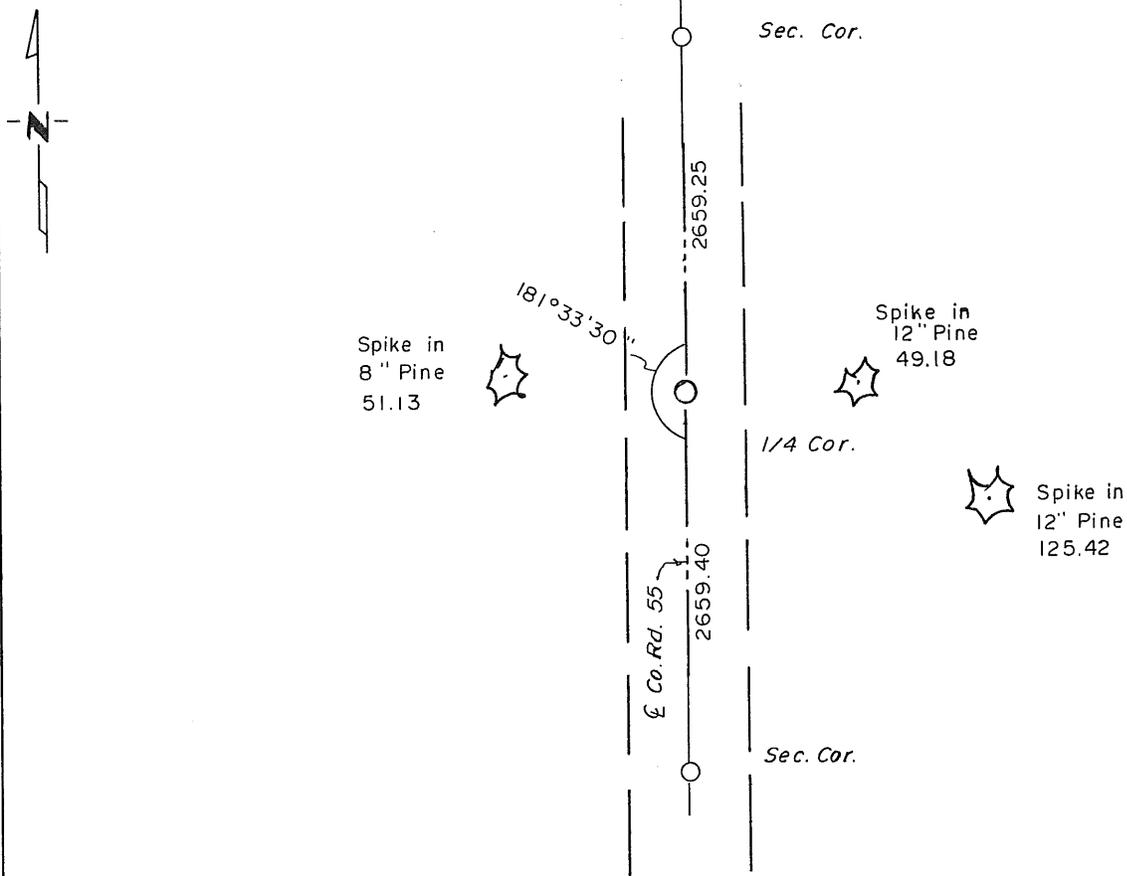

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Luman 12/15/88  
SIGNATURE DATE

Registration No. 9394

Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

### OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

1 9 1 2 6 2

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MO  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 12 12 08 PM '09

ALICE G. ENGELMEYER  
COUNTY RECORDER

BY     *Jw*     DEPUTY