

Certified, Filed and or Recorded on  
Oct. 31, 2008 AT 08:31AM

Signed: MJ  
MARILYN J NOVAK G V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 33, Township 38, Range 31  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 8-26-08 found a CAST IRON MON.

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed on \_\_\_\_\_

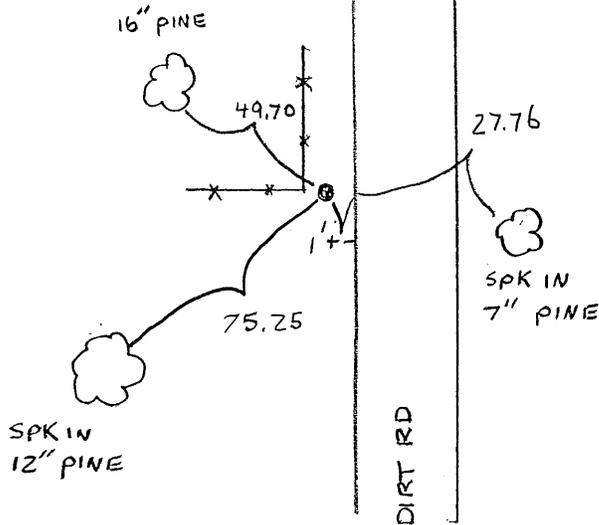

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 10/14/08

Benton County Surveyor's Office  
 Chris Høglund, Deputy County Surveyor  
 Minnesota License No. 43932

**Statement of Evidence:**

D333

East Quarter Corner of Section 33, Township 38 North, Range 31 West, East Langola Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post in a mound with a pit 8 links east at the corner location.
- 1972 William Lunser, LS 9394, set a 1" pipe at a single proportionate measurement (lost position). He filed a Certificate of Location (#134371) and notes a distance of 2678.06 feet to the NE and SE corners of Sec 33.
- 1989 William Lunser set a cast iron monument at the location of the 1" pipe. Corner is in intersection of 15<sup>th</sup> Avenue and 120<sup>th</sup> Street. He filed a Certificate of Location (#195972).
- 2001 Westwood Professional Services, Inc. found CIM. Measured 2678.18 feet to the NE corner and 2677.71 feet to the SE corner.  
 County Coordinates Obtained by GPS – 3<sup>rd</sup> Order  
 NAD 83 (1996 Adjustment)  
 N-166977.478  
 E-462818.546
- 2002 No resurvey information was found on this corner in the Benton County Surveyor records.
- 2004 MN/DOT  
 County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-166977.446  
 E-462818.538
- 2008 Westwood Professional Services, Inc. found a CIM at the corner location. CIM is accepted as marking the obliterated corner position. Coordinates obtained by GPS coincide with 2004 MN/DOT position.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter \_\_\_\_\_ Corner of Section 33, Township 38, Range 31, 4<sup>th</sup> P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE


left monument as found,  lowered monument,  removed monument (explain)

On 12-08-1989 placed a Benton County Cast Iron Monument  
DATE

### SKETCH OF REFERENCE TIES

*Not paid earlier*

*New Hwy*

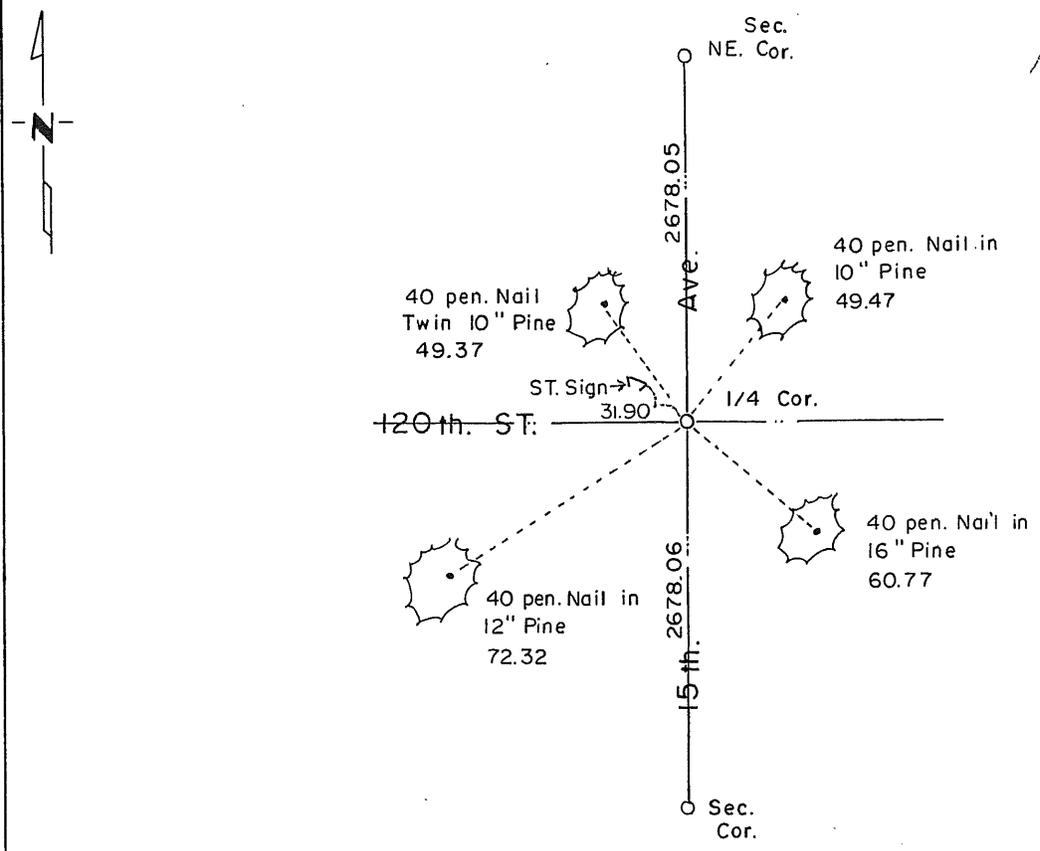

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Lauer 1/5/90  
SIGNATURE DATE

Registration No. 9394

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_  
By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

8-25-1972 Lunser Survey Co. placed a 1" iron pipe at the quarter corner location, took ties and filed a certificate of location with the county recorder.

12-8-1989 Lunser Survey Co. found the 1" iron pipe mentioned above, verified it's location with the existing ties and placed a Benton County Cast Iron Mon.

1 9 5 9 7 2

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 11 8 37 AM '90

ALICE G. ENGELMEYER  
COUNTY RECORDER


BY *fw* DEPUTY

*Langola*

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 25 day of August, 1972  
I did restore \_\_\_\_\_ the east quarter corner of Section 33,  
Twp. 38, Rg. 31, Benton County, Minnesota, which  
was evidenced by single proportion measure

I further certify that in order to perpetuate said corner I did  
at the exact location thereof place a permanent marker consisting  
of a 1" iron pipe and that  
I did establish witness or reference monuments as shown below:

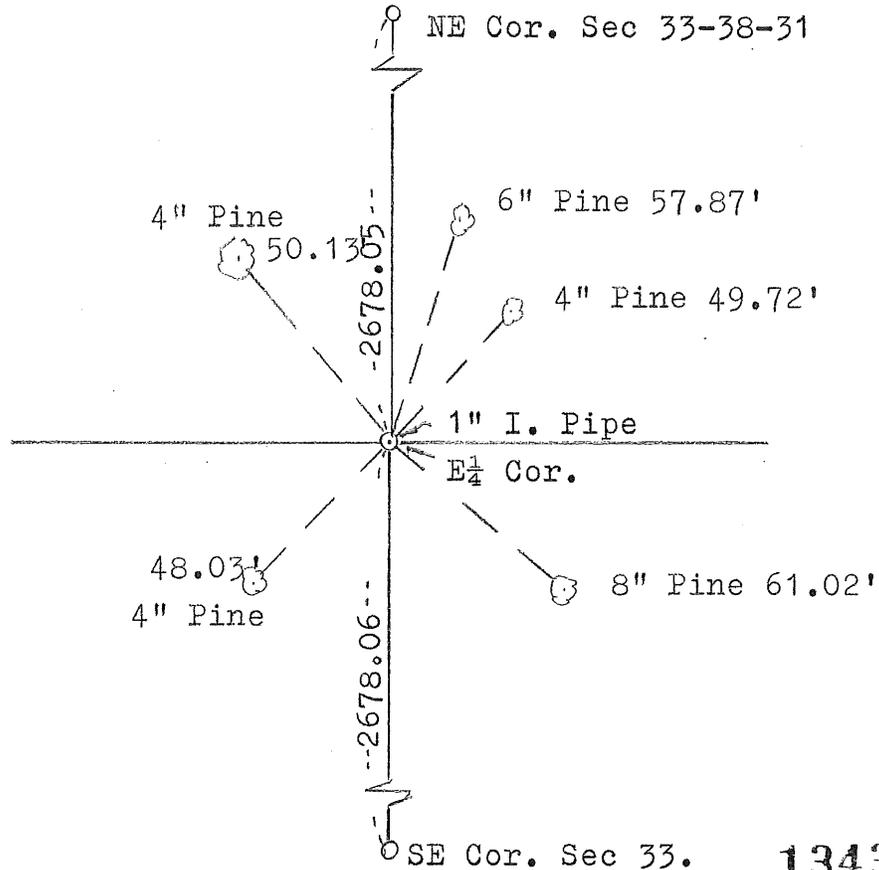

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

*William J. Jensen*

Minn. Registration No. 9394

Office of the Register of Deeds,  
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 11 day of June, 1973.

*SA Johnson*  
Register of Deeds

By M. Novak Deputy.