

A 365920

Certified, Filed and or Recorded on
May 19, 2009 AT 11:19AM


Signed: MJ
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 5, Township 38 North, Range 31 West, Fourth Principal Meridian, Benton County, Minnesota.

At this corner location shown on the sketch:

- On _____ found a _____
- left monument as found lowered monument removed monument (explain)
- On 5/11/2009 placed an MnDOT placed a 3/4-inch pin with cap on south side of.
railroad-tie corner fence post.

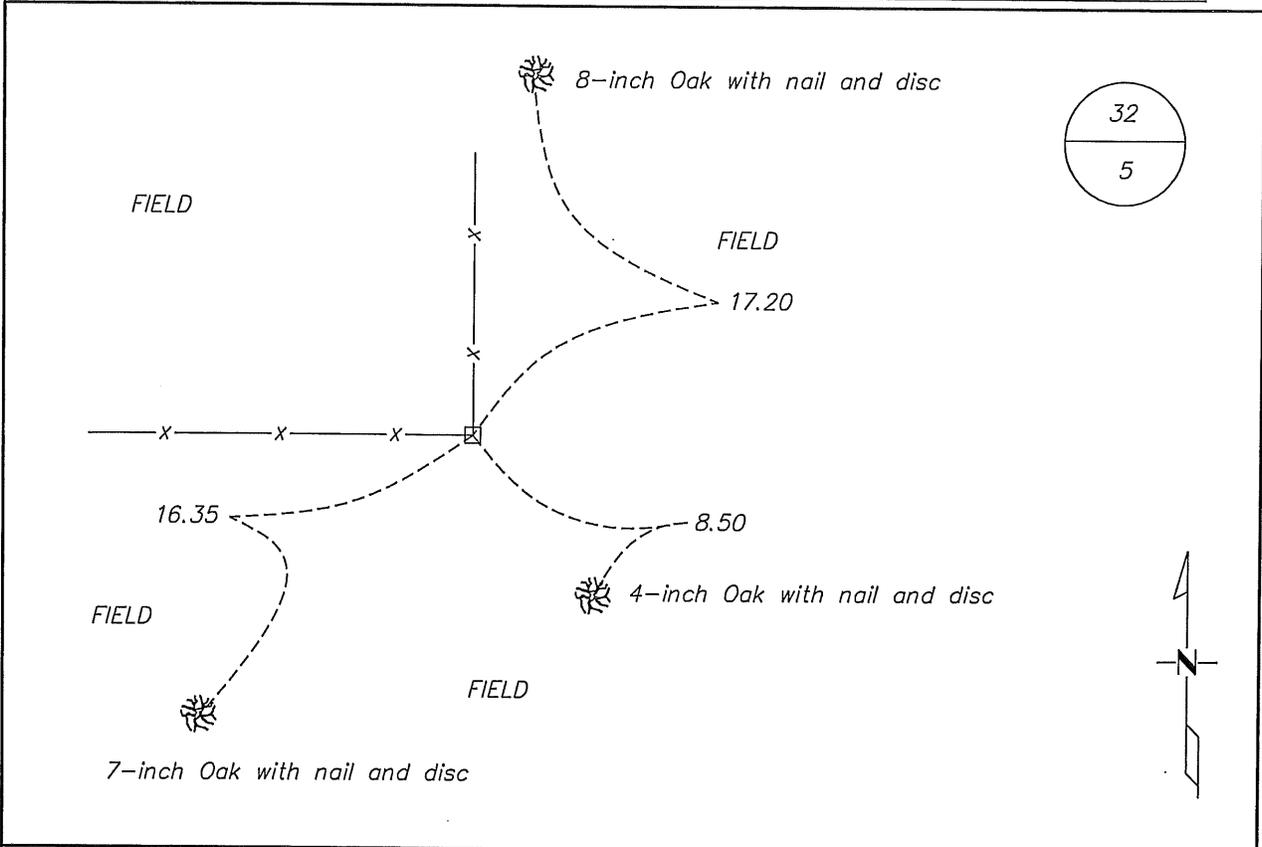

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a Licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 19 MAY 2009

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:**D051**

North Quarter Corner of Section 5, Township 38 North, Range 31 West, East Langola Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

4" Bur Oak	N 25 W	106 links
6" Bur Oak	S 42 E	220 links

2002 No resurvey information found on this corner in the Benton County records.

2008 Westwood Professional Services, Inc. located occupation lines along the north line of Section 5. A fence corner to the north and west was found, which measures 2713.04 and 2683.01 feet respectively to a CIM at the northwest and occupation (north-south centerline and fence line east) at the northeast corners of Section 5. Many of the half-mile distances along the north line of Benton County measure two poles or four poles long. In this case the west half mile measures within six feet with an additional four poles (66 feet) and the east half mile measures within ten feet with an additional two poles (33 feet). Believing the fence to be the best available obliterated evidence, it was computed as the corner position.

2009 The Minnesota Department of Transportation monumented the position with a 3/4-inch pin with aluminum cap on the south side of the railroad tie corner fence post.

Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 196250.616
 E- 454095.101