

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 17, Township 38N, Range 31W, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 11 AUG 1988 found a STONE 3 FEET BELOW EXISTING GRAVEL ROAD SURFACE.
DATE

left monument as found, lowered monument, removed monument (explain)

On 11 AUG 1988 placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

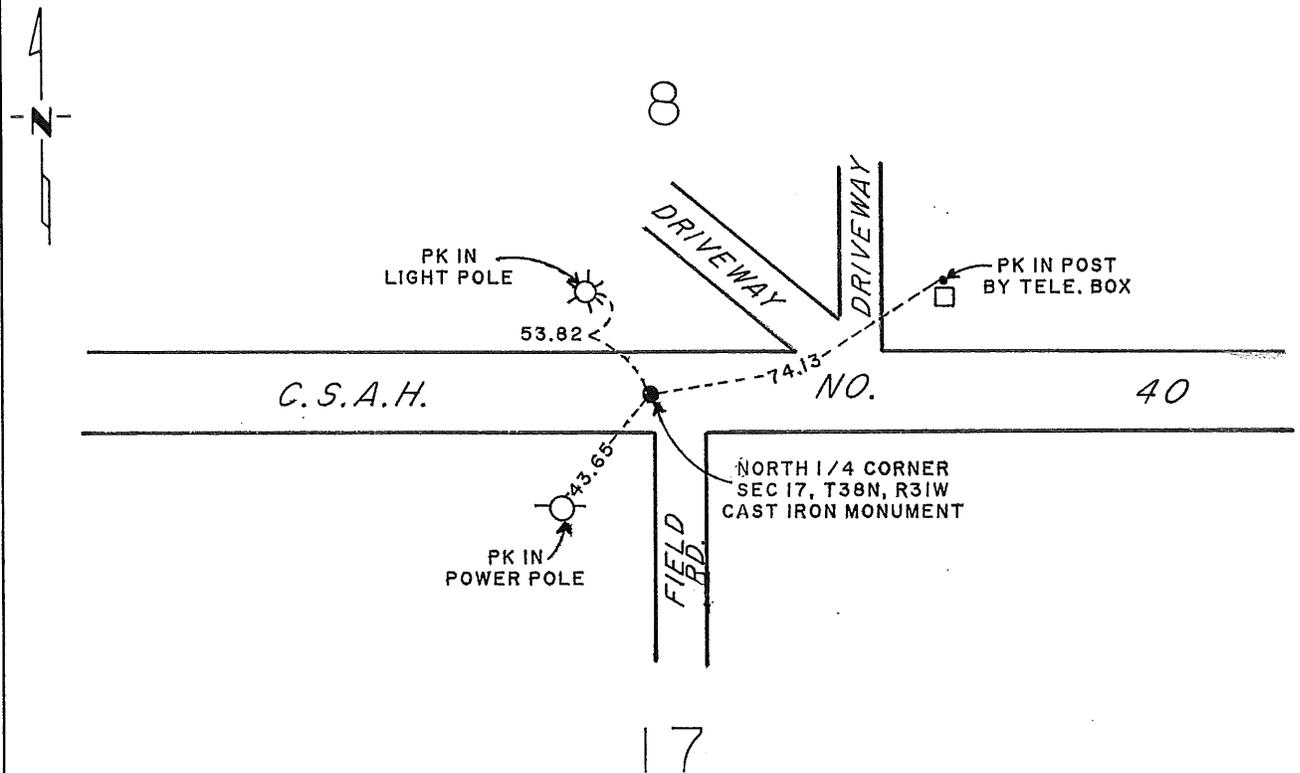

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Skipton 1-3-89
SIGNATURE DATE

Registration No. 17768
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
 County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____
 By _____, Deputy
 DOCUMENT NO. _____

Statement of Evidence:

NORTH QUARTER CORNER, SECTION 17, T38N, R31W, 4TH P.M.

1. The original survey was accomplished in January 1852, by Edwin James Jr.
2. Benton county's old surveyor's books provided no information to re-locate said corner.
3. August 11, 1988, Paul E. Wellen & Associates Inc., dug with a backhoe and located a stone monument. We set a cast iron monument over said stone and made reference ties as indicated.

191340

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, AR
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 20 9 16 AM '89

ALICE B. ENGELMEYER
COUNTY RECORDER

BY Al. DEPUTY