

Certified, Filed and or Recorded on
Sep. 23, 2008 AT 01:29PM



Signed: BW
MARILYN J NOVAK 6 V 1
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 18, Township 38, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8-12-08 found a CAST IRON MON
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

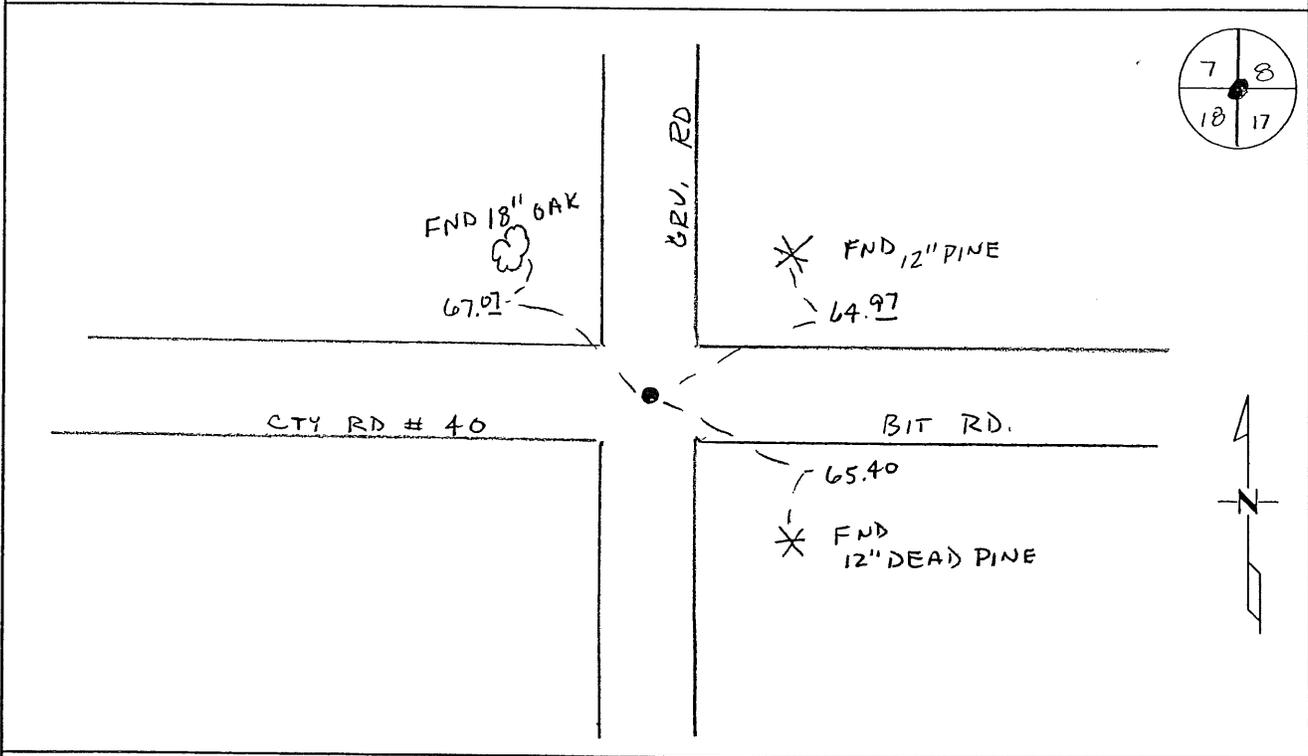

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 8/29/08

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:

D182

Northeast Corner of Section 18, Township 38 North, Range 31 West, East Langola Township, 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|-------------|------------|-----------|
| 12" Bur Oak | N 36 1/2 E | 65 links |
| 12" Bur Oak | N 26 W | 116 links |
- 1941 County Surveyor's Record Book 2, page 98, contains a survey by HG Elleston of Section 7, 38-31. Survey shows this corner as a rock with the following reference ties.
- | | | |
|---------|----|-------|
| 18" Oak | NW | 96.55 |
| 12" Oak | NW | 67.60 |
- 1988 Bruce Skipton, LS17768, dug with a backhoe at the intersection of roads searching for the rock referred to in 1941. He found a wood hub down 2 feet which fit the 1941 tie to an 18" Oak NW at 67.07 feet. On August 18, 1988 Bruce Skipton set a cast iron monument at the location of the hub and filed a Certificate of Location (#191339).
- 2003 6/25/03 Surveying & Engineering Professionals, Inc. found a CIM. County Coordinates determined from SEPI traverse:
 NAD 83 (1996 Adjustment)
 N - 185539.946
 E - 451894.026
- 2004 MN/DOT
 County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-185539.750
 E-451894.017
- 2008 Westwood Professional Services, Inc. found a CIM that fits Bruce Skipton's 1988 ties. Accepted CIM as marking obliterated position and verified 2004 MN/DOT coordinates.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 18, Township 38N, Range 31W, 4th P.M.
STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 11 AUG 1988 found a WOOD HUB 2 FEET BELOW EXISTING GRAVEL SURFACE.
DATE

left monument as found, lowered monument, removed monument (explain)

On 18 AUG 1988 placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

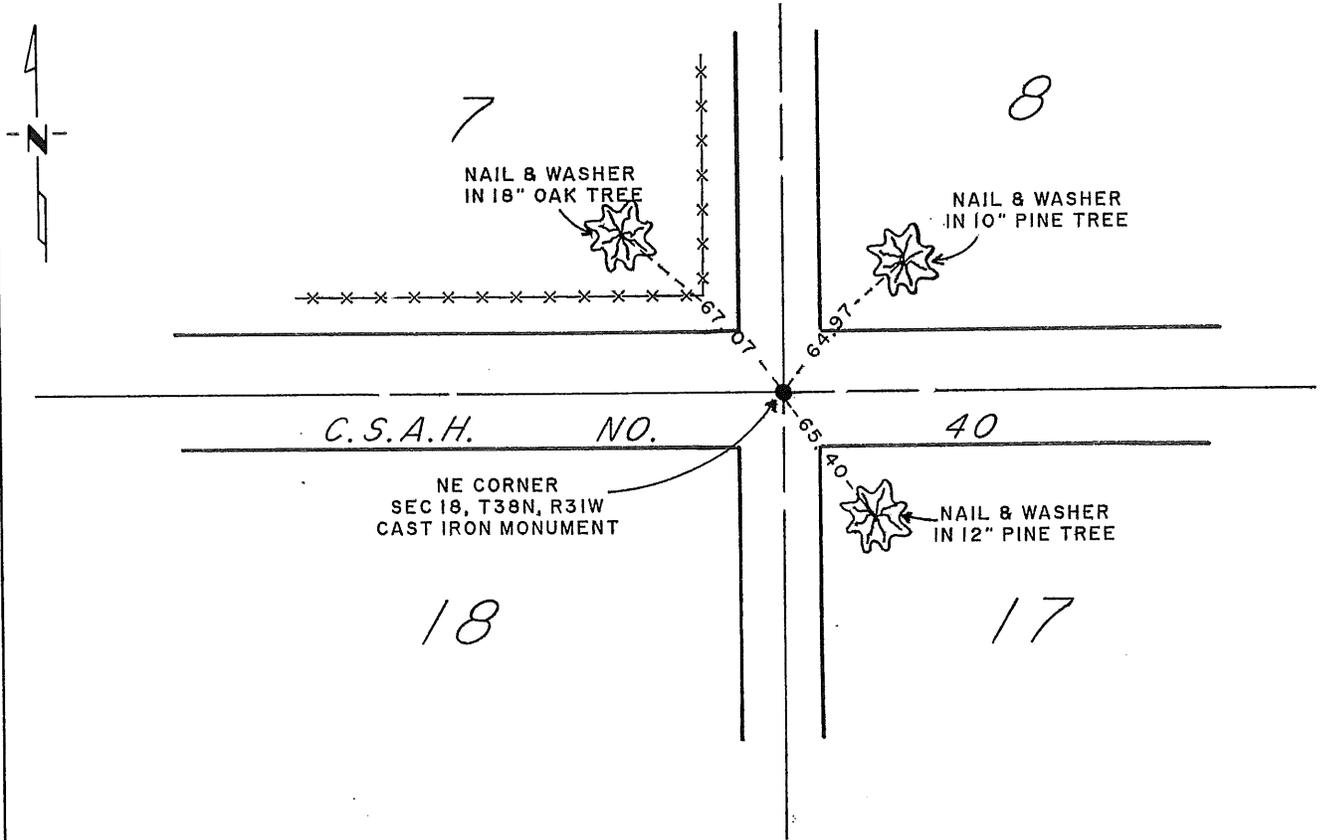

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Skayton 1-3-89
SIGNATURE DATE

Registration No. 17768

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

NORTHEAST CORNER, SECTION 18, T38N, R31W, 4TH P.M.

1. During the G.L.O. survey of 1852, Mr. Edwin James Jr., a U.S. Deputy Surveyor, set a wood post to mark said corner.
2. Benton County's old surveyor's books indicated that a stone was in place with reference ties, no date given. Reference ties are as follows: 18" oak NW 96.55, 12" oak NW 67.60.
3. On August 11, 1988, Paul E. Wellen & Associates Inc., located a 18" oak northwest of the intersection of County Road 40 and the north-south township road. We measured southeast, from said oak 67.0 feet to said intersection. We dug with a backhoe, at said intersection and found a wood hub 2 feet below the existing gravel surface. On August 18, 1988 we set a cast iron monument over said wood hub and established new reference ties as indicated.

191339

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 20 9 13 AM '89

ALICE G. ENGELBEYER
COUNTY RECORDER

BY DEPUTY