

Certified, Filed and or Recorded on  
Nov. 05, 2008 AT 08:24AM



Signed: M  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 21, Township 38, Range 31  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_
- left monument as found       lowered monument       removed monument (explain)
- On 10-16-08 placed an 1/2" IRON PIPE # 4393Z

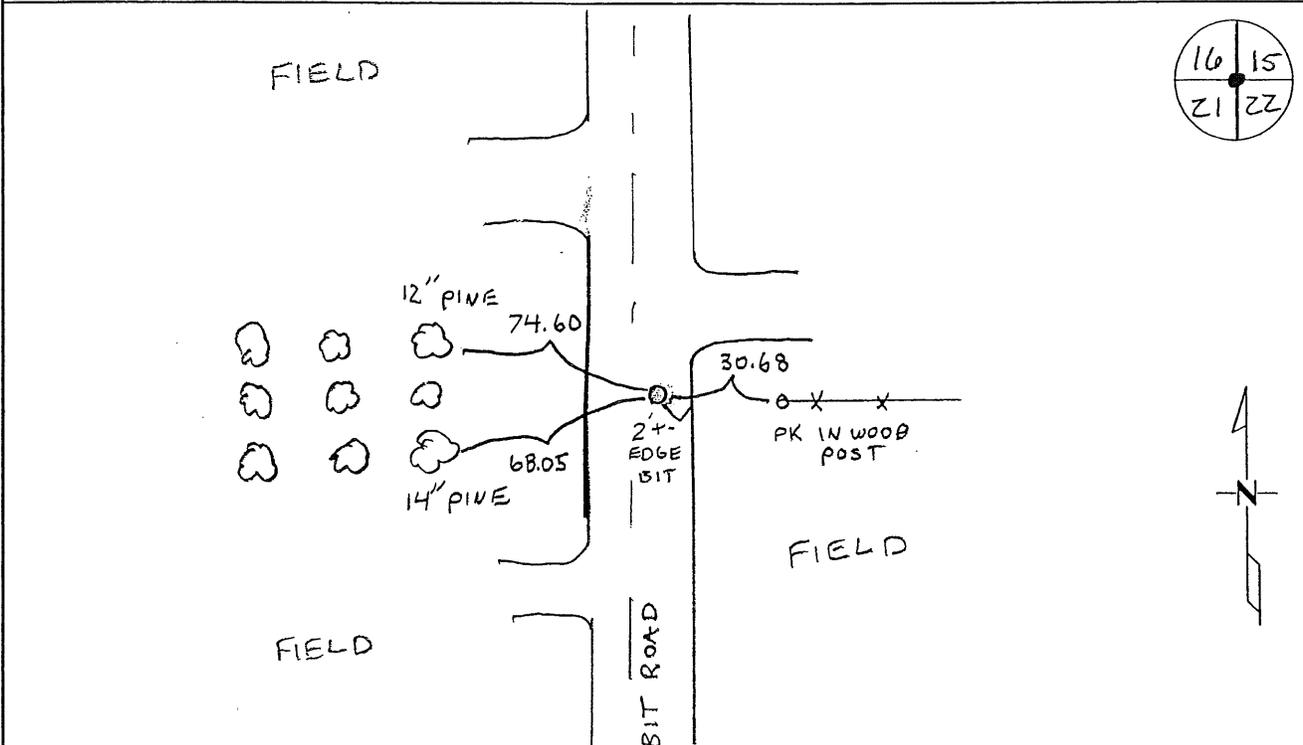

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 11/3/08

**Statement of Evidence:****D212**

Northeast Corner of Section 21, Township 38 North, Range 31 West, East Langola Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post in a mound at the corner location.
- 1916 County Surveyor's Record Book 2, page 82, and Record Book A, Map No. 28, contains a survey of Section 16 by J.P. Soderstrum, which notes that he found no evidence of the corner, so set by proportionate measure from the SW corner of Section 16 (81.20 chains) to the SE corner of Section 15 (80.80 chains).
- No Date County Surveyor's Record Book 2, page 124 notes a stone.
- 1917 County Surveyor's Record Book 2, page 94, notes a survey by N. Drolson and that he found the square stone set by JP Soderstrum.
- 1961 MN/DNR survey crew found granite monument.
- 1976 William Lunser, LS 9394, found a granite stone and left as is. He filed a Certificate of Location (#147071) and notes a distance of 2644.43 feet to the East ¼ corner Sec 16.
- 1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a granite monument:  
N- 180241.632  
E - 462534.786
- 2004 Surveying & Engineering Professionals, Inc. found CIM and used for survey in Section 14.
- 2006 Westwood Professional Services, Inc. found a ½" iron pin at the corner location. Corner fits Lunser measurement to the E1/4 corner of Section 16. County coordinates obtained by GPS. NAD 83 (1996 Adjustment)  
N - 180242.003  
E - 462534.247  
(When coordinates are converted to 1986 Adj., they fit Comstock and Davis location 0.04 feet)
- 2008 Westwood Professional Services, Inc. set a ½"x18" iron pipe #43932 at the 2006 coordinates accepted as marking the obliterated position for this corner.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 21, Township 38, Range 31, \_\_\_\_\_ P.M.  
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On 6-25-1976 found a granite stone  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_ left as it was  
DATE

## SKETCH OF REFERENCE TIES

  
*Refer to next page*

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William T. Lenses 6-25-1976  
SIGNATURE DATE

Registration No. 9394

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS  
County of Benton *County Recorder*

I hereby certify that this document was filed in the Reg. of Deeds office at 9 A .M. on the 20th day of December A.D., 19 77


Register of Deeds T. A. Johnson  
By County Recorder, Deputy

DOCUMENT NO. 147071

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 25 day of June, 1976  
 I did find \_\_\_\_\_ the northeast corner of Section 21,  
 Twp. 38, Rg. 31, Benton County, Minnesota, which  
 was evidenced by granite stone

I further certify that in order to perpetuate said corner I did  
 at the exact location thereof place a permanent marker consisting  
 of \_\_\_\_\_ left as it was \_\_\_\_\_ and that  
 I did establish witness or reference monuments as shown below:

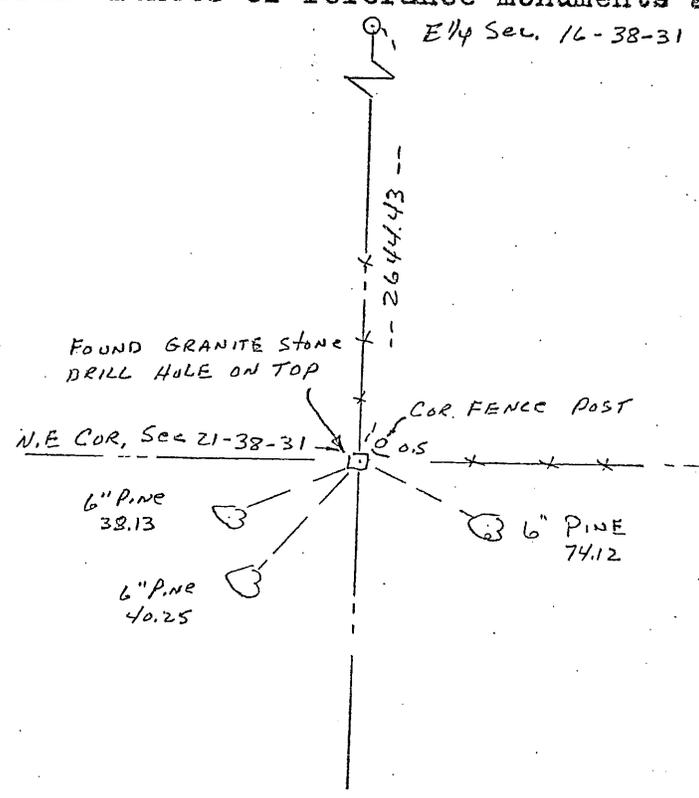

147071

I hereby certify that the  
 above is true and correct  
 and that I am a registered  
 Land Surveyor under the laws  
 of the State of Minnesota.

William J. Luman

Minn. Registration No. 9394

County Recorder  
 Office of the ~~Register of Deeds~~,  
Benton County, Minn.

I hereby certify that the within  
 instrument was filed for record  
 in this office on the 20 day of  
December, 1977 at 9 A.M.

F.G. Johnson  
 Register of Deeds County Recorder

By \_\_\_\_\_ Deputy.