

Certified, Filed and or Recorded on
Sep. 23, 2008 AT 01:13PM


Signed: BW
MARILYN J NOVAK 6 V 1
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 22, Township 38, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8/11/08 found a 8" x 8" GRANITE STONE WITH 1" DIA. HOLE IN CENTER OF STONE.
- left monument as found lowered monument removed monument (explain)
- On 8/12/08 placed on 1/2" x 12" IRON PIPE WITH CAP "RLS 45072" OVER GRANITE STONE, FLUSH WITH PAUEMENT.

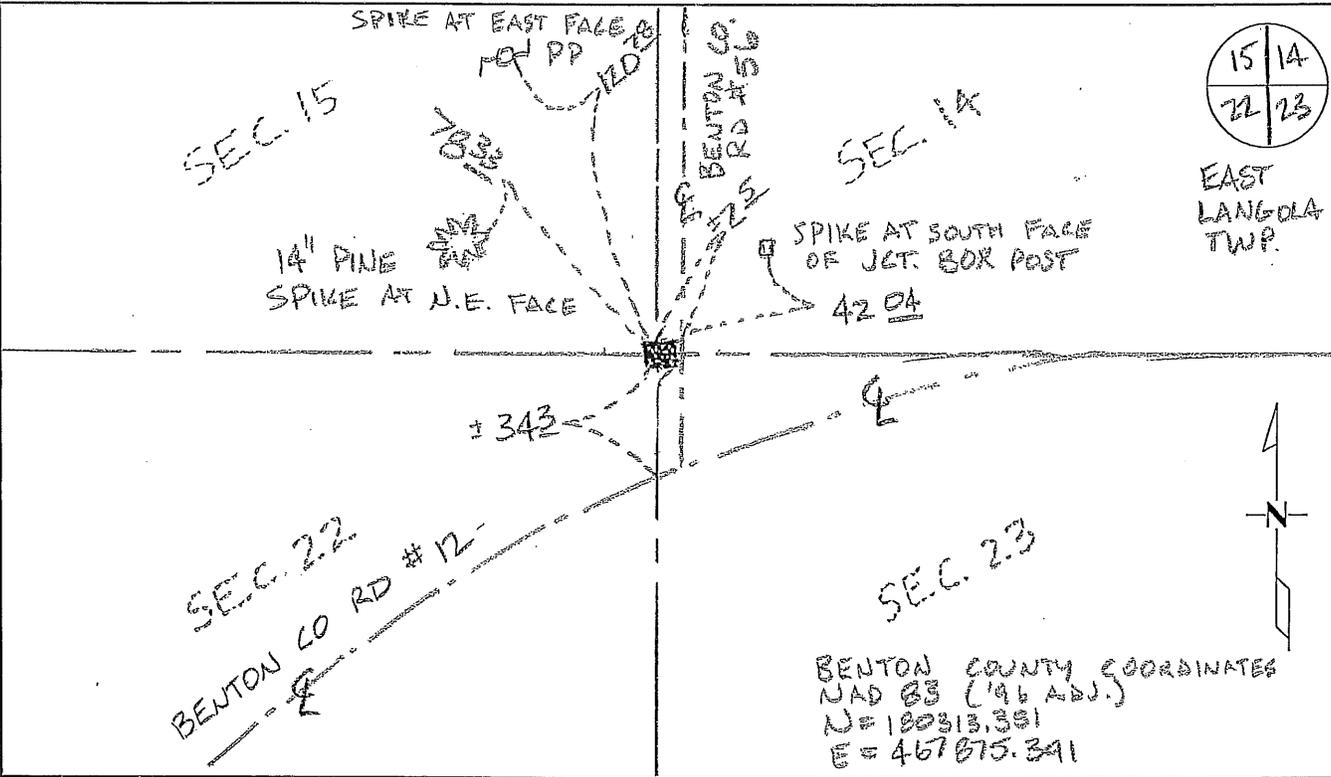

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jean W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 8/12/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

D222

Northeast Corner of Section 22, Township 38 North, Range 31 West, East Langola Township, 4th Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

6" Bur Oak	S 27 E	310 links
6" Bur Oak	N 63 E	258 links

1874 County Surveyor's Record Book 2, page 79 shows road survey by Eli Griffin for road running south and east from this corner.

1916 County Road Book, page 80, contains a road survey by M. J. Cleveland, District Engineer, for State Road No. 4. Survey shows corner found and road run north from the corner

1917 County Surveyor's Record Book 2, page 94, shows that N. Drolson found a square stone at the corner, which was set by Soderstrum. (Note: Soderstrum used this corner for survey of Section 10 in 1916). He also notes the following reference ties:

5" Bur Oak	NW	84.75 links
TP	NE	64.75 links
Fence	S	50.75 links

1961 MN/DNR survey crew found spike in black top road.

1999 William Lunser, LS 9394, set a cast iron monument at the centerline of roads north/south and the westerly extension of the North line of the NE 1/4 of Sec 23. He filed a Certificate of Location (#262724). He notes that he was unable to uncover the marker (stone). He also notes a distance of 2983.90 feet to the North 1/4 corner Sec 23 per Doc. No. 262723 and a distance of 2668.45 feet to the East 1/4 corner Sec 15 per Doc. No. 262725.

2008 The Benton County Surveyor's Office excavated in the vicinity of the cast iron monument a 12'x8'x6' hole, for the square stone called for in the 1917 Survey. The Deputy Surveyor found an 8"x8" granite square stone with a 3/4" drilled hole through the center, at 6 ft ± below the bituminous surface of Benton County Road No. 56. This position falls 5341.62 ft. (80.93 ch) easterly of the Northwest corner of Section 22, also a granite stone, which agrees with the overall distance reported in said 1917 N. Drolson survey of 5332.8 ft. (80.80 ch.) and also with the same reported in said 1961 MN/DNR survey of 5336.0 ft. (80.85 ch). The Surveyor accepted the stone position and set a 1/2" x 12" iron pipe capped "RLS 45872" above the stone, flush with the top of bituminous, approximately 2.5 ft. west of centerline of said north-south County Road No. 56.

County Coordinates

NAD 83 (1996 Adjustment), US Survey feet.


N= 180,313.351

E= 467,875.391

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST corner of Section 22, Township 38, Range 31, 4th P.M.
Benton County, Minnesota.

On Mar 24, 1999, A Benton Co, Cast Iron Monument (C.I.M.) was placed at this location.

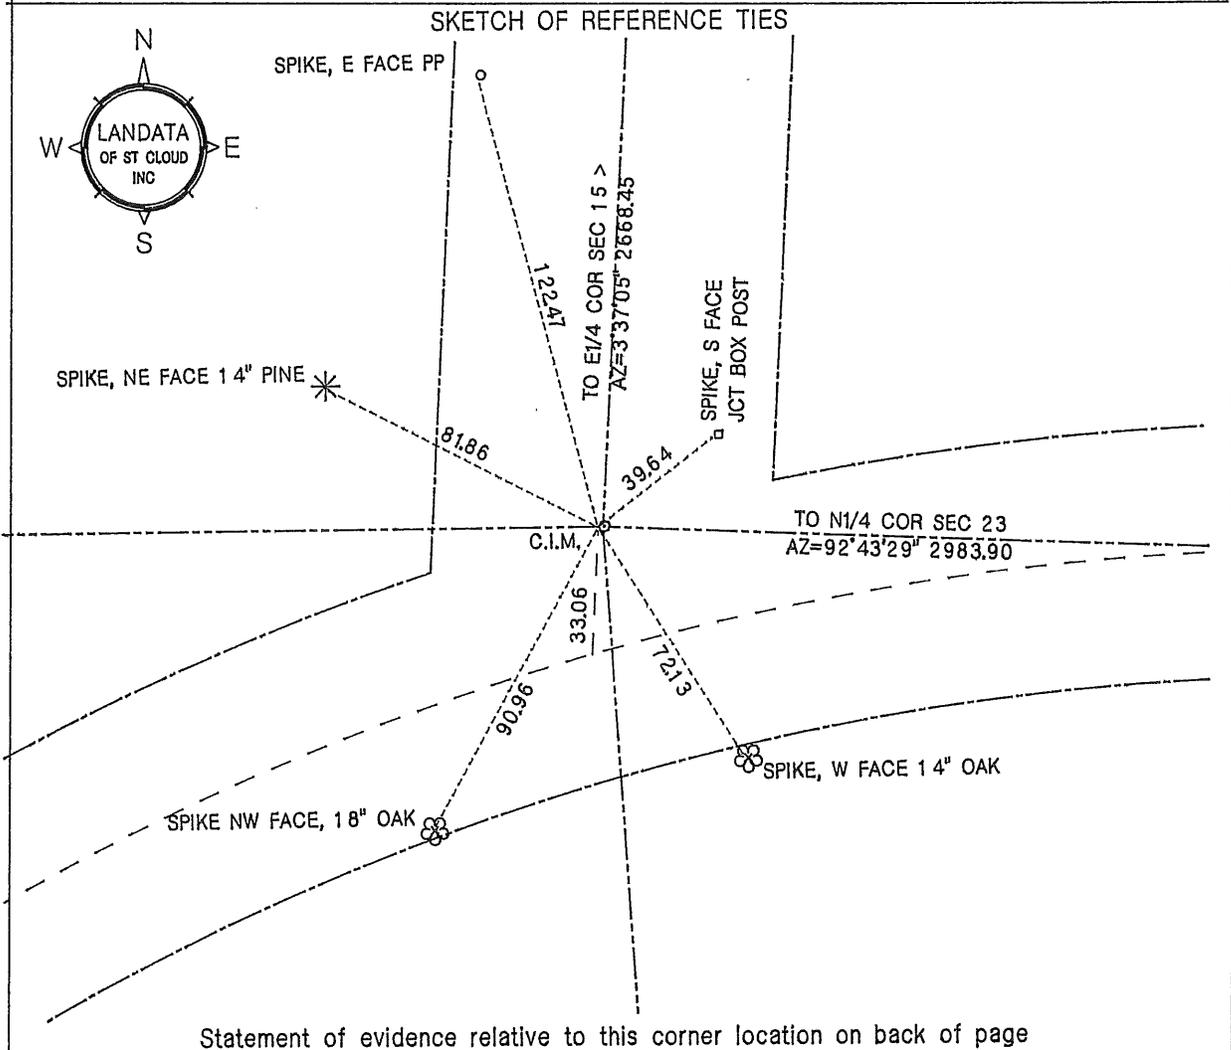

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William F. Lunser 11/1/98
William F. Lunser, L.S. Date
Mn Reg No 9394

OFFICE OF THE COUNTY RECORDER
Benton County, Minnesota

I hereby certify that this document was filed in this office at ___ .M. on the ___ day of _____, 19___.

County Recorder _____

By _____ Deputy


DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

County Surveyor's book in the office of the Benton County Highway Dept indicates a stone monument was placed at this corner.

A search of the area failed to uncover the marker. Occupation lines consist of centerline of a north-south road, there being no distinct lines of occupation east or west.

The corner was restored by intersecting the centerline of the north-south road with the westerly extension of the north line of the Northeast Quarter of Section 23, the latter being the westerly extension of the east tangent of the curved road passing to the south of the corner.


William F. Lunser, L.S.

262724

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED

DEC 1 8 52 AM '99

ALICE C. ENGELMEYER
COUNTY RECORDER

BY  ~~RECORDED~~