

A 361329

Certified, Filed and or Recorded on  
Oct. 31, 2008 AT 08:16AM

Signed: M  
MARILYN J NOVAK  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 30, Township 38, Range 31  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 8-21-08 found a 1/2" I.P. # 12236

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

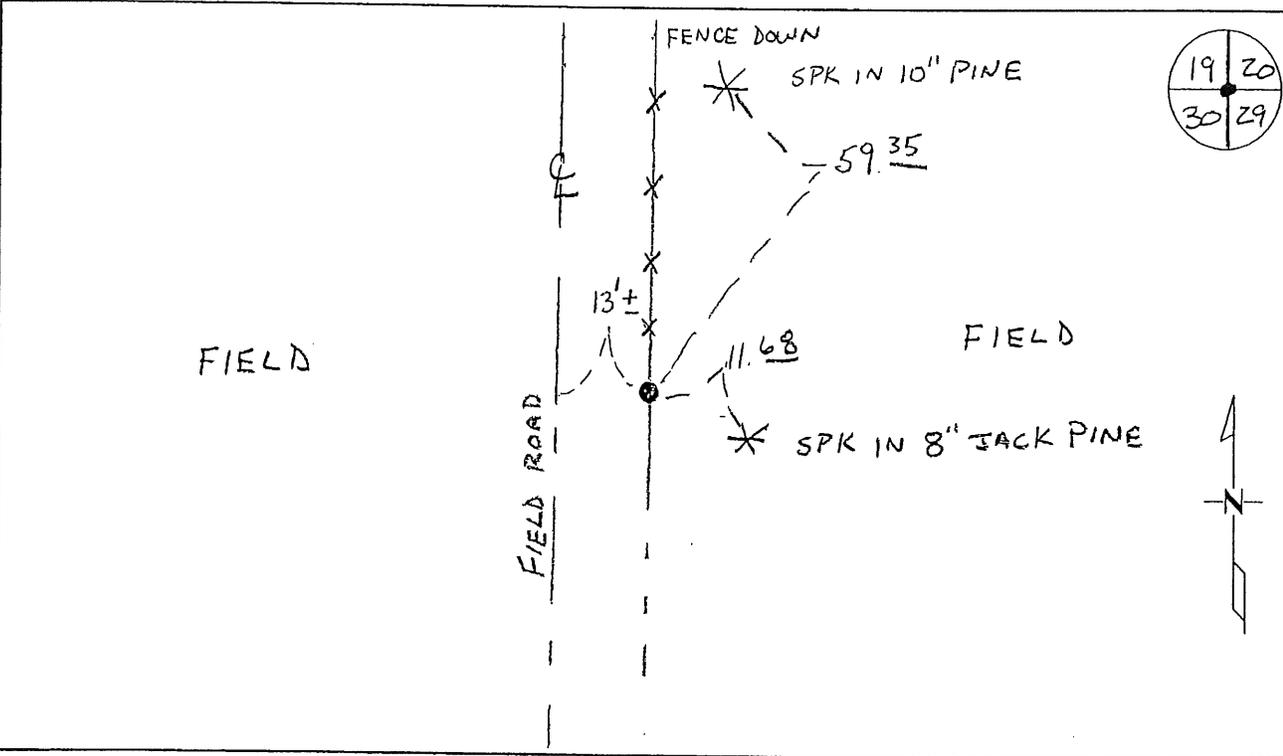

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Ch. Hoyle  
Deputy County Surveyor  
License No. 43932

Date: 10/14/08

Benton County Surveyor's Office  
 Chris Hognlund, Deputy County Surveyor  
 Minnesota License No. 43932

Statement of Evidence:

D302

Northeast Corner of Section 30, Township 38 North, Range 31 West, East Langola Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post in a mound with a pit 8 links south at the corner location.
- 1946 MN/DOT alignment map for TH 10 shows corner assumed at intersection of fence lines north and west being 1556.6 feet west of the centerline.
- 1991 David Regan, LS 12236, set a cast iron monument at the intersection of fence lines from the north and west. He filed a Certificate of Location (#223476).
- 2002 No resurvey information was found on this corner in the Benton County records.
- 2004 Westwood Professional Services, Inc. found a ½ " iron pipe with cap No. 12236 at the corner location.  
 County Coordinates obtained by GPS.  
 NAD 83 (1996 Adjustment)  
 N-174859.631  
 E-452119.896
- 2004 MN/DOT  
 County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-174859.613  
 E-452119.885
- 2008 Westwood Professional Services, Inc. found a ½" iron pipe with cap No. 12236 at the corner location. Corner fits 1991 Regan ties. Fence lines are longstanding evidence of section line locations. Location is accepted as marking the obliterated position. County Coordinates obtained by GPS coincide with 2004 MN/DOT position.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 30, Township 38, Range 31, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 10-10-91 placed a Cast Iron Monument on intersection of fence lines  
DATE  
North and West

SKETCH OF REFERENCE TIES

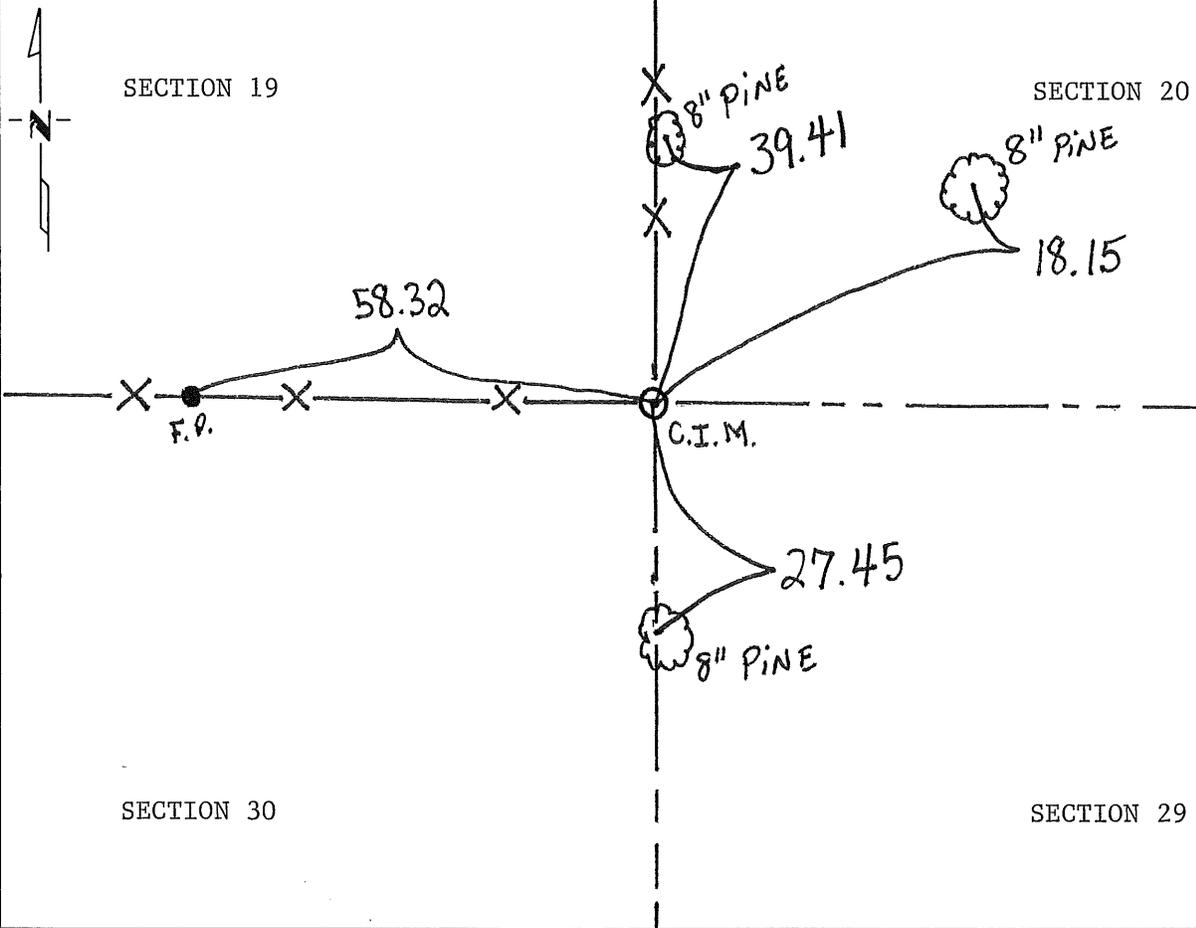

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*David P. Regan* 5/12/94  
SIGNATURE DATE

Registration No. 12236

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

The G.L.O. survey was done in 1852 by Edwin James.

The County Surveyors records were researched with no reference to this corner.

On 10/91, Regan Land Surveyors, Inc. searched the area, then placed a cast iron monument at the intersection of fence lines North and West.

2 2 3 4 7 6

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JUN 17 1 02 PM '94

ALICE C. JOHNSON  
COUNTY RECORDER

BY *Jan* DEPUTY