

MARILYN J. NOVAK  
COUNTY RECORDER  
BY CK DEPUTY

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

293729


2002 DEC 31 P 3:56

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast \_\_\_\_\_ Corner of Section 31, Township 38, Range 31  
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

- On 11/15/02 found a broken off cast iron monument  
DATE
- left monument as found     lowered monument     removed monument (explain)
- On 11/15/02 placed a iron capped #12684 on top of the broken  
DATE off cast iron monument

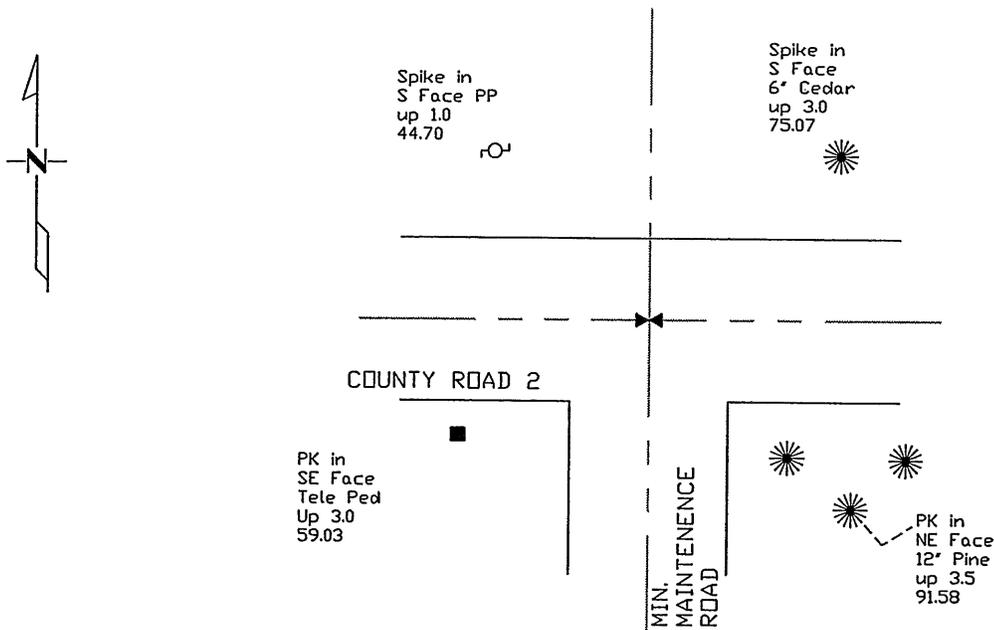

New tree and power pole ties are to the head of a nail with a brass disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature] Date 11/25/02 License No. 12604

Title:  Land Surveyor     Professional Engineer     County Surveyor     County Engineer

**Statement of Evidence:**

**D312**

The Northeast Corner of Section 31, Township 38 North, Range 31 West, East Langola, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

In 1852, Edwin James Jr. set a wood post in a mound at the corner location.

On September 25, 1978 William Lunser set a spike at the centerline of roads east/west/south.

On September 19, 1985 William Lunser replaced the spike with a cast iron monument and filed a Certificate of Location (#191265). A distance of 2670.92 feet was measured to the N 1/4 Corner of Section 32 and a distance of 2624.34 feet was measured to the E 1/4 Corner of Section 31.

In July 2001, Westwood Professional Services, Inc. found a cast iron monument at the corner location.

In November 15, 2002 Westwood Professional Services, Inc. found a broken off cast iron monument at the corner location. We set an iron capped #12684 over the broken monument and established reference ties.

County Coordinates  
NAD 83 (1996 Adjustment)  
N-169533.42  
E-452128.33

75.18  
94.64

Index No. \_\_\_\_\_

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 31, Township 38, Range 31, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 9-19-1985 placed a Cast Iron Monument at the intersection  
DATE of a road east and west and a road to the south

## SKETCH OF REFERENCE TIES

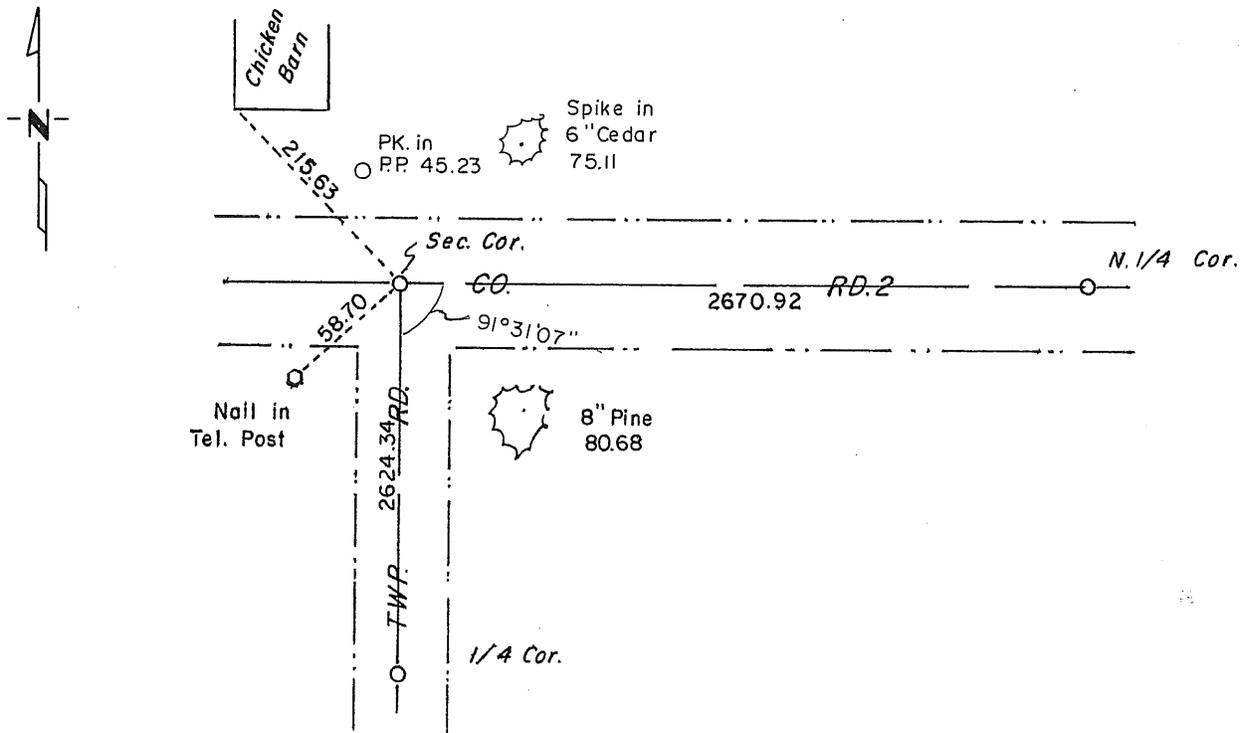

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Lauer 12/15/88  
SIGNATURE DATE

Registration No. 9394

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

## OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

9-25-1978 Set spike at centerline of road (east-west) and center of township road south. Measurements to the east and south supported this location.

9-19-1985 Found spike set in 1978 and replaced with C.I.M.

191265

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 12 12 08 PM '89

ALICE C. ENGELMEYER  
COUNTY RECORDER

BY *Jew* DEPUTY