

MARILYN J. NOVAK
COUNTY RECORDER

BY CK DEPUTY

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

293726

2002 DEC 31 P 3:56

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 33, Township 38, Range 31


4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 7/19/01 found a cast iron monument
DATE

left monument as found lowered monument removed monument (explain)

On 11/15/2002 placed a PK at the location of the cast iron monument
DATE

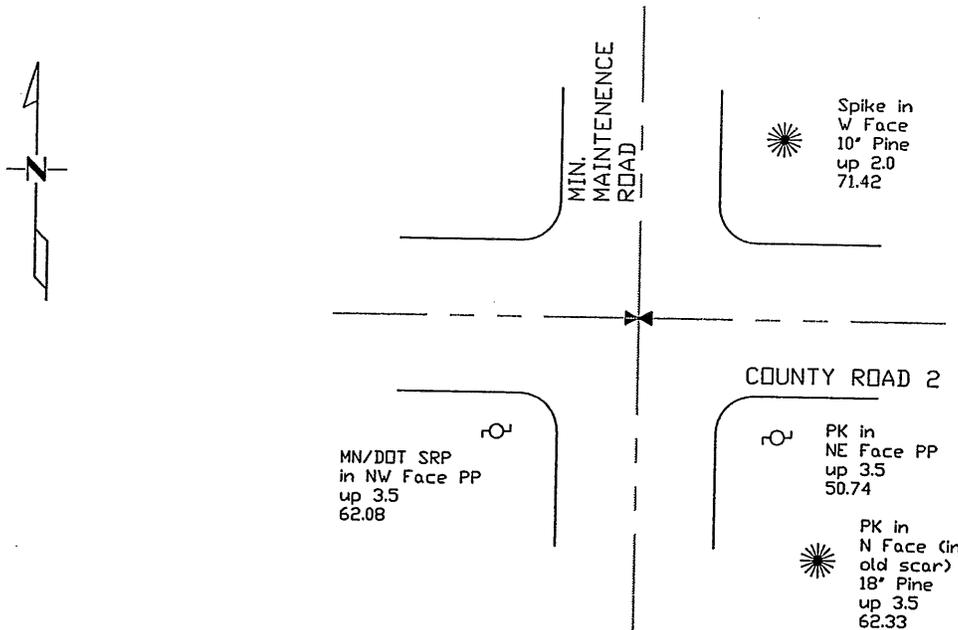

New tree and power pole ties are to the head of a nail with a brass disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature] Date 11/27/02 License No. 12604

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

D332

The Northeast Corner of Section 33, Township 38 North, Range 31 West, East Langola, 4th Principal Meridian, Benton County, Minnesota.

In 1852, Edwin James Jr. set a wood post in a mound at the corner location.

In 1921, the County Surveyors records show that Paul Zeese has an iron at the corner location with the following reference ties.

TP	NE	26.8
Stake	N	25.0

On August 25, 1972 William Lunser set a RR spike at the centerline of County Road 2 and at distances proportionate to the Benton County Highway stationing. A Certificate of Location (#133450) was recorded. The following distances were taken from said certificate and are measured from the NE Corner of Section 33.

2676.57 feet to the N 1/4 Corner Section 33
2678.05 feet to the E 1/4 Corner Section 33
2709.82 feet to the N 1/4 Corner Section 34

On December 7, 1989 William Lunser set a cast iron monument at the location of a 1/2" iron pipe after verifying the location with existing ties. A Certificate of Location (#195973) was filed. The following distances were taken from said certificate and are measured from the NE Corner of Section 33.

2678.05 feet to the E 1/4 Corner Section 33
2709.82 feet to the N 1/4 Corner Section 34

On November 10, 2000 Sam Deleo notes on Certificate of Location (#271521) that the E 1/4 Corner of Section 28 is 2673.06 feet N of the NE Corner of Section 33. Certificate of Location (#271527) records that he found a cast iron monument at the corner location.

In July 2001, Westwood Professional Services, Inc. found a cast iron monument at the intersection of the centerline of County Road 2 (running east and west) and fence lines from the north and south.

In April 2002 Westwood Professional Services, Inc. located monuments along County Road 2, prior to road construction, using GPS.

On November 15, 2002 Westwood Professional Services, Inc. set a PK at the location of the found cast iron monument. We did not dig after the road construction.

County Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-169655.616
E-462833.839

271527

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 30 4 04 PM '01

ALICE G. ENGELMEYER
COUNTY RECORDER

BY mm DEPUTY cm

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 33, Township 38 N, Range 31 W
4th Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 11/10/2000 found a BENTON COUNTY CAST IRON MONUMENT, DOWN 0.3'
DATE

left monument as found lowered monument removed monument (explain)

On _____ placed a _____
DATE

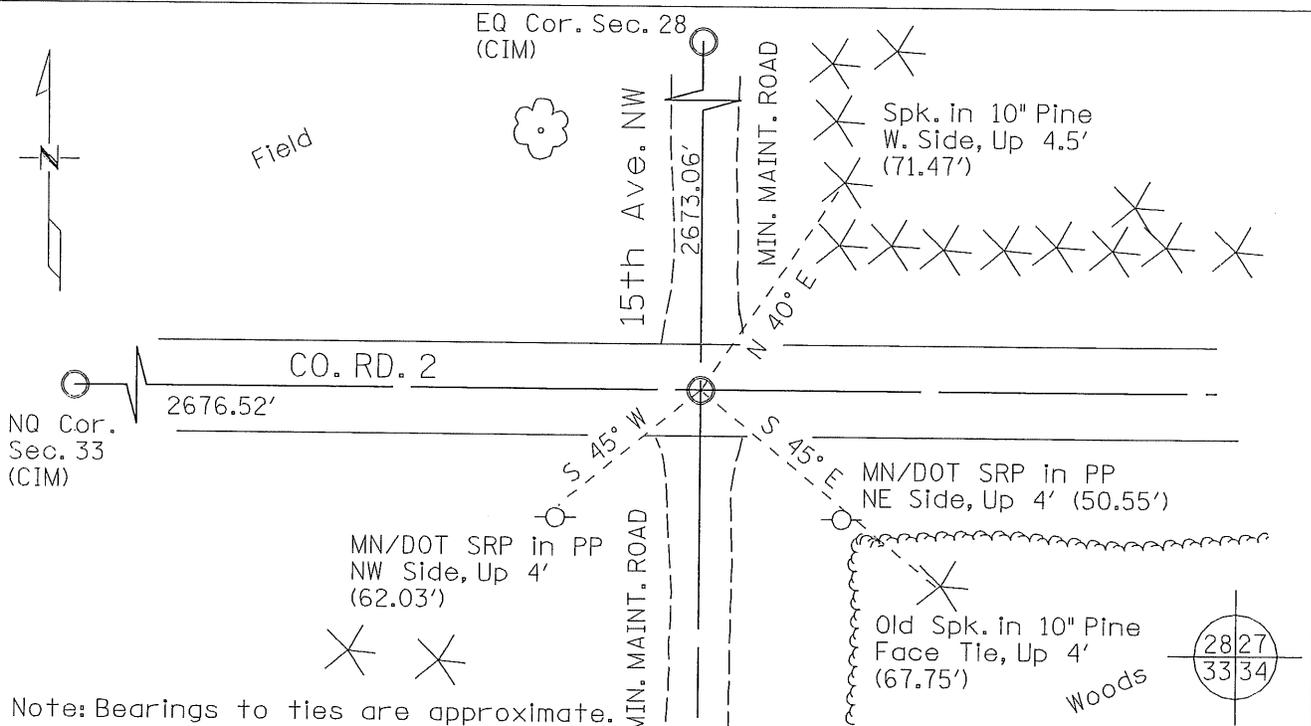

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature Samuel J. Debo Date 1-15-2001 License No. 40341

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence

Northeast Corner of Section 32, Twp. 38 N, Rng. 31 W
4th P.M., Benton County, Minnesota

Copies of notes from the original GLO survey, located in the office of the Benton County Highway Department, state that a wood post was set to mark the corner 80.98 chains West, from the NE Corner of Sec. 33. No ties to the post are listed.

1942; Minnesota Department of Highways R/W map (Index #33-100) for S. P. 0502 (TH 10) lists the corner as " Sec. Cor. at Int. of Rds. E. W. N. ". There are no dimensions, ties, or monuments listed. A Minnesota Department of Highways R/W map labeled "Belt Line In Rice", date unknown, also lists the corner as " Sec. Cor. at Int. of Rds. E. W. N. ". It also refers to a ½" I. Pipe as being inplace. It shows distances cumulative to 2681.5feet from the NE Corner of Section 32 to the North Quarter Corner of Section 33. It doesn't specify a monument type for the North Quarter Corner of Section 33. Both of these maps are on file at the Minnesota Department of Transportation in Baxter and in St. Cloud.

March 1957; A survey by M.B. Lang CE labeled "Survey of Tract Frac. Sections 32 & 33 T 38 N, R 31 W" specifies this corner as being marked by an "I. M.". Copy of said survey was obtained at the office of David Regan Land Surveying, St. Cloud.

August 1972; William Lunser, RLS #9394 found a ½" iron pipe inplace. He recorded reference ties and filed a Certificate of Location of Government Corner. Refer to Document No. 133451 in the office of the Benton County Recorder.

November 2000; Sam DeLeo, RLS #40341, found a ½" iron pipe flush in the bituminous surface of the intersecting roads. The ½" by 24" iron pipe was removed and a 1 ¼" iron pipe was found under the ½" iron pipe at a depth of 1.6' below the bituminous surface. The ½" by 24" iron pipe was replaced with a Benton County cast iron monument which was set over the 1 ¼" iron pipe. New ties were recorded and a new Certificate of Location of Government Corner was made.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 33, Township 38, Range 31, 4th P.M.

STATE OF MINNESOTA, County of _____


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 12-07-89 placed a Benton County Cast Iron Mon.
DATE

SKETCH OF REFERENCE TIES

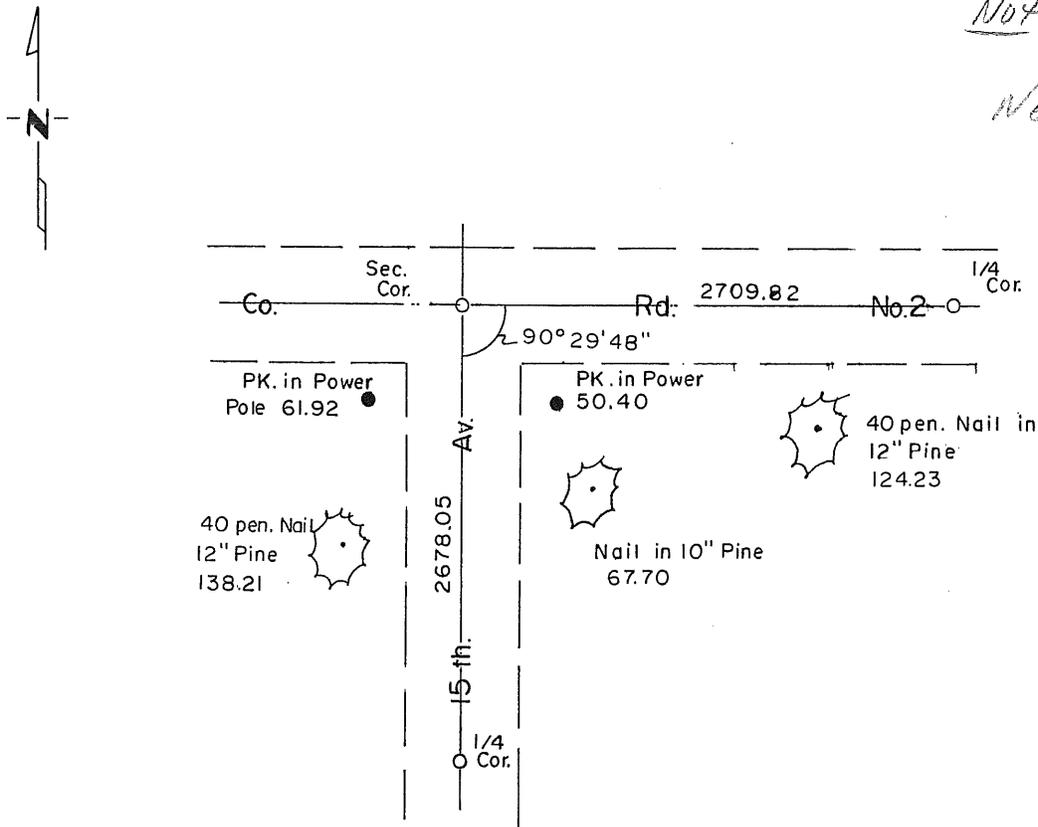

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Lerner 11/5/90
SIGNATURE DATE

Registration No. 9394

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

8-25-1972 Lunser Survey Co. placed a railroad spike at the section corner, took ties and filed a certificate of location with the county recorder.

12-08-1989 Lunser Survey Co. found a $\frac{1}{2}$ " iron pipe at the same location as above, verified it's location with existing ties and replaced with a Benton County Cast Iron Mon.

195973

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 11 8 37 AM '90

ALICE G. ENGELMEYER
COUNTY RECORDER


BY Jew DEPUTY

Lansdale

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 25 day of August, 1972
I did restore the northeast corner of Section 33,
Twp. 38, Rg. 31, Benton County, Minnesota, which
was evidenced by centerline Co. Rd. No. 2 and distances to east
and west proportioned to Benton county highway stationing.

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of a railroad spike and that
I did establish witness or reference monuments as shown below:

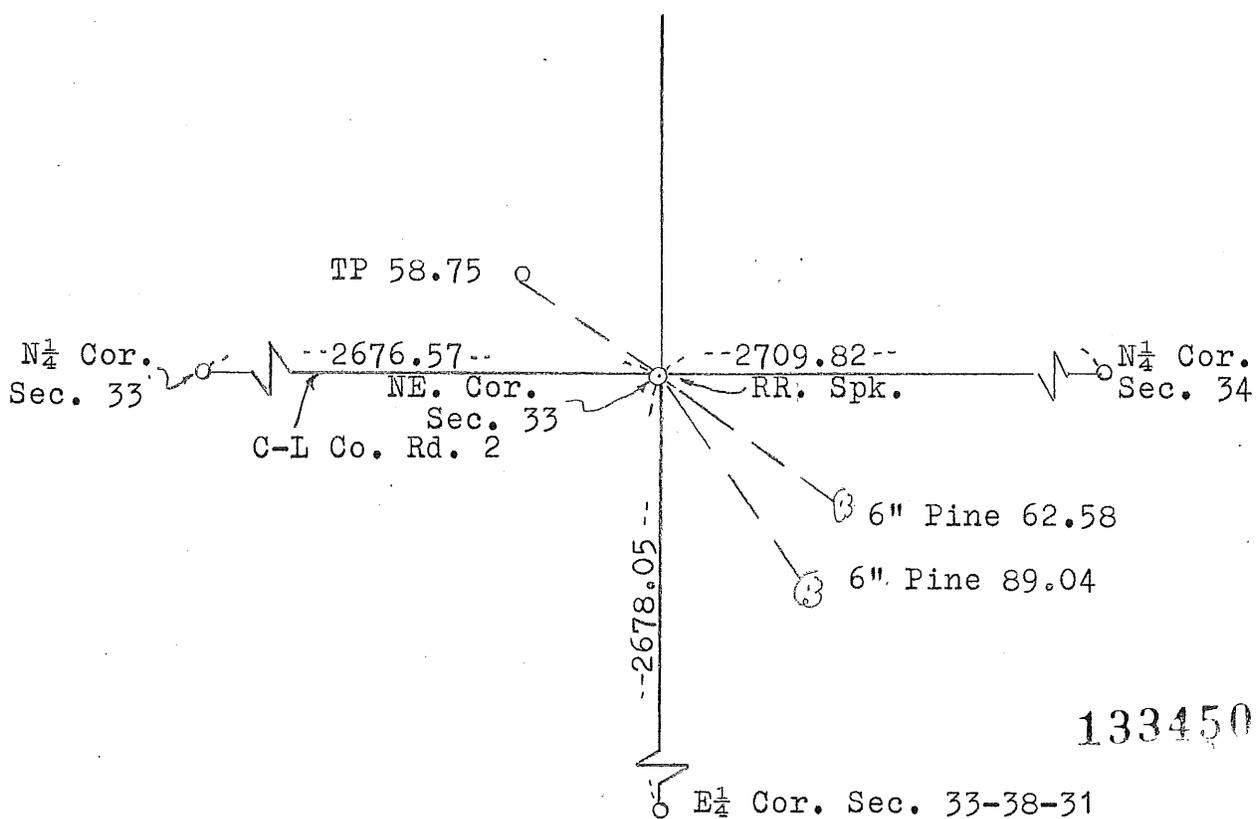

133450

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

William T. Larson

Minn. Registration No. 9394

Office of the Register of Deeds,
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 9th day of February, 1973.

J. A. Johnson
Register of Deeds

By *William T. Larson* Deputy.