

MARILYN J. NOVAK
COUNTY RECORDER

BY CK DEPUTY

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

293724


2002 DEC 31 P 3: 56

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 34, Township 38, Range 31
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

- On 07/19/01 found a cast iron monument
DATE
- left monument as found lowered monument removed monument (explain)
- On 11/15/2002 placed a iron capped #12684 at the location of
DATE
the cast iron monument

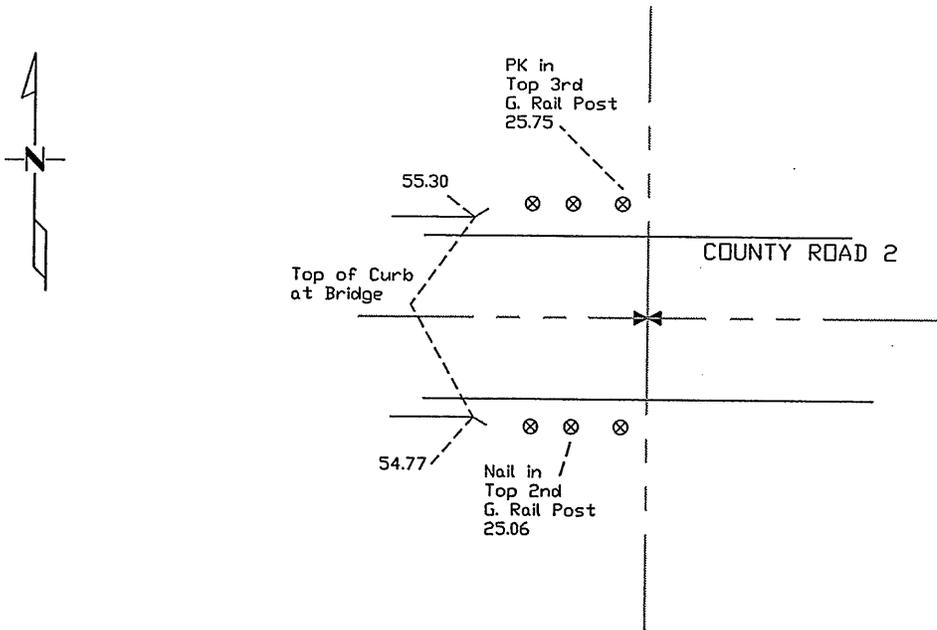

New tree and power pole ties are to the head of a nail with a brass disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature] Date 11/27/02 License No. 12684

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

D342

The Northeast Corner of Section 34, Township 38 North, Range 31 West, East Langola, 4th Principal Meridian, Benton County, Minnesota.

In June 1852, Edwin James Jr. set a wood post at this location and bearing trees were recorded.

10" Ash	N 43 E	32 links
10" Ash	S 75 W	16 links

On November 28, 1973 William Lunser set a 1/2" iron pipe at the centerline of County Road 2 and a proportionate distance between the N 1/4 Corner of Section 34 and the N 1/4 Corner of Section 35. A distance of 2680.93 feet was measured to both corners.

In July 2001, Westwood Professional Services, Inc. found a cast iron monument at the centerline of County Road 2 (running east and west).

In April 2002 Westwood Professional Services, Inc. located monuments along County Road 2, prior to road construction, using GPS.

On November 15, 2002 Westwood Professional Services, Inc. set an iron capped #12684 at the location of the found cast iron monument after the road construction.


County Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-169650.198
E-468224.673

Largely

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 28th day of November, 1973
 I did reestablish the northeast corner of Section 34,
 Twp. 38, Rg. 31, Benton County, Minnesota, which
 was evidenced by The center line of County Road 2 and
proportional measure from the north quarter corner of said
Section 34 to the north quarter corner of Section 35

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of 1/2 inch iron pipe and that
 I did establish witness or reference monuments as shown below:

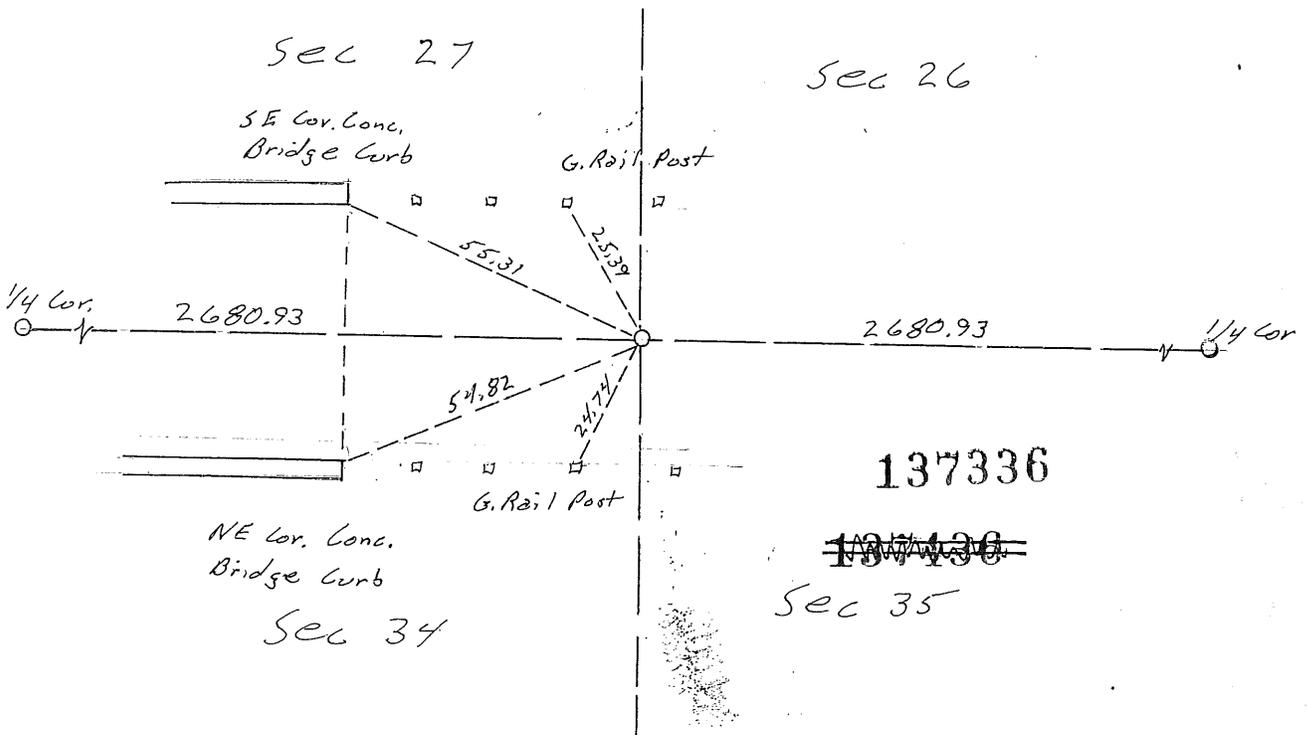

I hereby certify that the
 above is true and correct
 and that I am a registered
 Land Surveyor under the laws
 of the State of Minnesota.

William J. Lunder

Minn. Registration No. 9394

Office of the Register of Deeds,
Benton County, Minn.

I hereby certify that the within
 instrument was filed for record
 in this office on the 27th day of
August 10 A.M., 1974.

Harold Johnson
 Register of Deeds

By _____ Deputy.