

Certified, Filed and or Recorded on
Nov. 07, 2008 AT 02:25PM


Signed: Ju
MARILYN J NOVAK E V J
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 7, Township 37N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/29/08 found a RAIL ROAD SPIKE DOWN 0.4'
- left monument as found lowered monument removed monument (explain)
- On 10/29/08 placed an PK NAIL WITH BENTON COUNTY SURVEYOR DISK
FLUSH WITH ROAD SURFACE.

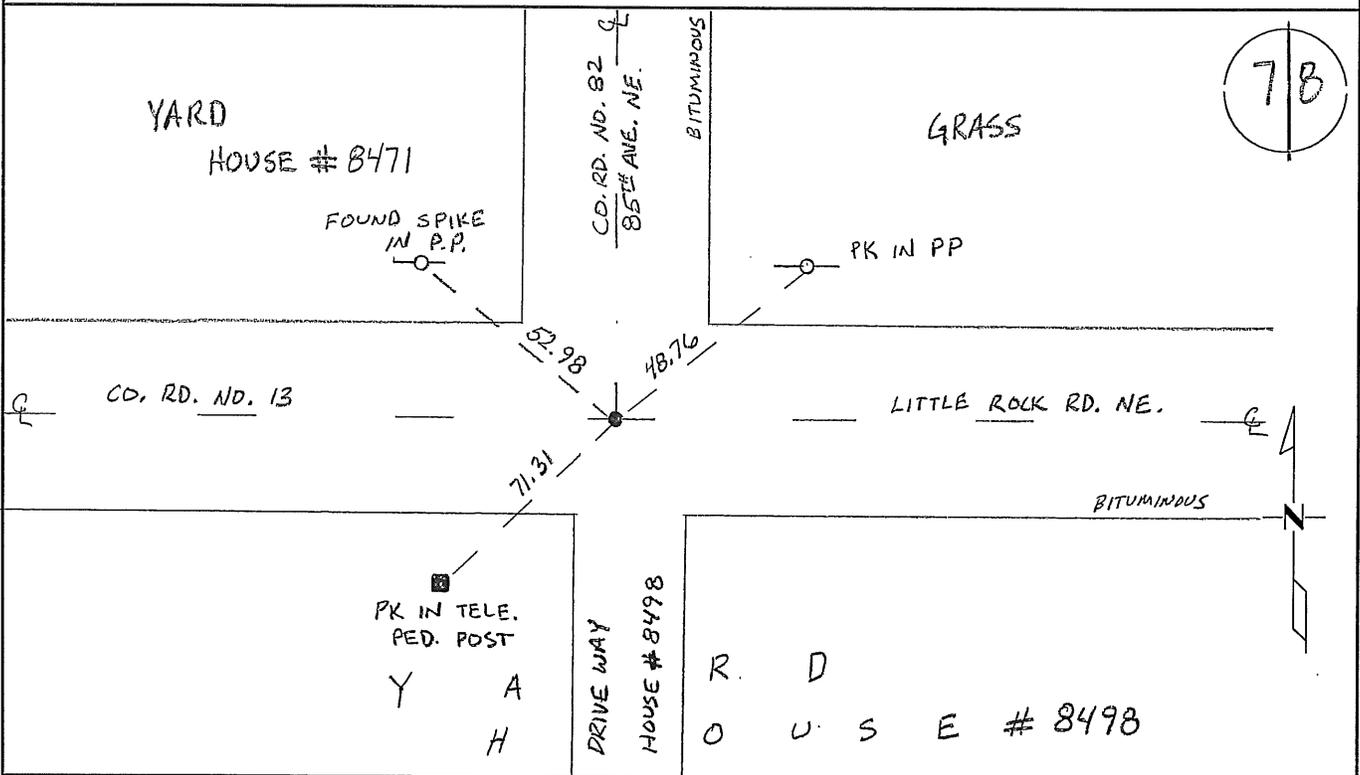

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oly
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

H073

East Quarter Corner of Section 7, Township 37 North, Range 29 West, Gilmanton Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey established corner marked with a wood post with bearing trees noted as:
- | | | |
|------------|--------|----------|
| 9" Blk Ash | S 18 E | 28 links |
| 9" Maple | S 58 W | 22 links |
- 1892 County Road Book, page 71, shows road laid by out Felix Parent on east-west ¼ line.
- 1932 County Engineer's notebook No. 73 contains a road survey by H. G. Elletson for SAR No. 13. Corner is shown in 4-way road intersection with ties:
- | | | |
|---------------|----|------|
| Elm | SE | 57.5 |
| NE Cor. Store | SW | 49.4 |
- 1933 County Engineer's Notebook No. 72 contains survey of County road running north from this corner. Ties:
- | | | |
|---------------------|----|-------|
| NE Cor. Store Found | SW | 49.4' |
| PP | NE | 52.4' |
- (Notation in 1963 shows these ties.)
- 1956 County Surveyor's Record Book 1, page 473, shows ties:
- | | | |
|---------------|----|------|
| NE Cor. Store | SW | 49.4 |
| PP | NW | 54.0 |
- 1959 County Engineer's Notebook No. 209 contains a road survey for CSAH No. 13 running east from this corner. Corner is shown as a hub set in 4-way road intersection with same ties as above.
- 1978 Ronald Engelmeyer, LS 13334, set a RR spike for the corner in intersection of roads north, east, and west. He filed a Certificate of Location (Doc. No. 151561) and shows a distance of 2652.53 feet south to the SE corner of Section 7.
- 2008 The County Surveyor's Office searched and found the RR spike as set by Ron Engelmeyer in 1978. Distance to the SE Corner measures 2652.43 ft. A tie to a PP NW measured 52.98 ft., which may be the same PP as referenced in 1956 (54 ft.). The tie to the NE Cor. Store referenced in 1933 was not found. The position falls on centerline of an east-west bituminous road (County Road 13) and centerline of a bituminous road to the north (County Road 82). The Surveyor accepts the position as the best evidence and set ties to same.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-156133.556
 E-516227.209

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 7, Township 37, Range 29, _____ P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 7-12-78 found a _____ evidenced by C-line of Roads North, East, West
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a Railroad Spike
DATE

SKETCH OF REFERENCE TIES



refer to next page

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald Engelmeier _____
SIGNATURE DATE

Registration No. 13334

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 9 9 .M. on the 21 day of February A.D., 1979

Register of Deeds F.A. Johnson

County Recorder, Deputy


DOCUMENT NO. 151561

64-70
156-78

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 12 day of JULY, 1978
I did RESTORE the EAST QUARTER corner of Section 7,
Twp. 37, Rg. 29, BENTON COUNTY County, Minnesota, which
was evidenced by C-LINE OF ROADS NORTH, EAST, WEST

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of a RAILROAD SPIKE and that
I did establish witness or reference monuments as shown below:

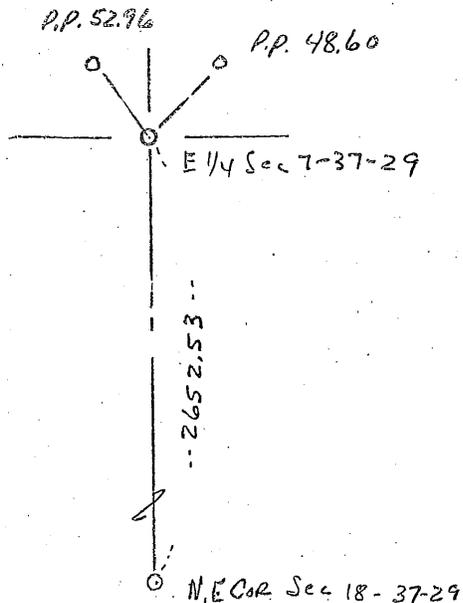

151561

I hereby certify that the
above is true and correct
and that I am a registered
Land Surveyor under the laws
of the State of Minnesota.

[Signature]
Minn. Registration No. 13334

Office of the Register of Deeds,
Benton County, Minn.

I hereby certify that the within
instrument was filed for record
in this office on the 21st day of
February, 1979. 9 a.m.

F. A. Johnson
Register of Deeds County Recorder
By _____ Deputy.