

A 361517

Certified, Filed and or Recorded on
Nov. 05, 2008 AT 08:35AM


Signed: [Signature]
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 13, Township 37N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 22 OCT 2008 found a PK NAIL & BENTON COUNTY WASHER
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

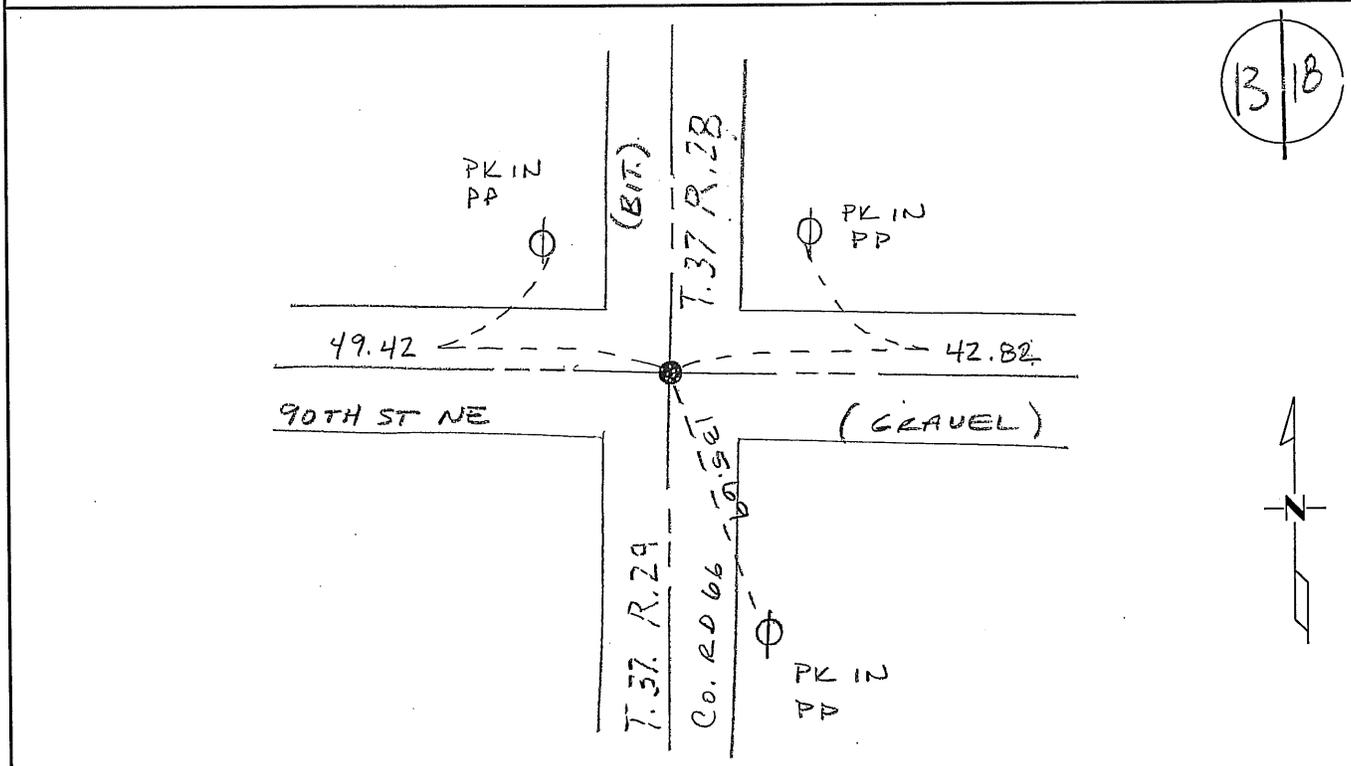

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy Benton County Surveyor
License No. 45872

Date: 11/04/2008

Benton County Surveyor's Office
Jason W. Oberg, Deputy County Surveyor
Minnesota License No. 45872
Page 1 of 2

Statement of Evidence:

H133

East Quarter Corner of Section 13, Township 37 North, Range 29 West, Gilmanton Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

- 6" Ironwood N 32 W 26 links
- 6" Ironwood S 67 1/2 E 17 links

A line tree was noted as a 12" Sugar North 21.22 chains.

1901? County Surveyor's Record Book 1, page 485, and Record Book A, Map No. 34, shows a survey by John Whilt, which notes a distance of 40.29 chains to both the NE and SE corners Sec 13 (indicating corner set lost). Corner marked by Iron stake with ties:

- 2" Oak NE 51.4'
- Cor F.P. SW 36.4'

1912 County Surveyor's Record Book 1, page 383, notes the following reference ties:

- Cor Post E 34
- Cor Post NW 36.3

1912 County Engineer's Notebook No. 2, pages 49 and 50, contains a road survey for SR No. 14 by M. J. Cleveland. Survey runs north-south on section line. Found corner on west side of rock with same ties as listed above. Stationing gives distances of 2659 feet to the SE corner and 2665 feet to the NE corner of Section 13.

1915 County Surveyor's Record Book 2, page 420 and 421, and Record Book A, Map No. 15, shows survey of Section 18 by J.P. Soderstrum, which notes that he found old wood stake that was set by M.J. Cleveland. This point was within 6 feet of old Gov't corner according to testimony. Distance of 74.84 chains (4939.44 feet) is given to East 1/4 corner of Section 18.

1941 County Engineer's Notebook No. 152 contains a road survey for CAR 32 running south to north on township line. Corner is shown as an iron. Ties:

- G.P NE 52.4'
- TP SE 53.2'

Stationing gives distances of 2658.7 feet to the SE corner and 2667.6 feet to the NE corner of Section 13.

1953 Notation in notebook No. 152 gives updated ties to hub:

- PP NE 43.4'
- TP SE 58.7'

1963 County Surveyor's Record Book 1, page 185 notes an Iron and the following reference ties

- TP SE 59.8
- PP NE 44.0
- PP NW 45.05
- TP SW 48.4

(Ties also noted in notebook No. 152 to found corner-placed iron over post.)

1979 William Lunser, LS 9394, found a 3/8" Iron Pin.

1988 William Lunser replaced the 3/8" Iron Pin with a cast iron monument and filed a Certificate of Location (#191271). He notes a distance of 4940.07 feet to the East 1/4 corner Sec 18 in Maywood Township and a distance of 2659.82 feet to the SE corner Sec 13.

A 361517

Benton County Surveyor's Office
Jason W. Oberg, Deputy County Surveyor
Minnesota License No. 45872
Page 2 of 2

- 2008 The County Surveyor's Office searched and found a PK nail with a Benton County disk flush with the bituminous surface at the intersection of the centerline of east-west gravel road (90th Street N.E.) and the centerline of north-south bituminous road (County Road No. 66). Position gives distance to the NE corner as 2668.32 feet, the SE corner as 2659.84 feet, which agrees with distances as noted by Cleveland in 1912 of 2665 feet and 2659 feet respectively. The distance of 4939.95 feet to the E ¼ of Section 18 agrees with the 1915 survey of 4939.44 feet. The Surveyor accepts the position and updated ties.

County Coordinates to PK nail by GPS
NAD 83 (1996 Adjustment)
N-151151.879
E-542413.808

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 13, Township 37, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 9-19-79 found a 3/8" iron pin
DATE

left monument as found, lowered monument, removed monument (explain)

On 12-8-88 placed a Benton County Cast Iron Monument
DATE

SKETCH OF REFERENCE TIES

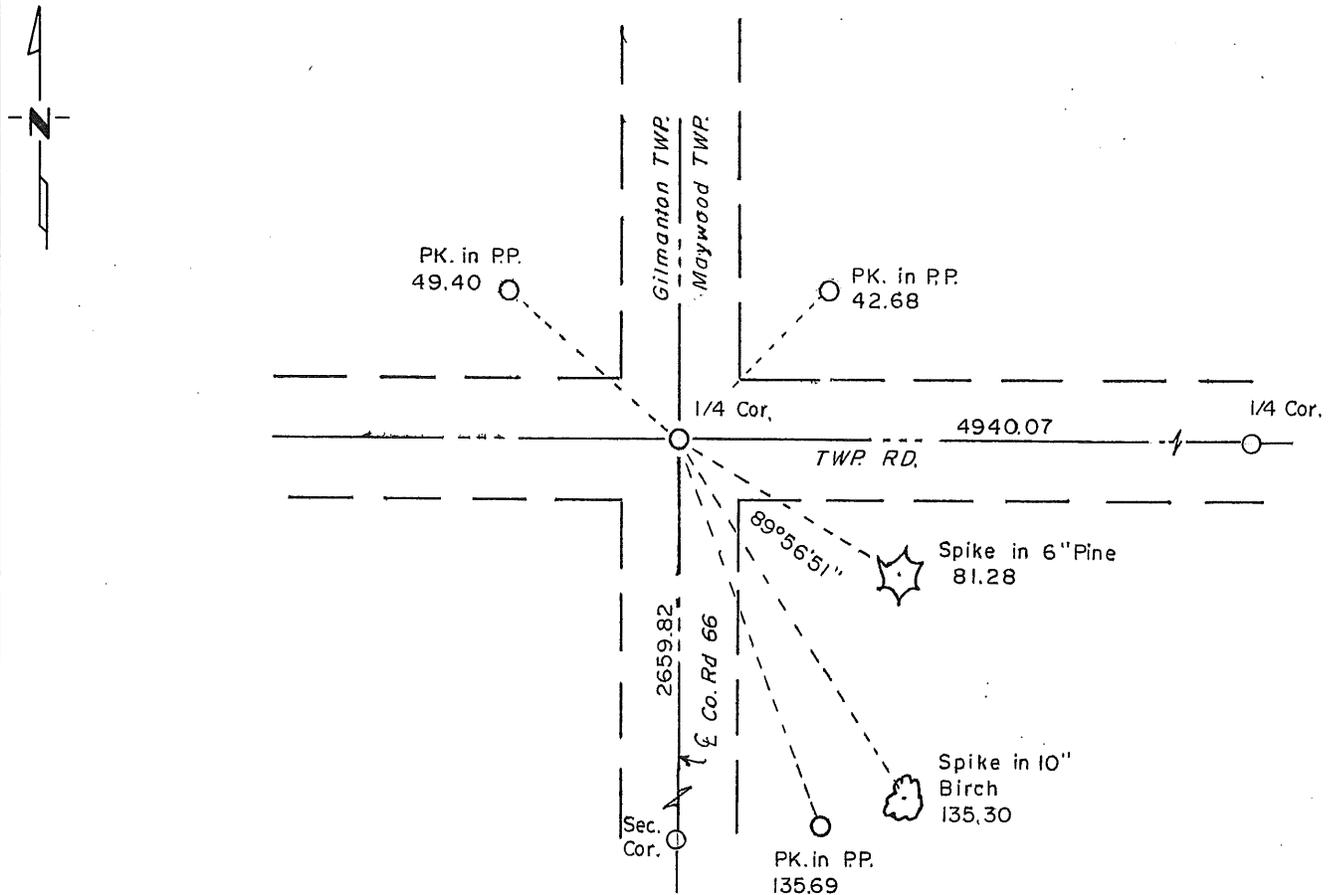

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Linn 12/15/88
SIGNATURE DATE

Registration No. 9394

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

9-19-79 Found 3/8" iron pin at the intersection of two roads. Measurements taken to the east and south verified this location.

12-8-88 Found 3/8" iron pin as located in 1979 and replaced it with a Benton County Cast Iron Monument.

191271

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 12 09 PM '89

ALICE G. ENGELMEYER
COUNTY RECORDER

BY Jew DEPUTY