

Certified, Filed and or Recorded on  
Dec. 24, 2008 AT 08:41AM


Signed: BW  
MARILYN J NOVAK  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 14, Township 37N, Range 29W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_
- left monument as found       lowered monument       removed monument (explain)
- On 10/29/08 placed an 1/2" IRON PIPE CAP #19552 DOWN 0.3'

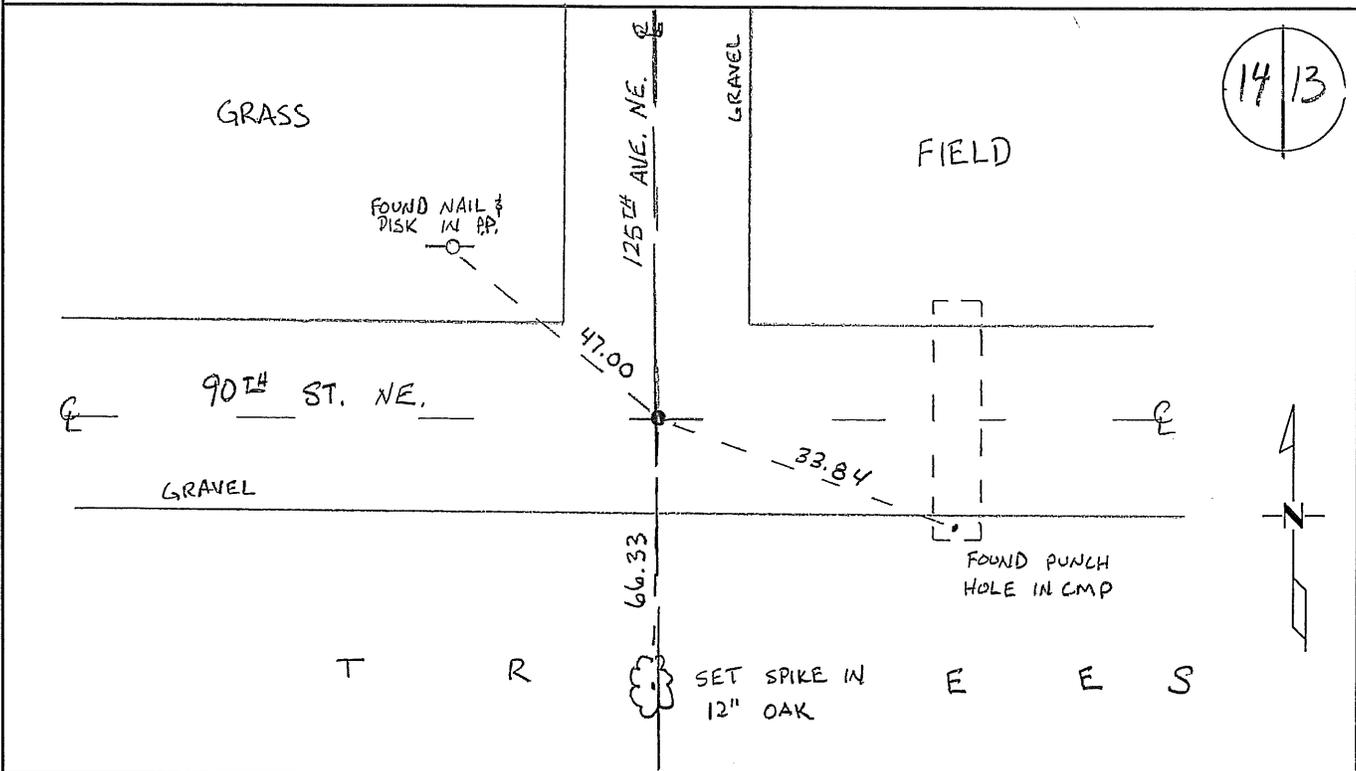

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oley  
Deputy Benton County Surveyor  
License No. 45872

Date: 12/19/2008  
PAGE 1 OF 2

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

Statement of Evidence:

H143

East Quarter Corner of Section 14, Township 37 North, Range 29 West, Gilmanton Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

10" Sugar	N 89 ½ W	28 links
12" Sugar	S 86 ½ E	43 links

1901? County Surveyor's Record Book 1, page 486, notes a 1" square narrow pin marking the corner with the following reference ties

10" W Elm	S 63 E	53 ½ links
6" W Elm	N 69 W	103 ½ links

County Surveyor's Record Book A, Map No. 34, contains a survey by John Whilt of Section 13 which gives a distance of 40.65 chains to both the NE and SE corners of Sec. 14. (Indicating it was set lost).

1972 County Engineer records: Kotsmith notes the following reference ties:

Steel FP	SW	41.4
Mailbox	NW	47.6
FP	SE	31.8

1993 David Regan, LS 12236, set a ½" I.M. on the centerline of a road east/west/north. He filed a Certificate of Location (#231251).

2008 The County Surveyor's Office searched and found a ½" iron pipe with cap number 19552 at the intersection of an east-west gravel road (90<sup>th</sup> St. NE) and a gravel road to the north (125<sup>th</sup> Ave NE). The position gives a tie to the NE and SE Corners of 2681.63 ft. (40.63 ch.) and 2700.21 ft. (40.91 ch.). Corner falls 4.55 ft. west of a straight line. Compared to Whilt's measurements, the tie to the NE Corner agrees (within 0.02 ch.), while the SE Corner measures about 17.16 ft. (0.26 ch.) long. The Surveyor accepts the position based upon occupation and set ties to same.

County Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-151057.391  
 E-537253.317

A 361677

Certified, Filed and or Recorded on  
Nov. 07, 2008 AT 02:23PM


Signed: [Signature]  
MARILYN J NOVAK  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 14, Township 37N, Range 29W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_
- left monument as found       lowered monument       removed monument (explain)
- On 10/29/08 placed an 1/2" IRON PIPE CAP #19552 DOWN 0.3'

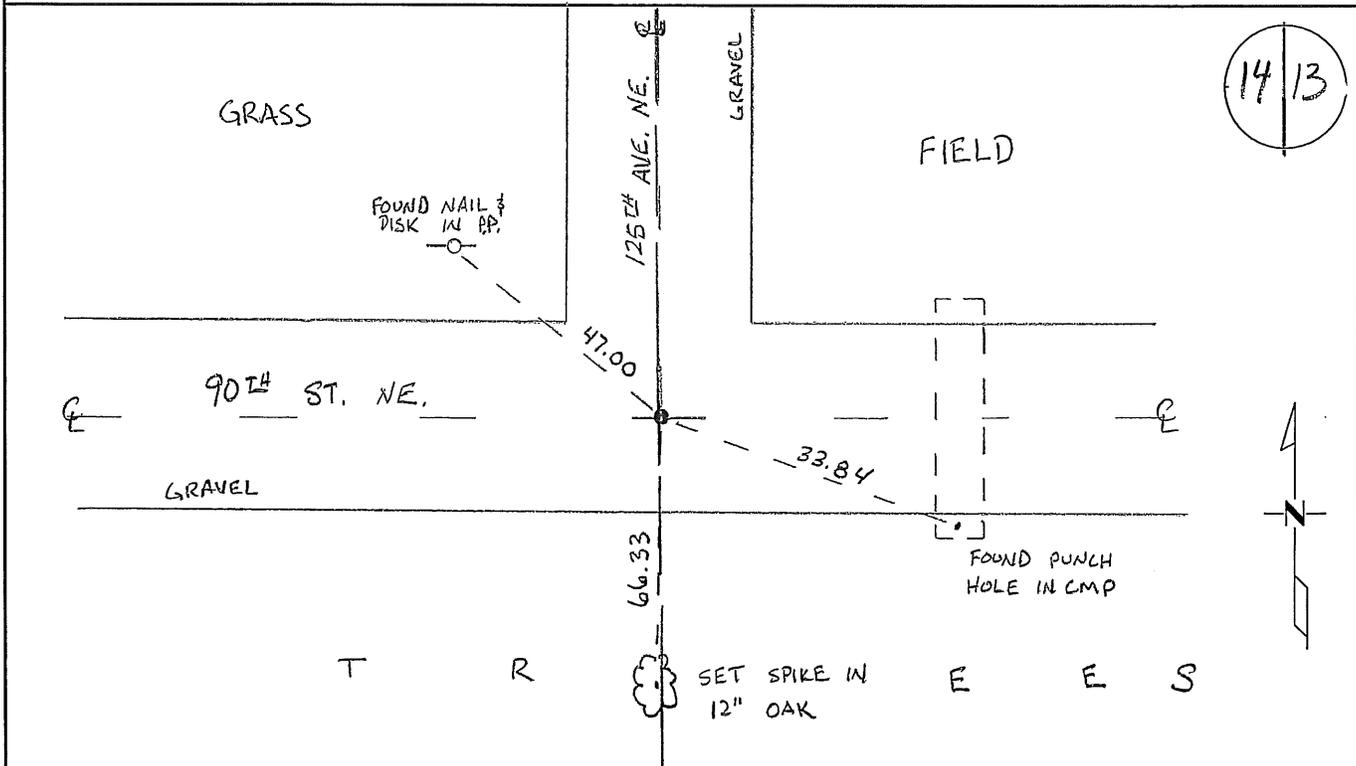

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]  
Deputy Benton County Surveyor  
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

H143

East Quarter Corner of Section 14, Township 37 North, Range 29 West, Gilmanton Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

10" Sugar	N 89 ½ W	28 links
12" Sugar	S 86 ½ E	43 links

1901? County Surveyor's Record Book 1, page 486, notes a 1" square narrow pin marking the corner with the following reference ties

10" W Elm	S 63 E	53 ½ links
6" W Elm	N 69 W	103 ½ links

County Surveyor's Record Book A, Map No. 34, contains a survey by John Whilt of Section 13 which gives a distance of 40.65 chains to both the NE and SE corners of Sec. 14. (Indicating it was set lost).

1972 County Engineer records: Kotsmith notes the following reference ties:

Steel FP	SW	41.4
Mailbox	NW	47.6
FP	SE	31.8

1993 David Regan, LS 12236, set a ½" I.M. on the centerline of a road east/west/north. He filed a Certificate of Location (#231251).

2008 The County Surveyor's Office searched and found a ½" iron pipe with cap number 19552 at the intersection of an east-west gravel road (90<sup>th</sup> St. NE) and a gravel road to the north (125<sup>th</sup> Ave NE). The position gives a tie to the NE and SE Corners of 2681.63 ft. (40.63 ch.) and 2700.21 ft. (40.91 ch.). Corner falls 4.55 ft. west of a straight line. Compared to Whilt's measurements, the tie to the NE Corner agrees (within 0.02 ch.), while the SE Corner measures about 17.16 ft. (0.26 ch.) long. The Surveyor accepts the position based upon occupation and set ties to same.


County Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-151057.391  
 E-537253.317

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter \_\_\_\_\_ Corner of Section 14, Township 37, Range 29, 4th P.M.  
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 8/26/93 placed a 1/2" Iron monument on centerline of gravel roads  
DATE  
East-West and North

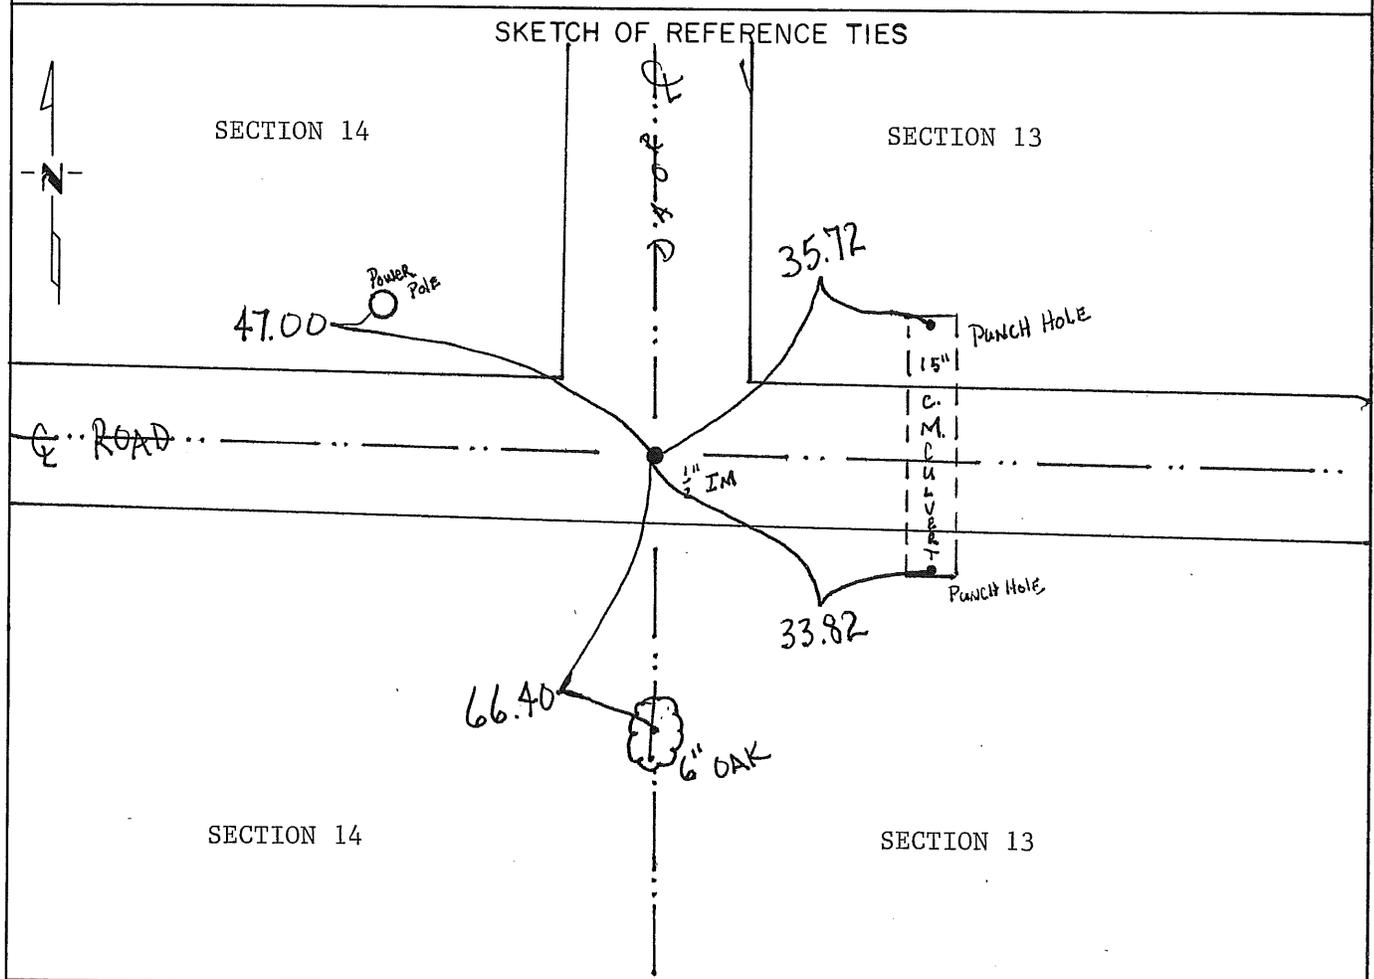

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David G. Regan 3/27/95  
SIGNATURE DATE

Registration No. 12236

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

The G.L.O. survey was done in 1855 by Oscar Davis.

The County Surveyors records were searched with no reference to this corner.

On 8/93, Regan Land Surveyors, Inc. searched and dug the area, then set a ½" iron monument and made ties.

231251

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

OCT 20 3 03 PM '95

ALICE G. ENGELMEYER  
COUNTY RECORDER

BY *MM* DEPUTY *X*