

Certified, Filed and or Recorded on
Nov. 06, 2008 AT 08:49AM


Signed: CK
MARILYN J NOVAK G V T
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 18, Township 37N., Range 29W.
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/20/2008 found a 1/2" IRON PIPE AT CENTERLINE OF OLD TOWNSHIP ROAD AND OLD DOWN FENCELINE EAST - WEST.
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

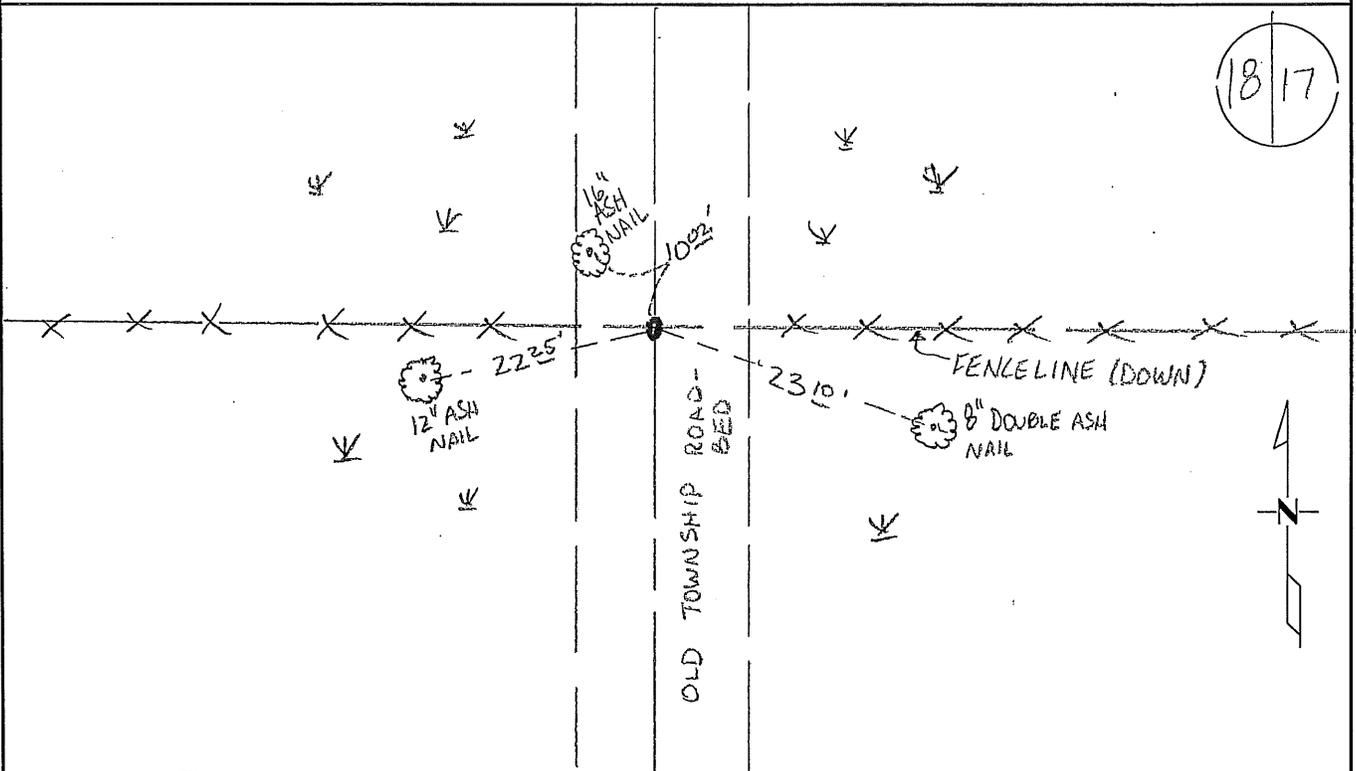

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oly
Deputy Benton County Surveyor
License No. 45872

Date: 11/03/2008

Benton County Surveyor's Office
 Gary H. Stevenson, County Surveyor
 Minnesota License No. 12684

Statement of Evidence:**H183**

East Quarter Corner of Section 18, Township 37 North, Range 29 West, Gilmanton Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked with a wood post with bearing trees noted as:

9" Elm	S 50 E	20 links
12" W Ash	S 38 W	41 links

1980 Paul Wellen, LS 10461, noted corner at fence lines east-west and old road north-south with ties:

8" Twin Ash	NE	44.73'
8" Ash	SW	22.56'
8" Ash	W	10.14'

Measured 2646.01 feet to the NE corner of Section 18.

1994 David Regan, LS 12236, found a ½ " iron pipe lying over in swampy area on centerline of old township roadbed north-south and fence lines east-west. He straightened iron and filed a Certificate of Location (Doc. No. 1231250). (Tie to Ash SW is 22.38', which could be Wellen's tie).

2002 No resurvey information was found on this corner in the Benton County records.

2008 The County Surveyor's Office searched and found a ½" iron pipe as the same was reported by Regan in 1994. Distance to the NE Cor. measured 2646.73 ft., which agrees with Wellen's measurements in 1980. Ties were updated.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-150835.960
 E-516098.765

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter _____ Corner of Section 18, Township 37, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 8/18/94 found a 1/2" Iron pipe lying over in swampy area on centerline of old township roadbed and on fence line East-West. Straightened and tied.
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

SKETCH OF REFERENCE TIES

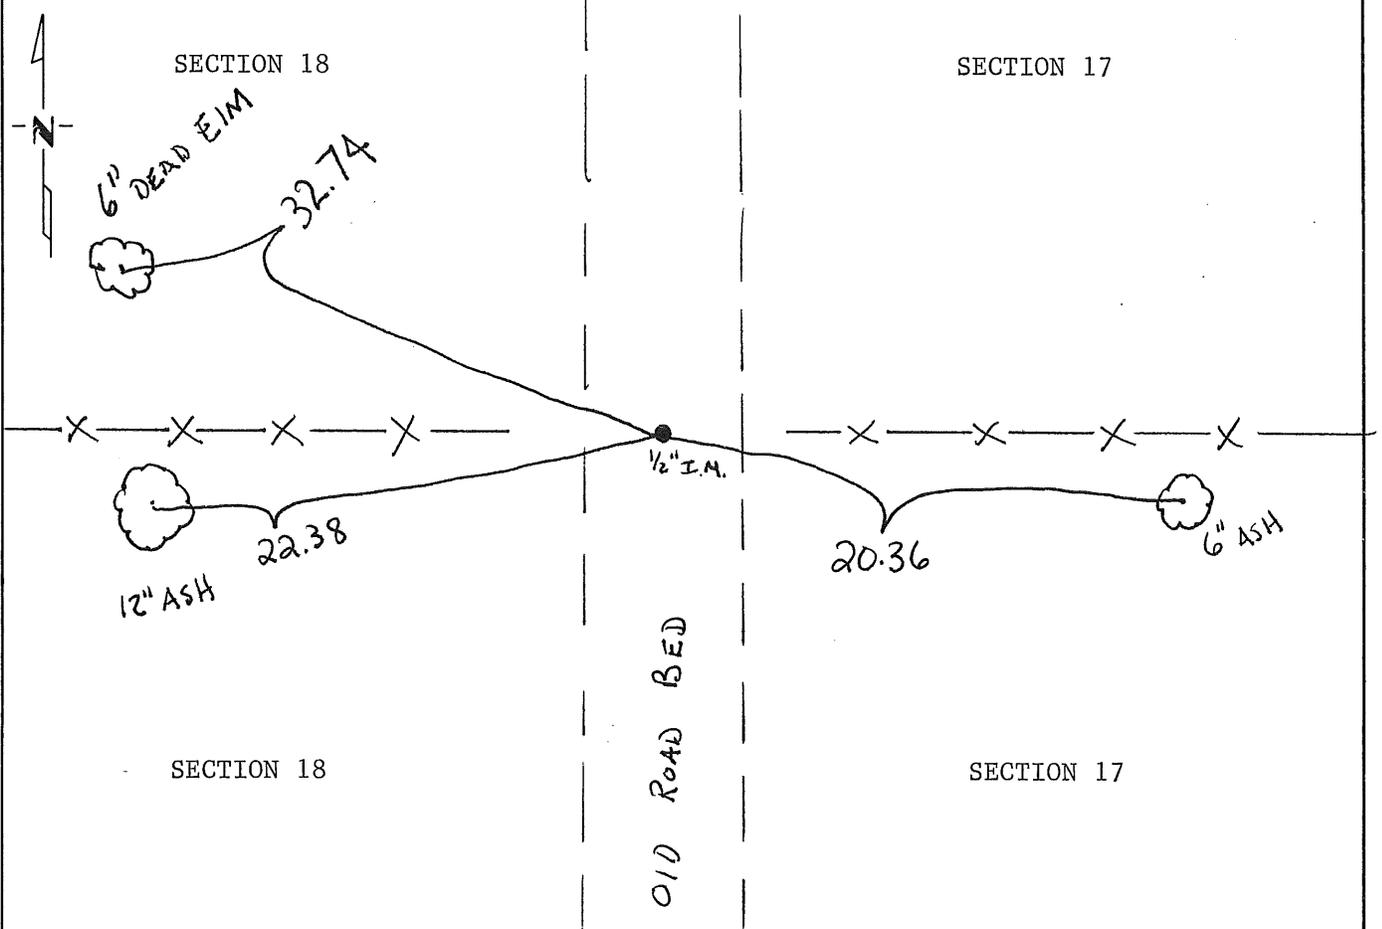

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David G. Regan 3/27/95
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The G.L.O. survey was done in 1855 by Oscar Davis.

The county Surveyors records were searched with no reference to this corner.

On 8/94, Regan Land Surveyors, Inc. searched the area and found a 1/2" iron monument lying over in swampy area, dug out were iron went into ground and straightened the iron ,then made ties.

231250

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

OCT 20 3 02 PM '95

ALICE G. ENGLEMEYER
COUNTY RECORDER

BY Man DEPUTY FOR