

Certified, Filed and or Recorded on
Nov. 07, 2008 AT 02:27PM

Signed: [Signature]
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 20, Township 37N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10/29/08 found a PK NAIL IN BITUMINOUS ROAD

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

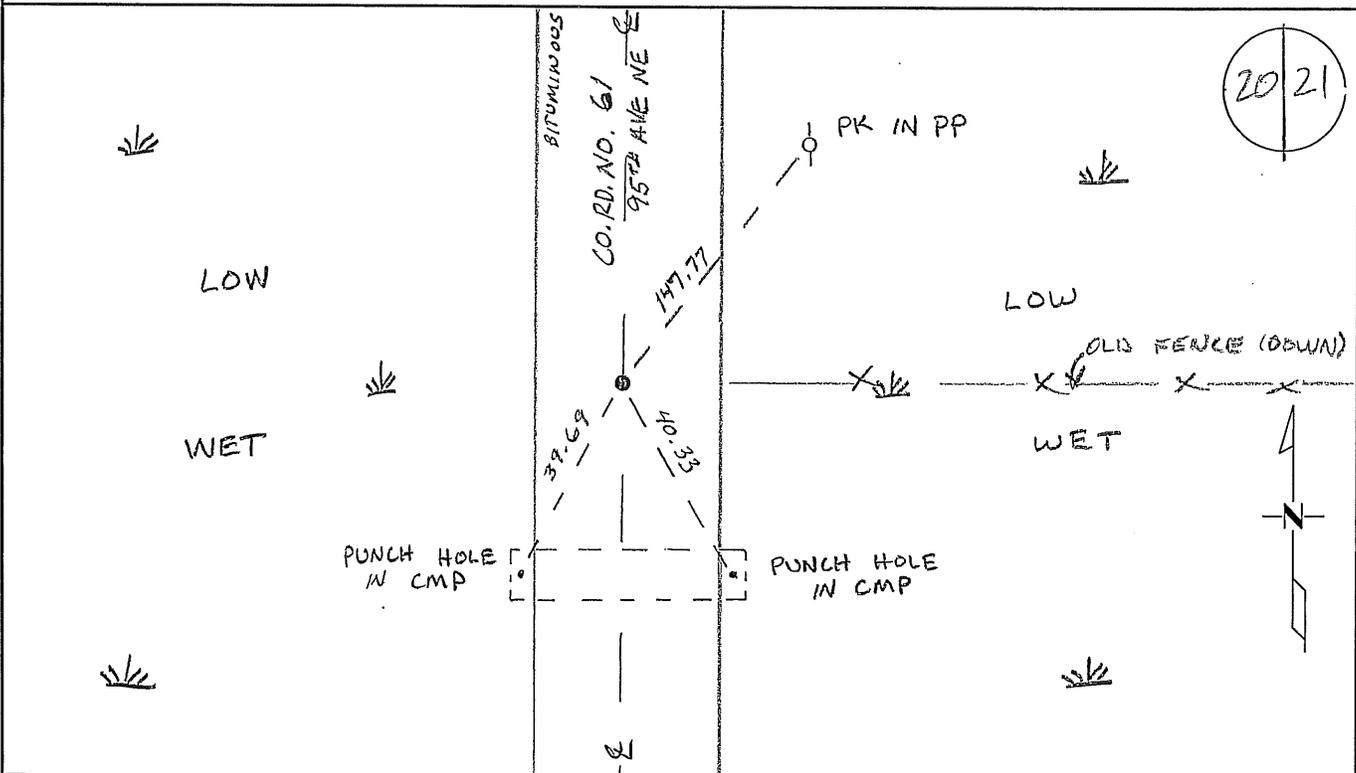

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

PAGE 1 OF 2

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

H203

East Quarter Corner of Section 20, Township 37 North, Range 29 West, Gilmanton Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked with a wood post with bearing trees noted as:

6" Tamarack	N 50 1/4 E	8 links
10" Tamarack	S 61 1/2 W	20 links

1949 County Highway Engineer's Notebook No. 169 contains road survey for CAR 37 running from south to north on the section line. Corner is shown marked by a hub set in the center of road with fence line east. Ties are same as listed below. Stationing gives distances of 2666.3 feet to the SE corner and 2671.6 feet to the NE corner with corner being a POT.

1949 County Highway information by H. G. Elletson notes the following reference ties to a hub:

24" Elm	NE	197.2
3 rd FP	E	48.1

2008 The County Surveyor's Office searched and found a PK Nail on centerline of a north-south bituminous road (County Road 61) and on line with an old fence line running east. Position gives 2669.32 ft. to the SE Cor. and 2667.32 ft. to the NE Cor. for an overall distance for the east line of 5337.19 ft, which is very close to the overall distance of the east line per 1949 at 5337.9 ft. Proportionate position to 1949 dimensions places the corner 3.37 ft. south of its current position. However, given the agreement with the east fenceline, the surveyor accepts the Nail position as the best occupational evidence and set ties to same.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-145668.374
 E-521325.803