

A 361521

Certified, Filed and or Recorded on
Nov. 05, 2008 AT 08:39AM


Signed: [Signature]
MARILYN J NOVAK 6 V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 24, Township 37N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 22 OCT 2008 found a PK NAIL / COUNTY WASHER AT CENTERLINE
NORTH / SOUTH ROAD AND FENCE EAST
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

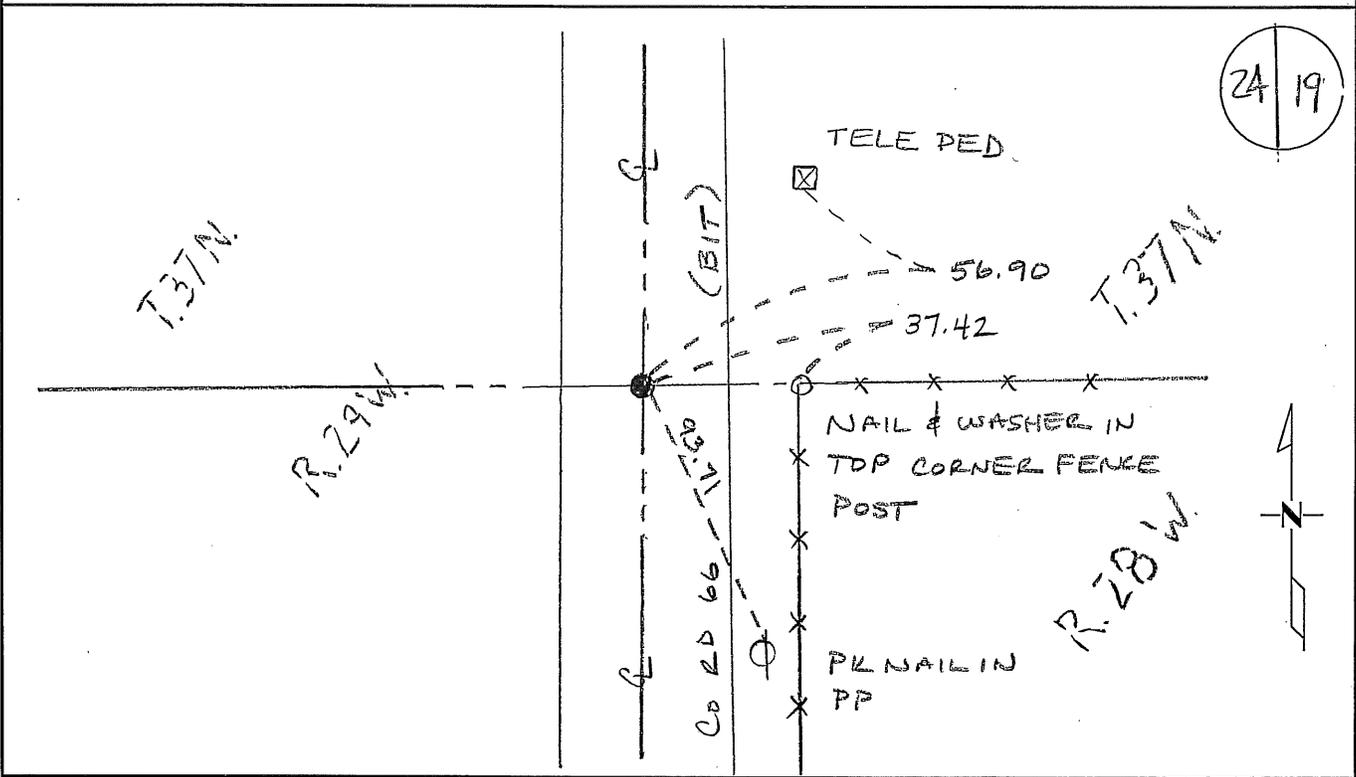

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy Benton County Surveyor
License No. 45872

Date: 11/04/2008

PAGE 1 OF 2

Statement of Evidence:**H243**

East Quarter Corner of Section 24, Township 37 North, Range 29 West, Gilmanton Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded:
- | | | |
|--------------|--------|----------|
| 16" Basswood | N 17 E | 4 links |
| 14" Maple | S 4 W | 20 links |
- 1939 County Engineer's Notebook No. 131 contains survey of CAR 32 running south to north on township line. No corner is shown, but stationing gives distances to fence line east of 2679.7 feet to the SE corner and 2675.2 feet to the NE corner.
- 1993 David Regan, LS 12236, set a ½" I.M. on the centerline of a road north/south and a fence line east. He filed a Certificate of Location (#231247). Survey information gives distances of 2662.09 feet to the SE corner and 2693.38 feet to the NE corner.
- 2005 Danny Kron, LS , found ½" iron pipe that fit Regan's ties and used corner for breakdown of Section 24. Corner is accepted as marking the obliterated corner position.
- 2008 The County Surveyor's Office searched and found a PK nail with a Benton County disk flush with the surface at the centerline of north-south bituminous road (County Road No. 66) and on line with an east fence line. Position gives distance to the NE and SE corners as 2693.55 feet and 2662.27 feet respectively, which agrees with Regan's 1993 distances to same of 2693.38 feet and 2662.09 feet. Surveyor accepts position and updated ties.

Coordinates to PK nail by GPS
 NAD 83 (1996 Adjustment)
 N-145798.496
 E-542407.167

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter _____ Corner of Section 24, Township 37, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 3/25/93 placed a $\frac{1}{2}$ " Iron monument in centerline of North-South
DATE road and fence line East

SKETCH OF REFERENCE TIES

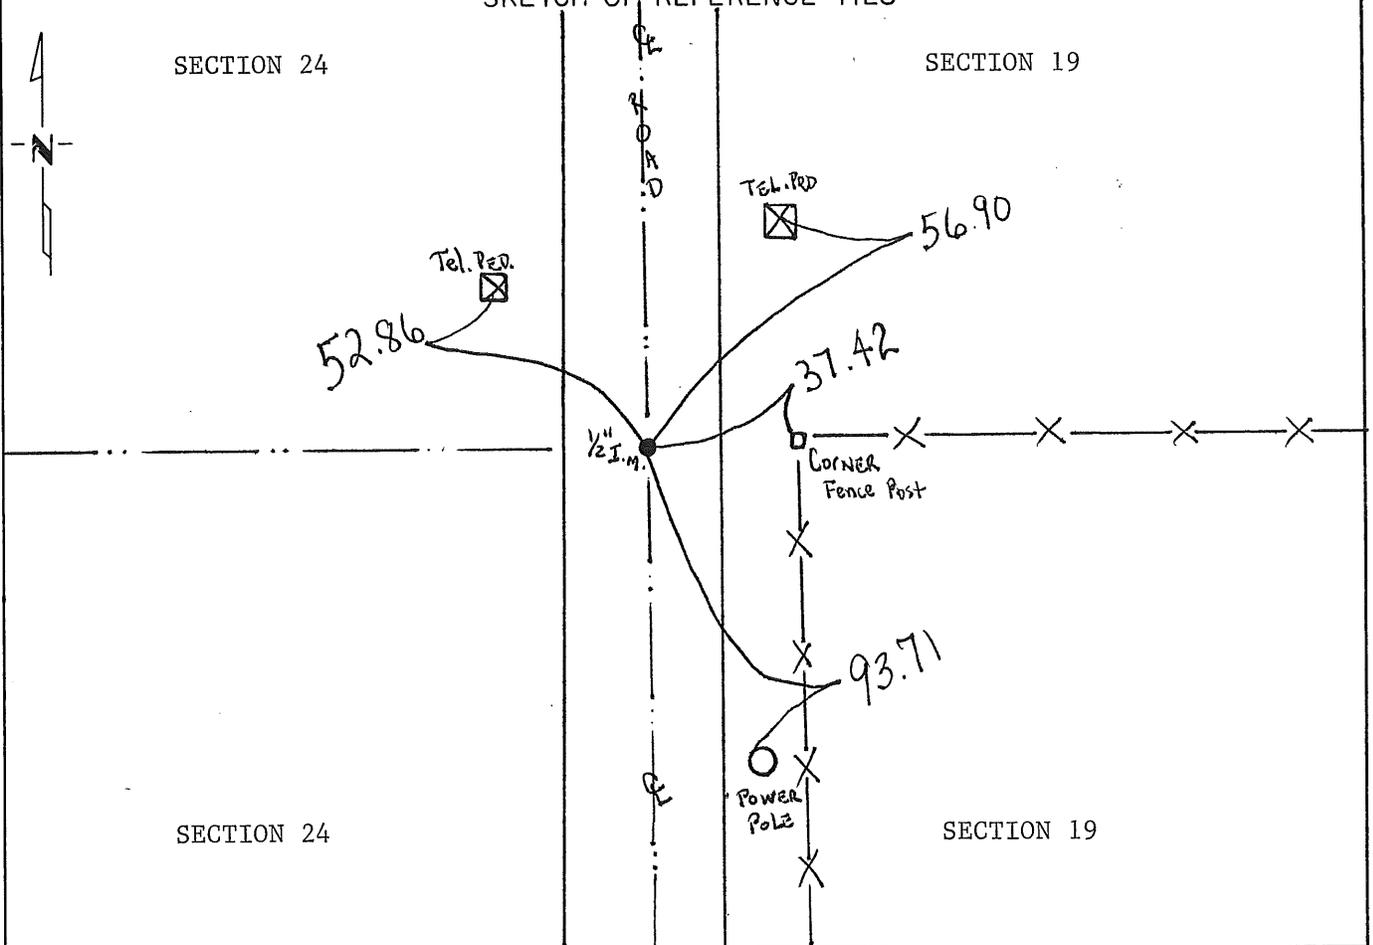

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Regan 3/27/95
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The G.L.O. survey was done in 1849 by Theodore Conkey.

The County Surveyors records were searched with no reference to this corner.

On 3/93, Regan Land Surveyors, Inc. searched and dug the area. A 1/2" iron monument was set on centerline of road and fence line East.

231247

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

OCT 20 3 02 PM '95

ALICE G. ENGELMEYER
COUNTY RECORDER

BY Mm DEPUTY xm