

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST 1/4 Corner of Section 25, Township 37N, Range 29, 4TH P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 29 AUG 1988 found a IRON IN PLACE IN BITUMINOUS; DUG DOWN 4 FEET
DATE AND FOUND NOTHING ELSE.

left monument as found, lowered monument, removed monument (explain)

On 29 AUG 1988 placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

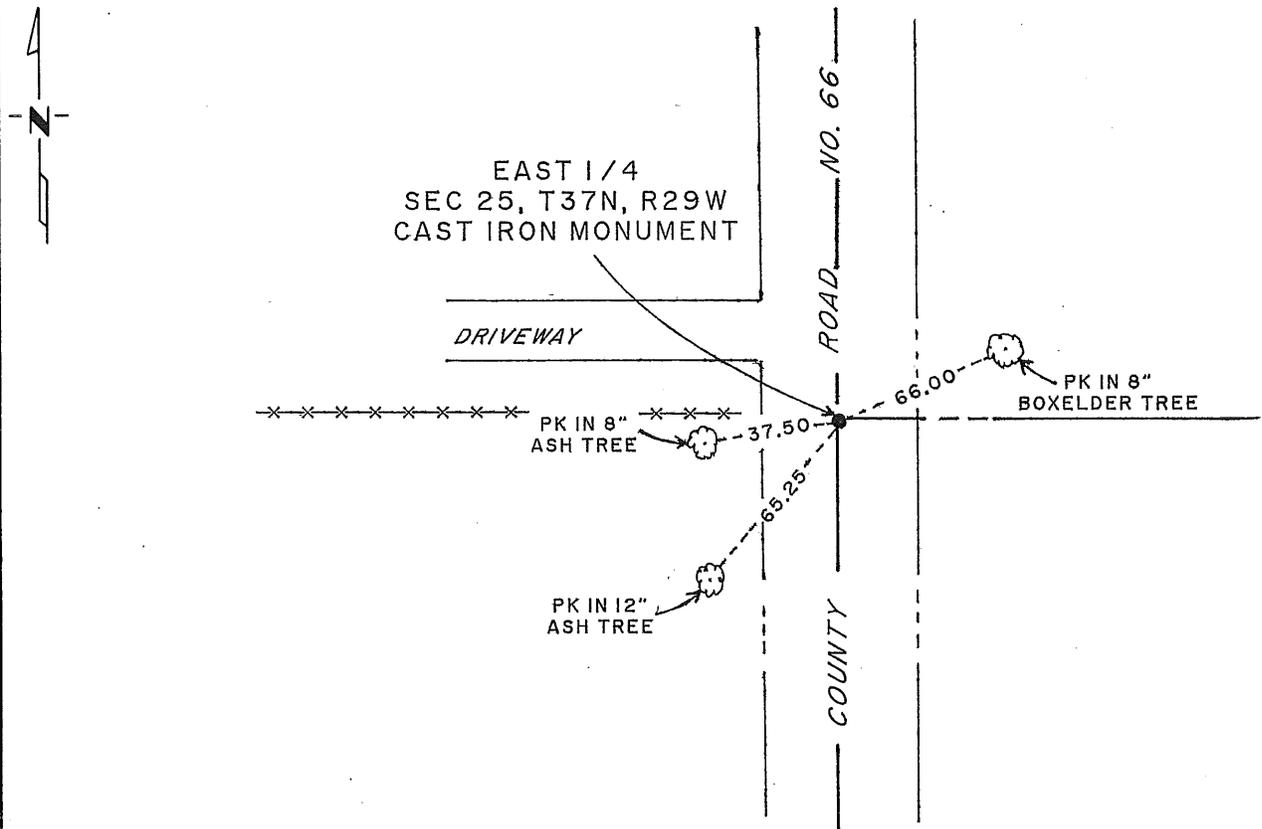

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Skipton SIGNATURE 12-20-88 DATE

Registration No. 17768

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

EAST QUARTER CORNER, SECTION 25, T37N, R29W, 4TH P.M.

1. During the G.L.O. Survey of 1855, Mr. Oscar F. Davis, a U.S. Deputy Surveyor, set a wood post to mark this corner.
2. Benton County's old surveyor's books indicated an iron with reference ties in 1963.
3. On August 29, 1988, Paul E. Wellen & Associates Inc., found an iron in place at the location of said corner. The 1963 reference ties were no longer in place. We dug with a backhoe, below said iron, 4.0 feet below the existing bituminous road surface and found nothing else. We lowered said iron and placed a cast iron monument over it.

19 | 337

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 20 9 01 AM '89

ALICE G. ENGELMEYER
COUNTY RECORDER

BY Ch DEPUTY

3