

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 26, Township 37 N, Range 29 W, 4TH P.M.


STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 12-22-86 placed a 3/4" IRON PIPE WITH R.L.S. 17768 CAP
DATE

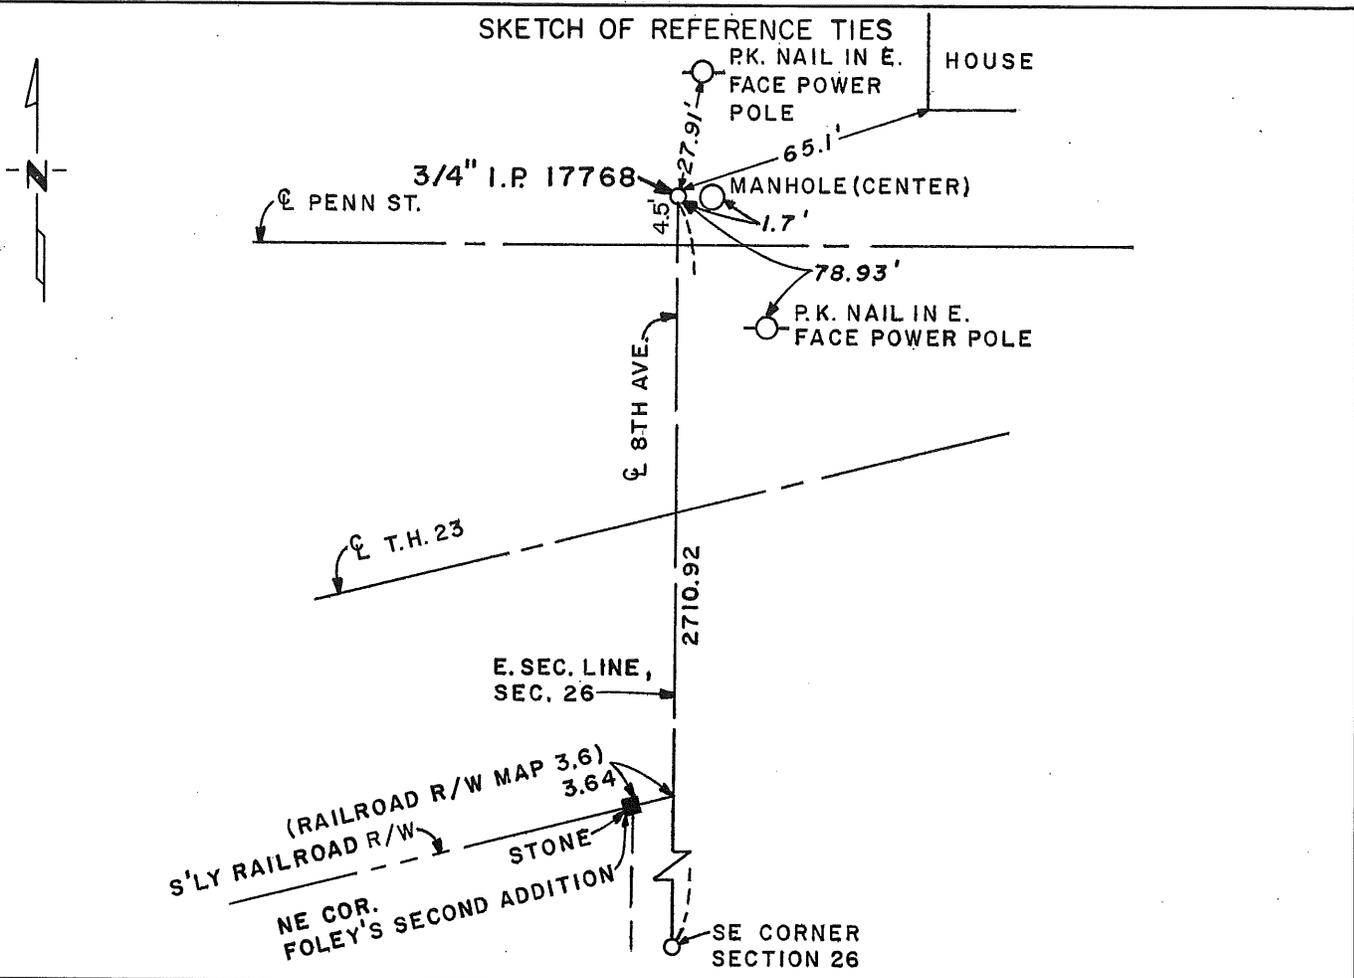

Statement of evidence relative to this corner location is on back of page. **181316**

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Skipton 1-20-87
SIGNATURE DATE

Registration No. 17768

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 9 .M. on the 2 day of February A.D., 19 87

County Recorder
Register of Deeds Alice C. Longmeyer

By [Signature], Deputy

DOCUMENT NO. Microfilmed 181316

Statement of Evidence:

1. Post set by U.S. Government Surveyors in July, 1855.
2. Iron Monument set at the northwest corner of PARK LOTS ADDITION denoting this position as the quarter corner between sections 25 and 26. Plat was surveyed by J.P. Sodeustrum in January 1915. Monument was shown in the centerline of the east-west public highway.
3. A monument was indicated at the northwest corner of PARK LOTS ADDITION on the plat of HOLDRIGE ADDITION surveyed by H.G. Elletson in November 1947. Monument was shown at the centerline of the east-west county road.
4. Field stone was found by C.H. West RLS 932 on April 6, 1949. Mr. West placed a 8" by 30" precast concrete monument with cap at this location. He established reference ties and filed certificate of replacing section corners. One reference tie remained today, which was used to perpetuate said corner. N.E. 65.1 feet to SW. corner of house foundation.
5. In March 1986, a field survey recovered the stone monument at the northeast corner of FOLEY'S SECOND ADDITION, said stone was also indicated on the Railroad right-of-way map as being 3.6 feet west on the east section line of Section 26. A stone monument on the intersection of the northerly right-of-way line of the Burlington Northern Railroad and the east line of PARK LOTS ADDITION, and the platted iron monument at the northeast corner Lot 7 of PARK LOTS ADDITION. The perpetuation of the east quarter corner and southeast corner of Section 26 were in harmony with found monuments recovered.

CERTIFICATE OF REPLACING SECTION CORNER

Corner to Sec. 26 T. 37N. R. 29W.

State of Minnesota }
County of Benton } ss.

I hereby certify that on 6th day of April 1949

I found the E 1/4 Corner to sec. 26 Twp 37N. Rge. 29W.
which was evidenced by a field stone

and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a
permanent marker consisting of a 8" x 30" precast concrete monument with cap.

I further certify that I established 3
reference or witness monuments consisting of 2 power poles & house and house foundation
which reference or witness monuments are located in the manner following:

North East 28.8 feet to copper disc in power pole. N.E. 65.1 feet to S.W.
corner of house foundation and S.E. 78.3 feet to copper disc in power pole.

Dated at St. Cloud Minn., this 3rd day of April 1950

James J. West
Surveyor Reg 932

OFFICE OF REGISTER OF DEEDS
County of Benton } ss.

I hereby certify that the within instrument was filed in this office for record on the 9th
day of Feb A. D. 1951 at 2 o'clock P. M.

Thomas Niedzielski
Register of Deeds

By Deputy