

Certified, Filed and or Recorded on
Nov. 06, 2008 AT 08:40AM

Signed: CK
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 13, Township 37N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10/21/2008 found a 1/2" IRON PIPE CAPPED "RLS 1236" 05' ABOVE
GROUND AT OLD FENCE LINE INTERSECTION (NORTH & EAST)

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

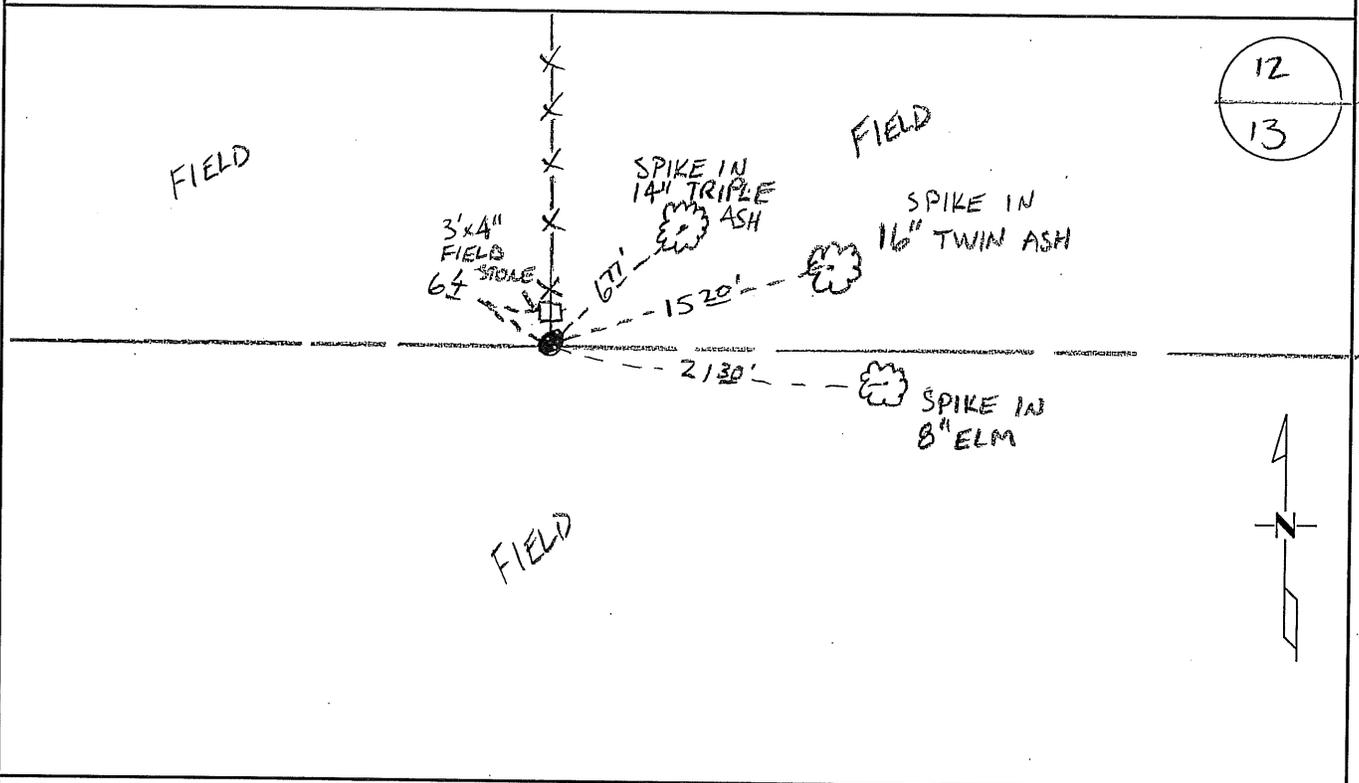

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 11/04/2008

Statement of Evidence:**H131**

North Quarter Corner of Section 13, Township 37 North, Range 29 West, Gilmanton Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked with a wood post with bearing trees noted as:

16" Blk Ash	N 49 W	33 links
7" Linden	S 37 W	21 links

1901? County Surveyor's Record Book 1, page 485, and Record Book A, Map No. 34, contains a survey by John Whilt. Survey gives a distance of 39.36 chains to the NE and NW corners of Sec 13 (indicating he set the corner lost).

1993 David Regan, LS 12236, set a ½" I.M. on the remains of an old fence line north/east. He filed a Certificate of Location (#231252).

2008 The County Surveyor's Office searched and found Regan's ½" iron pipe per 1993 Certificate of Location. Distance to the NE Cor. gives 2604.18 ft. (39.45 ch.) which agrees with Whilt's 1901 measurements of 39.36 chains. The NW Cor. of this Section was not known at the date of recovery, but a right of way iron found 33.00 ft westerly of the assumed position of the NW Cor. gives a distance from the N ¼ Cor. to the NW Cor. of 2597.31 ft. (39.35 ch.), which also is in harmony with Whilt's said 1901 survey. The Surveyor accepts Regan's iron and updated ties.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-153774.641
 E-539817.483


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter _____ Corner of Section 13, Township 37, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 8/26/93 placed a 1/2" Iron monument on remains of an old fence line
DATE to North and East

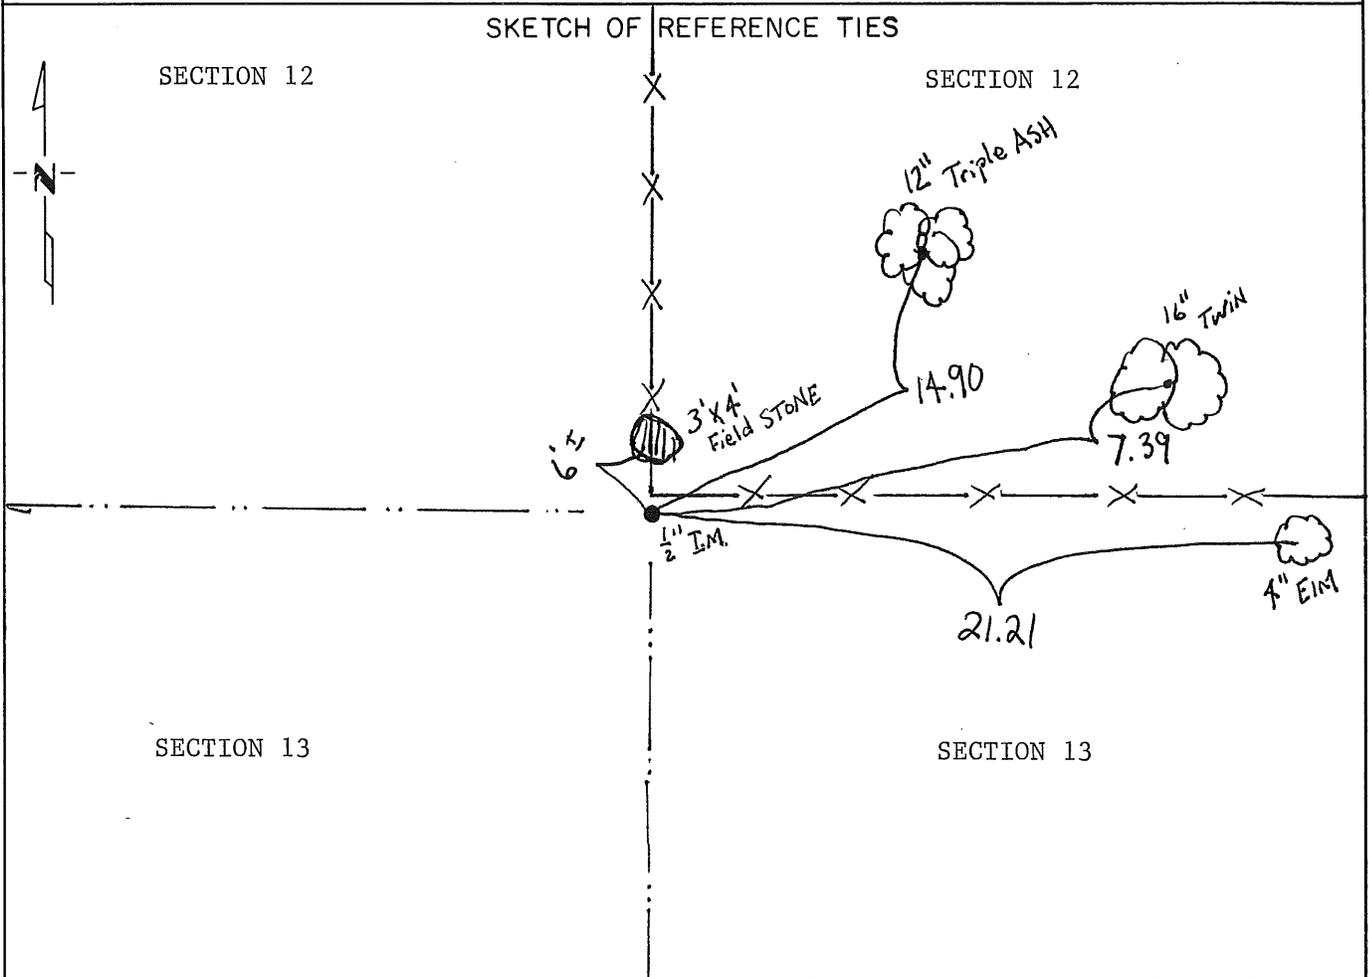

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David C. Regan 3/27/95
SIGNATURE DATE

Registration No. 12236
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ____

Register of Deeds _____
By _____, Deputy
DOCUMENT NO. _____

Statement of Evidence:

The G.L.O. survey was done in 1855 by Oscar Davis.

The County Surveyors records were searched with no reference to this corner.

On 8/93, Regan Land Surveyors, Inc. searched and dug the area, then set a 1/2" iron monument on remains of an old fence line North and East and made ties.

231252

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

OCT 20 3 03 PM '95

ALICE C. ENGELMEYER
COUNTY RECORDER

BY *[Signature]* DEPUTY *[Signature]*