

A 361676

Certified, Filed and or Recorded on
Nov. 07, 2008 AT 02:23PM

Signed: JU
MARILYN J NOVAK B V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 16, Township 37N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:


On 10/29/08 found a 1/2" IRON PIPE OPEN DOWN 0.3'

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

9
16

F I E L D

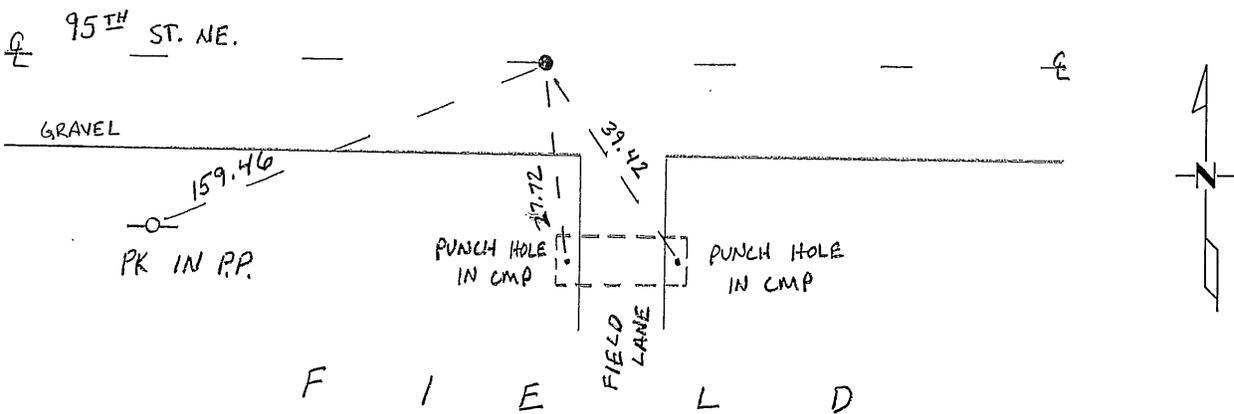

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Juan W. O'G
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

PAGE 1 OF 2

Benton County Surveyor's Office
Jason W. Oberg, Deputy County Surveyor
Minnesota License No. 45872

Statement of Evidence:

H163

North Quarter Corner of Section 16, Township 37 North, Range 29 West, Gilmanton Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked with a wood post with bearing trees noted as:

13" Blk Ash	N 5 W	39 links
7" Elm	S 22 E	27 links

2002 No resurvey information was found on this corner in the Benton County records.

2008 The County Surveyor's Office searched and found a ½" iron pipe along the centerline of an east-west gravel road (95th St. NE). Distances to the NW and NE Corners both measure 2581.46 ft. and corner falls 17.21 ft. north of a straight line. The position is accepted as marking the best evidence and ties were made.

County Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-153677.147
E-524081.866